

Pilot Rock

PARK · STREET · CAMP SITE PRODUCTS

Cherokee, Iowa • 800-762-5002 pilotrock@rjthomas.com • pilotrock.com

CATALOG #260

Park & Street Benches	5-27
Square Frame Benches — B130 Series	
Sign Benches B400 & B410 Series	6-7
Channel Bench — CXB Series	
Contemporary Bench — B120 Series	
Accessible Bench — BITU & BITT Series	
Contour Benches — WRB & OWRB Series	12
Wall Mount Bench — WMB Series	13
Trailside Bench — WB & OWB Series	13
Amherst Bench — B100 & B102 Series	14
Park Avenue Bench — BC3001 & BC4001 Series	
Classic Bench — CLB Series	
Grey Creek Bench — B30 Series	16
Silver Sioux Bench — B40 Series	17
Riverview Bench — B60 & B70 Series	
Gillette Bench — B80 Series	
Oak Knoll Bench — B90 Series	
Recycled Plastic Benches — RBF & RBB Series	
Locker Room & Buddy Bench	25
Signage & Accessories	26-27
Cover Caps	27
Park Tables	28-49
Universal Access Table — WXT, WPTS Series	28-29
Heavy Duty — UT Series	
Extra Heavy Duty — XT Series	31
Accessible Tables	32
Accessibility Compliance	33
Snow Load/Extreme Load Table Ratings	
Kid's Table — UTK, SQTK, T104K Series A-Frame Table — AT, WAT, AFT Series	
Caterpillar Table — T600 Series	
Light Duty — BT Series	
Recycled Plastic Table — RT, ART Series	39
Square Tables — Portable — SQT Series	40
Square Tables — Pedestal — PQT Series	41
Round Tables — T100, T200, T300, T400 Series	42-43 1/1
Twin Pedestal Table — TPT Series	45
Single Pedestal Table — PT Series	
Square Frame Picnic Tables & Utility Tables	
Food Court Table	47
Condiment Serving Table — CST Series	
Umbrellas	
Materials & Color Options	
•	
Waste & Recycling	. 54-75
Bear Resistant Trash Receptacle — BPRT Series	
Varmint Defiant Trash Can Cover — VDT Series	
Round Steel Strap Receptacle — CN-R/SS2 Series	
Round Perforated Steel Receptacle — CN-R/R Series	
Round Expanded Steel Receptacle — CN-R/D Series	57
Park Policeman — CN-EXP Series	
Trash & Recycling Receptacles — TRH & TRQ Series	58-59
Ash Receptacles — TRH, TRQ, AMR, & AMQ Series	59-60
Amherst Receptacles — AMR & AMQ Series	60
Round Cut Steel Plate Receptacle — CN-R/SP2 Series Steel Strap Receptacle with Door — CN-R/SS2-36D	bl
Square Frame Receptacle — CN-Q-36	
Square Receptacle with Door — CN-Q/SS4-36D	62
Vertical Wave Steel Strap Receptacle — CN-R/SS3 Series	63
Vertical Wave Steel Strap Ash Receptacle	63
Smoker's Stack	
Trash & Recycling Receptacle Lids	
Tradit & Necvellia Neceptacie & Ela Accessories	

Waste & Recycling C	ontinued
Trash Cans, Liners	69
Stationary Mounts for Trash and Ash Receptacles	
Trash Can Hangers	
Kolorcans Plastic Trash Receptacles	73
Lockable Steel Receptacle with Rain Bonnet — CN-R/SP3 Series.	73
Tilting Trash Receptacle — CN-TR-52 Series	
Pet Waste Stations — Pilot Rock & Dogipot	
Dog Park Products	
Products for DogsProducts for People	
Site Amenities	78-84
Food Lockers	
Lantern Poles	
Traffic BarriersTissue Dispensers	
Utility Tables	
Planters	
Custom Signs	85-87
Parking	88-93
Bike Racks	
Car Stops	
Speed Bumps	93
Park Grills	94-108
Accessible Grill — ASW, ASWS Series	94-95
Premier Series Grills — A, B, C, & D Series	96-97
Multilevel Grills — N, Q, H, J, K Series	
Covered Grills — EC SeriesShelterhouse Grills — Q3, P, L Series	104-105
Grill Station & Swivel Shelf	
Hot Coal Bin	107
Grill Accessories	108
Campfire Rings	. 109-120
FX Campfire Rings	
Stainless Steel Campfire RingsRemovable Cooking Grate	
Campfire Rings FA Series	
Campfire Rings FS Series	112
Multilevel Firering — L Series	
Large Group Firering — O Series	
ADA Campfire Ring GuidelinesAccessible Firerings — M, LDW, FSDW, FS, FSW Series	114-115
Swivel Grate Firerings	
Snow Load Rated Swivel Grate Firerings	117
Drop-in Cooking Grate for Firerings	
Campfire Ring Covers	
Utility Shelf	
Heat Shields	
Anchoring Systems for Firerings	
Anchor Kits	
California Proposition 65 Warnings	
Warranty, Ordering Information	123




Most products available on GSA Contracts

OFFICE HOURS:

8am - 5pm CST Monday - Friday. Closed weekends and holidays.

Pilot Rock

Check out these Online Features

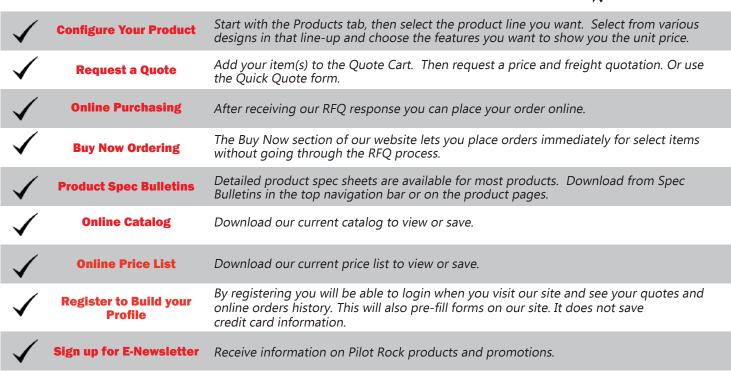

To Help Us Serve You More Quickly...

Free Tools & Tips

When contacting us by phone or e-mail to request product information or a price quote, please have the following product details ready:

TABLES AND BENCHES

Model Series: For example, XT Series picnic table or CXB Series bench.

Preferred Frame Installation: Portable, surface mount or embedded frame posts. **Preferred Frame Finish:** Such as galvanized, or powder coated with color choice.

Desired Length: For example, 4 foot, 6 foot, 8 foot, 10 foot, 12 foot.

Top/Seat/Back Material: Such as lumber, recycled plastic or thermo-plastic coated steel.

Wheelchair Accessible: For example, end or side access on a table.

TRASH AND RECYCLING

Model Series: For example, TRH Series or Amherst Series.

Desired Shape: Such as round or square.

Required Capacity: Such as 32 gallon or 55 gallon.

Preferred Material: For example, lumber, recycled plastic or thermo-plastic coated steel.

Lid Function: Collecting trash or recyclables.

Type of Lid: Flat or domed, steel or plastic and which color.

Choice of Mounts: For receptacle - surface mount or permanent pedestal mount.

GRILLS AND FIRE RINGS

Model Series: Such as A-20 or FS-30.

Size: Square inches of cooking area desired or firering diameter.

Cooking Grate Adjustment: Infinitely Adjustable, multilevel or single level.

Installation Method (grills): Embedded post, bolt down base plate, disk base or caster base. **Installation Method (firerings):** For example, tip back anchor pins or spade anchors.

With this information at hand, Customer Service can quickly provide you with a complete Model Number for reference and a price quote including all of the requested features. Please help us serve you better by having as much of this product information available when you contact us.



NEW PRODUCTS

Food Court Table with Fiberglass
Seats and Top 47
Condiment Serving Table 47
Covered Steel Receptacle with Side Door
Dog Park Products
Trail Side Food Locker
Divided Food Locker 79
Stainless Steel Accessible Grill 94
Removable Cooking Grate for Stainless Steel Firering
Snow Load Firering



Coordinate Products for the look you want!

Tables, Benches and Trash Receptacles can be coordinated by selecting matching materials... lumber, aluminum, recycled plastic, thermo-plastic coated expanded, perforated or formed steel plate, and the frame finish... and by selecting matching or complimentary colors. See Pages 50-53.

Increase company, organization, school, or sports team visibility by coordinating colors and adding custom signage to benches, tables, and receptacles. See Pages 26-27.






Square Frame Benches



Model B132/CN-6PC contour park bench, 6 ft. long, with green powder coat frame finish and cedar colored recycled plastic planks.

- **B130 Series** Benches offer a clean cut frame design with inlaid seat and backrest planks.
- · Two bench styles:
- Model B130 is a flat bench.
- Model B132 includes a backrest and armrests.
- Surface mount installation only. Anchor bolts not included. See Page 121.
- Available in 4, 6 or 8 ft. lengths.
- Rugged all steel, welded component construction. End frames are 2" x 2" x 11 ga. square steel tube. Seat/backrest framework is 1" x 2" x 14 ga. rectangular steel tube, with formed steel channel reinforcements in seat. All open ends are welded closed with steel end caps.
- All steel frame components have a powder coat finish. See Page 50.
- Seat and back inlay materials: 100% recycled plastic in choice of colors. Seat planks are 2" x 4" nom. and backrest planks are 1" x 4" nom. See Page 53. All inlaid planks are installed at the factory.
- Assembly of end frames to seat/backrest components is required.

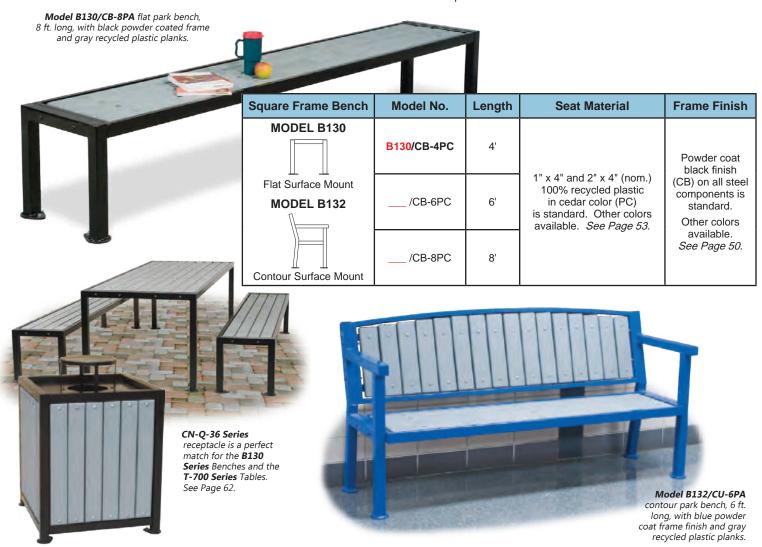

Sign Benches



Get the word out. Promote an event. Recognize achievement, a donation, or memorial.

Contour Seating

- All steel fabrication with 10 ga. cut steel formed contour seat and
- Thermo-plastic seat coating in your choice of colors. See Pages 51-52.
- Frame legs are 2-3/8 in. OD steel pipe.
- Embedded frame post or surface mount installation. (Anchors not included, see Page 121).
- Powder coat frame finish in your choice of colors. See Page 50.
- Includes seat dividers (bolt on) for 6 ft. and 8 ft. benches.
- Includes steel plates on bench frames for a custom decal if desired (identify a bus stop, street address, ownership, etc.). See (\mathbf{D}) .
- Optional: 2-part aluminum cover caps for B400 and B401 frame posts. See Page 27.









Top cap opens for total access to the sign frame. Cap can be padlocked

The back support slides in and out of the sign frame. (Note: board is not painted to better show detail.)



green thermo-plastic coated contour seat.



The sign board slides in front of the back support. Your sign can be replaced as often as you want.



Contour Seating		Model Number Insert Model Number prefix for bench style choice	Length (ft.)	Seat Dividers	Seat Material and Finish	Frame Finish	Sign Size H x W
MODEL B400	MODEL B400	B400/CB-4SP/TB	4	0	Cut 10 ga. steel plate seat and sign frame.	Powder coated	24" x 48"
Surface Mount MODEL B401 Embedded Mount	/CB-6SP/TB	6	2	Thermo-plastic coated black (/TB) is standard. Other colors available. See Page 51-52.	black(/CB) is standard. Other colors available. See Page 50.	24" x 72"	
	/CB-8SP/TB	8	3			24" x 96"	

Sign Benches

BENCHES

Classic Seating

- All steel fabrication: steel sign frame, expanded steel or perforated steel or steel channel seat. Seat is 2-1/2 in. x 12 in. wide (nom.).
- Thermo-plastic seat coating in your choice of colors. See Pages 51-52.
- Frame legs are 2-3/8 in. OD steel pipe, with formed channel seat and back support.
- Installation options: Embedded frame post, portable/surface mount, or bolt down base plate mount. (Anchors not included, see Page 121).
- Hot dip galvanized or powder coat frame finish. See Pages 50.

Both Sign Bench Models Offer:

company (use max. 1/4 in. thick material).

sign cannot be removed when cap is closed.

• **Optional:** 2-part aluminum cover caps for B411 and B412 frame posts. *See Page 27.*

Black painted 3/4 in. MDO Sign Board back support for sign.
 Optional: Custom made Pilot Rock Sign features: .040 ga. Alumilite aluminum laminate, 1/4 in. thick, polycarbonate core, a 3M vinyl digitally printed graphic material, a 3M protective lamination over

• Order/reorder signage from Pilot Rock Signs or your local sign

• Sign graphic can be replaced as often as you want. Just open the

• Hinged top cap closes the sign frame and can be padlocked to secure the sign (padlocks not included — order (2) #PL-1). The

Bloc Floring Floring Parties Cherokes M. 225-5711 205 Indian Street Cherokes M.

Model B410/G-8VR portable/surface mount, hot dip galvanized frames, 8 ft. long, expanded steel seat, red thermo-plastic coated seat and sign frame.

Model B410/G-4VU Sign Bench, portable/surface mount, hot dip galvanized frames, 4 ft. long, blue thermo-plastic coated expanded steel seat and sign frame.

top cap and slide it out.

the graphic.

◀ The back support slides in or out of the sign frame. (Note: board is not painted to better show detail.) Top cap is shown open.



◀ The top cap is hinged at both ends and easily lifts up and tips behind the bench. It's easy to install or replace your sign.



◄ The top cap can be padlocked in the closed position to secure your sign until you want to replace it.

Classic Seating		Model Number Insert Model Number pre- fix for bench style choice	Length (ft.)	Seat Material and Finish	Frame Finish	Sign Size H x W
		B410/ G-4VB	4	Black thermo-plastic coated expanded steel		16" x 48"
MODEL B410 Surface Mount		/G-6VB	6	(VB) Other colors available. See Page 52.		16" x 72"
	9	/G-8VB	8		Hot dip galvanized	16" x 96"
MODEL BA11	MODEL B411 Embedded Mount	/G-4HB	4	Black thermo-plastic coated perforated steel (HB) Other colors available.	finish (/G), or Black powder coat finish (/CB). Other colors available. See Page 50.	16" x 48"
		/G-6HB	6			16" x 72"
		/G-8HB	8	See Page 52.		16" x 96"
MODEL B412 Bolt-down Mount	/G-6SC/TB	6	Black thermo-plastic coated formed steel channel (SC/TB)		16" x 72"	
Boil-down Would		/G-8SC/TB	8	Other colors available. See Page 51.		16" x 96"

Pilot Rock 31/16/14

Channel Bench

Our Most Versatile Bench

- Model CXB Bench is an extra heavy bench designed to be stronger and more stable with a simple, clean design.
- Model PCXB portable/surface mount, 9/16" dia. anchor holes in frame foot.
- Model SCXB stationary/embedded frame post installations.
- All welded frame construction: seat/back support channel is die-formed 1/8" thick (11 ga.) steel; frame posts and portable foot are 2-3/8" OD steel pipe.
- · Hot dip galvanized finish and fasteners maximize protection from the elements
- Optional: Powder coated frame finish. See Page 50.
- · Seat/back plank materials include: pressure treated pine lumber, clear anodized or powder coated aluminum, 100% recycled plastic, coated expanded or perforated steel planks, or formed steel channel with thermoplastic coat finish. See Pages 50-53.
- Benches can be 4, 6, 8, 10, 15, 16, 21, or 24 feet long (depending on seat/ back material selected).
- Optional: Armrests can help make bench more accessible. See Page 11.
- Optional: Custom engraved lettering is available on recycled plastic; or plastic laminate plaques are available on lumber or recycled plastic; custom punched lettering is available on perforated steel. See Pages 26-27.
- Optional: Surface anchors for PCXB. See Page 121.

• Optional: 2-part aluminum cover caps for SCXB frame posts.

See Page 27.

(Below) Model PCXB/G-4PN24, portable, galvanized frames, 4 ft. long, 2" x 4" green recycled plastic planks. Shown with optional engraved identification.



(Above) Model SCXB/CB-6AU, embedded mount, 6 ft. long with black powder coat frames and blue powder coat aluminum back and seat.



Model SCXB3/CU-6PY24 embedded mount, 6 ft. long, three blue powder coated frames, 2" x 4" yellow recycled plastic planks.



Model PCXB/G-6TP24, portable, galvanized frames, 6 ft. long, 2" x 4" (nom.) treated pine planks.



Model PCXB/G-6VU10, portable, galvanized frames, 6 ft. long, 2" x 10" blue thermo-plastic coated expanded steel seat and back planks.

STATIONARY / EMBEDDED INSTALLATION											
SCXB	Material	Material Thickness and Width (in. nom.)	Bench Length (ft.)	Configuration							
	Treated Pine	2 x 4	4, 6, 8								
	Lumber	2 / 4	15								
			4, 6, 8								
	Aluminum	2 x 10	15								
			21, 24								
	100% Recycled	2 x 4	4								
	Plastic	2 % 4	6								
Stationary,	Expanded Steel	2-1/2 x 10	4, 6, 8, 10, 16								
Embedded Frame Post	Perforated Steel	2-1/2 x 12	4, 6, 8, 10, 16								
	Formed Steel Channel	2 x 11	6, 8								



Model PCXB3/G-15AL, portable, galvanized frames, 15 ft. long, 2" x 10" (nom.) clear anodized aluminum planks.



Model PCXB/G-6HW12, portable, galvanized frames, 6 ft. long, 2" x 12" (nom.) brown thermo-plastic coated perforated steel seat and back with custom lettering.

PORTABLE / SURFACE MOUNT INSTALLATION									
РСХВ	Material	Material Thickness and Width (in. nom.)	Bench Length (ft.)	Configuration					
			4	ŦŦ					
	Treated Pine Lumber	2 x 4	6, 8						
			15						
			4						
\land	Aluminum	2 x 10	6, 8						
\\			15						
			21, 24						
	100%	0.1.4	4						
	Recycled Plastic	2 x 4	6						
Portable, Surface	Expanded		4						
Mount Frame Foot	Steel	2-1/2 x 10	6, 8						
	Perforated	2-1/2 x 12	10						
	Steel		16						
	Formed Steel Channel	2 x 11	6, 8						

Channel Bench

Our Most Versatile Bench

- Model CXB Bench is a durable, uncomplicated style that fits in anywhere— public parks, streetscapes, schools, athletic fields, pools, rec centers, campgrounds, patios, and other public areas.
- The CXB bench offers the features to coordinate with school colors, playground designs and any interior or exterior landscape theme.
- **Optional:** Coordinate with picnic tables, trash receptacles, and planters using the same materials.



Model PCXB/G-6VW10 portable, galvanized frames, 6 ft. long $2" \times 10"$ (nom.) brown thermo-plastic coated expanded steel back and seat. Shown with optional **Model AR/TW-7** thermo-plastic coated armrests.



Model PCXB/G-6SC/TN portable, galvanized frames, 6 ft. long, formed steel channel seat and back components with green thermo-plastic coating.



Shop Online at pilotrock.com

Join our e-newsletter for the latest information and promotions . . . go to **pilotrock.com**



Model B122/CB-4SP/TA contour bench, surface mount, black powder coated frames, 4 ft., cut steel plate seat with gray thermo-plastic coating.

- Optional: #ANC3-4 concrete screw anchors for surface mounting. See Page 121.
- Optional: 2-part aluminum cover caps for B121 and B123 frame posts. See Page 27.

Contemporary Steel Bench

- Model B120 all steel bench offers a contemporary design with armrests and a
- All heavy gauge steel fabricated components: 2-3/8" OD steel pipe frame post and surface foot, 7 ga. steel armrest, and choice of four steel seats.
- Seat materials include: 3/4-#9 expanded steel, 14 ga. perforated steel and 10 ga. cut steel plate each with thermo-plastic coating; or welded steel strap with powder coat finish. See Pages 50-52 for colors.
- Frame posts and armrests are powder coated. See Page 50 for colors.

• Installation: Surface mount and embedded post designs available.

• 4, 6, or 8 ft. lengths.






Model B122/CB-6DU contour bench, surface mount, black powder coated frames, 6 ft., expanded steel seat with blue thermo-plastic coating.



Model B122/CA-4RR contour bench, surface mount, gray powder coated frames, 4 ft., perforated steel seat with red thermo-plastic coating.



Model B120/CU-6DA flat bench, surface mount, blue powder coated frames, 6 ft., expanded steel seat with gray thermo-plastic coating.

STE BEN	MODEL NO. Insert Model Number prefix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	FRAME CONFIGURATION		
MODEL B120 FLAT SURFACE MOUNT MODEL	B120/CB-4DW	4	Brown Thermo-plastic Coated Expanded Steel (DW)				
B121 FLAT EMBEDDED MOUNT MODEL B122 CONTOUR SURFACE	/CB-6DW	6	or Perforated Steel (RW) is standard. Other color choices available, see Page 52. Other materials available: Brown Thermo-plastic coated Cut Steel Plate (SP/TW). Other color choices available, see Page 51.	Other color choices available, see Page 52. Other materials available: Brown Thermo-plastic coated Cut Steel Plate (SP/TW). Other color choices available, see Page 51. Black fit (/CB) on fit and armrestandard. colors available, see Page 51.	Other color choices available, see Page 52. Other materials available: Brown Thermo-plastic coated Cut Steel Plate (SP/TW). Other color choices available, see Page 51. Black finish (/CB) on frame and armrests is standard. Other	(/CB) on frames and armrests is standard. Other colors available,	Surface Mount
MODEL B123 CONTOUR EMBEDDED MOUNT	/CB-8DW	8	Other color choices available, see Page 50.		Embedded Mount		

BENCHES

Accessible Bench



- The full-length grab bar across the back of the bench enhances access and transfer to or from this bench.
- All welded frame fabrication: seat/back support channel is die-formed 1/8" thick (11 ga.) steel, frame post and portable/ surface mount foot are 2-3/8" OD steel pipe.
- · Hot dip galvanized finish is standard.
- Optional: Powder coat finish. See Page 50 for colors.
- **Model B110C:** 6 ft., surface mount, grab bar 35" high, seat width 20", seat height 18-1/2" (nom. dimensions), includes 9/16" dia. anchor holes in foot. *See Page 121 for optional anchor bolts.*
- Model B111C: 6 ft. embedded frame installation.
- Seat/back plank materials include 2" x 4" (nom.) treated pine, or 100% recycled plastic. See Page 53 for color choices.
- **Optional:** Custom engraved lettering on recycled plastic; or plastic laminate plaques are available on lumber and recycled plastic. *See Pages 26-27.*

• **Optional:** 2-part aluminum cover caps for B111C frame posts. *See page 27.*







(Above) **Model B110C/G-6TP24** accessible bench, hot dip galvanized frames, 6 ft., 2" x 4" treated lumber seat planks.

Armrests available on selected benches . . . sold individually

							R	
Benches	B78, B79	Ī	PCXB, SCXE	3	PCXB, SCXB	PWRB, SWRB, OWRB	WB, OWB	B94
Model #	AR/C ♦ -13	AR/T♦-2	AR/T ♦ -7	AR/T ♦ -9	AR/ ♦ -1	AR/ ♦ -4	AR/ ♦ -6	AR/C ♦ -10
Bench Seat Material	Expanded or Perforated Steel	2-1/2" x 10" or 2-1/2" x 12" Perforated Steel	2-1/2" x 10" Expanded Steel	2-1/2" x 12" Expanded Steel	Wood or Recycled Plastic 2" x 4" or 2 "x 10" planks	Wood or Recycled Plastic 3" x 4" timbers	Wood or Recycled Plastic 3" x 4" timbers	Steel Strap or Steel Plate seat Color matches seat (not available for wood or recycled plastic)
Location	Center	E	End or Cente	r	End or Center			Center
Armrest Material and color	2-3/8" OD steel Pipe /C♦ Indicates color of powder coated finish. Color matches frames. See Page 50.	3/16" x 2" steel /T♦ Indicates color of thermo-plastic coating. Color matches seat. See Page 52.			3/16" x 2" galvanized steel (/G) Optional: Powder coat finish, /C♦ Indicates color of powder coated finish. Color matches frame. Armrest pad matches seat material. See Page 50.			Cast Iron /C♦ Indicates color of powder coated finish. Color matches seat. See Page 50.

Pilot Rock 341(4)143

Model PWRB3/G-8PC34 portable, galvanized frames, 8 ft. long, 3" x 4" recycled plastic timbers in cedar color. Model SWRB illustrating embedded frame post installation.

Model PWRB/G-6CO34 portable/surface installation, galvanized frames, 6 ft. long, 3" x 4" construction heart redwood timbers, two optional AR/G-4CO armrests.

Contour Benches

Available in two different frame styles:

- WRB style bench uses multiple leg posts.
- · Model PWRB: portable/surface mount.
- Model SWRB: stationary/embedded frame post installations.
- Model WRB Benches offer all welded frame construction, 2-1/2" sq. steel tube for leg post, 3/8" thick steel for seat bracket and portable model frame foot.
- Model WRB Benches can be 4, 6, or 8 ft. long, using 2 or 3 frames (depending on seat material).
- **OWRB** style bench is designed to use just a single large central support post for permanent locations. The single post allows for easier maintenance around bench.
- Model OWRB: standard with an embedded post installation.
- Model OWRB/P: surface mount bolt down base plate installation.
- · Model OWRB benches offer single piece all welded frame construction, a 4" sq. steel tube for the support post, a 2-1/2" sq. steel tube crossarm, 3/8" thick steel seat brackets, and a 3/8" x 10" sq. base plate for the optional surface installation.
- Model OWRB benches can be 4 or 6 ft. long.

Both Contour Bench models offer:

- Seat timber materials include: 3" x 4" (nom.) construction heart redwood lumber (other species available when in stock, please inquire), or 3" x 4" (nom.) 100% recycled plastic available in many colors. See Pages 51, 53.
- Hot dip galvanized finish and galvanized fasteners maximize protection from the elements.
- Optional: Powder coated frame finish. See Page 50.
- Optional: Armrests help make benches more accessible. See Page 11.
- Optional: Engraved personalization on recycled plastic, or custom laminate plaques available on lumber and recycled plastic. See Pages 26-27.
- Optional: Anchor kits for surface mounting Models PWRB and OWRB/P. See Page 121.



(Left) Model OWRB illustrating standard embedded frame post installation.



(Above) Model OWRB/P/G-6CO34 surface installation with optional base plate, hot dip galvanized frame, 6 ft. long, 3" x 4" construction heart redwood timbers.

Wall Mount Bench

- Model WMB Wall Mount Bench is a natural for pools, athletic facilities, locker rooms, building entrances, and parks.
- Bench can be 4 ft. long (two frames), 6 or 8 ft. (three frames), or 8 ft. long with plastic seat planks (four frames).
- Wall bracket is 10 ga. formed/welded channel, galvanized finish.
- Optional: Powder coat frame finish in choice of colors. See Page 50.
- Includes galvanized fasteners to attach seat to frame. Does not include wall anchors (each bracket includes three 7/16" dia. wall anchor holes).

Seat Materials	Plank Size (nom.)	Seat Width	Front Edge to Wall
Treated Pine	2" x 4"	11"	14-1/2"
100% Recycled Plastic	2" x 4"	11"	14-1/2"
Aluminum	2" x 10"	10"	15-1/2"
Expanded / Perforated Steel	2-1/2" x 12"	12"	14-3/16"
Formed Steel Channel 6', 8'	2" x 11"	11"	14-1/2"



Model WMB3/G-6PU24 Wall Mount Bench, 6 ft., three hot dip galvanized frames, 2" x 4" blue recycled plastic seat.



Both Trailside Benches offer:

- · Hot dip galvanized frame finish and galvanized fasteners.
- Optional: Powder coated frame finish. See Page 50.
- Seat timber materials include: 3" x 4" (nom.) construction heart redwood lumber (other species available when in stock, please inquire), or 3" x 4" (nom.) 100% recycled plastic. See Pages 51, 53.
- **Optional:** Concrete screw type anchors are available for Model PWB and OWB/P surface mount bench frames. *See Page 121*.



Model WMB3/CB-6PC24 Wall Mount Bench, 6 ft., three black powder coated frames, 2" x 4" Cedar colored recycled plastic seat planks.



Model WMB3/G-8VN12 Wall Mount Bench, 8 ft., hot dip galvanized frames, 12" wide green thermo-plastic coated expanded steel seat.

Trailside Benches

- Equally suited to woodland trailside or urban landscape setting.
- Model WB Bench offers all welded frame fabrication using 2-1/2" sq. steel tube for leg posts, 3/8" thick steel for seat bracket and portable model frame foot.
- Model PWB: portable/surface mount.
- Model SWB: stationary/embedded frame installations.
- Benches can be 4, 6 or 8 feet long, seat is 16" wide (nom.).
- Optional: Armrests make benches more accessible. See Page 11.
- **Model OWB** Bench offers a wider seat and a single support structure fabricated using a 4" square steel tube center post with a 2-1/2" sq. cross seat support.
- Two installation methods:
 - Model OWB with embedded post.
 - **Model OWB/P** with 10" sq. base plate for surface anchoring.
- Benches can be 4 or 6 feet long, seat is 24" wide (nom.).



AR/G-6PN armrests.


Pilot Rock : 34N(6):143



Model BC4001/CB-6PC, black frames, 6 ft. long, cedar colored planks.

Amherst Bench

- All steel fabrication. 3/16" thick (7 ga.) steel seat and back sections. 2" sq. x 11 ga. wall steel tube frame structures.
- 6 ft. long. Two styles: Contour (with back) and flat (no back).
- Portable/surface mount with anchor holes in frame feet.
- Powder coated finish. Choice of colors. See Page 50.
- Simple to assemble. Contour bench has only 4 pieces: seat, back and 2 frames. Flat bench has only 3 pieces.
- Optional: Round metal plaques. See Page 27.
- Optional: Surface anchor kits. See Page 121.
- Match with the Amherst Trash Receptacle. See Page 60.
- Alternate backrest designs available. Samples below:




Park Avenue Bench

- Comfortable, classic styling using low maintenance components.
- 2 seating styles: Flat or with backrest in 4, 5, 6, or 8 ft. lengths (8 ft. benches use 3 frames).
- Cast aluminum frames. Available in 6 colors of polyester powder coat finish: hunter green, red, brown, black, dark gray, white.
- Seat and backrest planks are 2" x 4" (nominal) 100% recycled plastic. Available in many colors. See Page 53.
- Portable/surface mount frame design. Frame feet include anchor holes to secure to surface.
- Optional: Surface anchor kits. See Page 121.

Model BC3001/CN-6PN. green frames, 6 ft. long, green planks.





(Left) **Model GBA/CB-4PW24,** 2 frames, 4 ft. long, 100% recycled plastic 2" x 4" planks in brown color.



Model CLB/G-4HW, 4 ft., redwood stained hardwood slats.

Gibraltar Bench

- Model GBA Bench uses ornate, cast aluminum frames.
- Portable/surface mount with anchor holes in frame feet. (Anchors not included.) See Page 121.
- Black powder coat frame finish is standard. Other colors available. See Page 50.
- 4, 6, or 8 ft. lengths.
- Lumber: 2" x 4" (nom.) seat/back planks of pressure treated #1 southern yellow pine. (8 ft. bench uses 3 frames).
- 100% Recycled Plastic: 2" x 4" (nom.) seat/back planks of 100% recycled plastic available in many colors. *See Page 53.* (6 ft. bench uses 3 frames. 8 ft. bench uses 4 frames).
- **Optional**: Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. *See Page 26.*



Classic Bench

- **Model CLB** Bench incorporates one-piece welded end frames, die formed from structural channel, strong, light weight design. Diagonal braces provide support and stability.
- Portable/surface mount with anchor holes in frame feet. (Anchors not included.) See Page 121.
- Frames are hot dip galvanized after fabrication for maximum protection from weather.
- Lengths: 4 or 6 ft. long.
- Lumber: 3/4" x 3" Redwood stained hardwood slats. (6 ft. model uses additional formed center channel for support).
- 100% Recycled Plastic: 1" x 3" (nom.) seat/back slats of 100% recycled plastic available in many colors. *See Page 53.* (4 ft. bench uses extra formed center channel for support. 6 ft. bench uses 3 frames.)



Model CLB/G-6HW, 6 ft. long, redwood stained hardwood slats.



Model CLB3/G-6PC13, 3 frames, 6 ft. long, 100% recycled plastic slats, cedar color.



Model CLB/G-4PN13, 4 ft. long, 100% recycled plastic slats, green color.



Model B32/CB-4PA34, surface mount, black powder coated frames, 4 ft. long, with 3" x 4" gray recycled plastic timbers.

Grey Creek - B30 Series Bench

- Rugged, welded steel component frame structures, offering a wide-surface armrest made with flat steel plate.
- Surface mount or embedded installation.
- Frames can be hot dip galvanized or powder coated with your choice of colors. See Page 50.
- All end frames have armrests for improved access and comfort.
- Contour style or flat designs available in 4, 6, or 8 ft. lengths.
- 6 ft. benches with plastic timbers and all 8 ft. long benches have a center support without armrest.
- Seat timbers are 3" x 4" (nom.) available in: construction heart redwood or 100% recycled plastic. See Pages 51 & 53.
- Optional: Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. See Page 26.
- Optional: Surface mount anchors available. See Page 121.







(Left) Model B32C/CN-8CO34, contour, surface mount, green powder coated frames, 8 ft. long, with 3" x 4" construction heart redwood timbers.

GREY CREEK SERIES	MODEL NO. Insert Model Number prefix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	FRAME CONFIGURATION
MODEL B30 FLAT SURFACE MOUNT	/CB-4CO34	4			
	/CB-6CO34	6	3" x 4" (nominal) Construction Heart Redwood (CO) is standard. <i>See Page 51.</i>	Powder Coated Black finish (/CB) is standard. Other colors available, see Page 50. A Hot Dip Galvanized finish (/G) applied after fabrication is also available on this model.	
MODEL B31 FLAT EMBEDDED MOUNT	C/CB-8CO34	8			
MODEL B32 CONTOUR SURFACE MOUNT	/CB-4PC34	4	3" x 4" (nominal) Cedar colored		
	C/CB-6PC34	6	(PC) 100% Recycled Plastic is standard. Other colors available,		
MODEL B33 CONTOUR EMBEDDED MOUNT	C/CB-8PC34	8	see Page 53.		

BENCHES





Model B42C/CN-6PC34 contour, surface mount bench, 6 ft. long, with green powder coated frames and $3" \times 4"$ cedar colored recycled plastic timbers

Silver Sioux - B40 Series Bench

- Welded steel component frame fabrication for strength, round steel tube armrests for a softer appearance.
- · Surface mount or embedded installation.
- Frames are powder coated in your choice of colors. See Page 50.
- All end frames have armrests for improved access and comfort.
- Contour style or flat designs available in 4, 6, or 8 ft. lengths.
- 6 ft. benches with plastic timbers and all 8 ft. long benches have a center support without armrest.
- Seat timbers are 3" x 4" available in construction heart redwood or 100% recycled plastic. See Pages 51 & 53.
- **Optional:** Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. *See Page 26.*
- Optional: Surface mount anchors available. See Page 121.







Model B42/CW-4PN34 contour, surface mount bench, 4 ft. long, with brown powder coated frames and green recycled plastic timbers

SILVER SIOUX SERIES		MODEL NO. Insert Model Number pre- fix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	FRAME CONFIGURATION
MODEL B40 FLAT SURFACE MOUNT		/CB-4CO34	4			
		/CB-6CO34	6	3" x 4" (nominal) Construction Heart Redwood (CO) is standard. <i>See Page 51.</i>		
MODEL B41 FLAT EMBEDDED MOUNT		C/CB-8CO34	8		Powder Coated Black finish (/CB) is standard.	
MODEL B42 CONTOUR SURFACE MOUNT		/CB-4PC34	4		Other colors available, see Page 50.	
		C/CB-6PC34	6	3" x 4" (nominal) Cedar colored (PC) 100% Recycled Plastic is standard. Other colors available, see Page 53.		
MODEL B43 CONTOUR EMBEDDED MOUNT		C/CB-8PC34	8	J		



Model B63/CW-4PC34, contour, embedded mount bench, brown powder coated frames, 4 ft. long with 3" x 4" cedar colored recycled plastic timbers.



Model B60/CN-4CO34 flat, surface mount, 4 ft. bench. Shown with green powder coated frames and 3" x 4" construction heart redwood timbers.

Riverview - B60 Series Bench

- Heavy steel pipe fabrication. Welded steel components for a stronger frame. Wider curves for a simple, clean appearance.
- Surface mount or embedded installation.
- Powder coated frames in your choice of colors. See Page 50.
- All frames have armrests for improved access and comfort.
- 2 Bench Styles: Contour or flat. Available in 4 or 6 ft. lengths.
- Seat timbers are 3" x 4" (nom.). Available in: construction heart redwood or 100% recycled plastic. Plastic timbers available in 4 ft. lengths only. See Pages 51 & 53.
- Optional: Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. See Page 26.
- Optional: Surface mount anchors available. See Page 121.

• Optional: 2-part aluminum cover caps for all B60 bench frame posts. See Page 27.



Model B63/CU-4PD34, 4 ft. long, blue powder coat frames, 3" x 4" weathered wood colored recycled plastic seat timbers.

RIVERVIEW SERIES	MODEL NO. Insert Model Number prefix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	FRAME CONFIGURATION
MODEL B60 FLAT SURFACE MOUNT	/CB-4CO34	4			
			3" x 4" (nominal) Construction Heart Redwood (CO) is		
MODEL B61 FLAT EMBEDDED MOUNT MODEL B62 CONTOUR SURFACE MOUNT	/CB-6CO34	6	standard. See Page 51.	Powder Coated Black finish (/CB) is standard. Other colors available, see Page 50.	
MODEL B63 CONTOUR EMBEDDED MOUNT	/CB-4PC34	4	3" x 4" (nominal) Cedar colored (PC) 100% Recycled Plastic is standard. Other colors available, see Page 53.		



Riverview - B70 All Steel Bench

- The same frame specifications and features as the Riverview Bench on Page 18, but becomes Model B70 series with:
- Four seat design materials. See Pages 50-52 for colors.
 - 3/4-#9 expanded steel with thermo-plastic coating.
 - 14 ga. perforated steel with thermo-plastic coating.
 - 10 ga. cut steel plate pattern with thermo-plastic coating.
 - Steel strap seat with powder coat finish.
- Available in 4, 6 or 8 ft. lengths. Flat or contour styles.
- **Optional**: Model AR/C-13 center armrest for contour seats using expanded or perforated steel. *See Page 11*.
- Optional: Surface mount anchors available. See Page 121.
- **Optional**: 2-part aluminum cover caps for all B70 bench frame parts. *See Page 27.*

Model B78/CA-6SS/CA surface mount, contour, 6 ft. gray powder coated frames and steel strap seat.





(Left) **Model B78/CB-6RY** 6 ft. long surface mount bench with black powder coat frames and yellow thermo-plastic coated perforated steel contour seat.



Model B77/CN-6DN embedded, flat, green powder coated frames, 6 ft., thermo-plastic coated expanded steel in green.

RIVERVIEW SERIES	MODEL NO. Insert Model Number prefix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	FRAME CONFIGURATION
MODEL B76 FLAT SURFACE MOUNT	B76/CB-4DW	4	Brown Thermo-plastic Coated Expanded Steel (DW) or Perforated Steel (RW) is standard.		p0000000000000000000000000000000000000
MODEL B77 FLAT EMBEDDED MOUNT MODEL B78	/CB-6DW	6	Other color choices available, see Page 52. Other materials available: Brown Thermo-plastic coated Cut Steel Plate (SP/TW). Other color choices available, see Page 51.	Powder Coated Black finish (/CB) is standard. Other colors available, see Page 50.	Surface Mount
MODEL B79 CONTOUR EMBEDDED MOUNT	/CB-8DW	8	Black Powder Coated Steel Strap (SS/CB) Other color choices available, see Page 50.		pagagagagagagagagagagagagagagagagagagag



black powder coat finish.

Gillette - B80 Series

Heavy cast iron end frames with a powder coat paint finish. See Page 50.

- Two seat styles: Flat or contour, with surface mount installation. 4 ft., 6 ft., or 8 ft. long. All stainless steel fasteners for assembly.
- · Four seat and back material choices:
 - Construction Heart Redwood, in 3" x 4" (nom.) sized timbers. See Page 51.
 - 100% Recycled Plastic in 3" x 4" (nom.) sized timbers. See Page 53.
 - Steel strap fabrication (SS), heavy gauge steel, and all welded construction, with powder coat finish. The frame components and seat structure will be powder coated in the same color.
 - Steel Plate seat design (SP) is a diamond pattern cut and formed from a single sheet of 10 ga. steel, and finished with powder coat paint.
- Optional: Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. Custom cut letters can be incorporated into the Steel Plate (SP) backrest design. Round metal plaques can be recessed into the backrest of the Steel Strap (SS) and Cut Steel Plate (SP) style seat. See Pages 26-27 for signage details.
 - Optional: See our matching planters on Page 84!
 - Optional: Surface anchor kits. See Page 121.



Optional round metal plaque available on contour steel benches.



Model B80/CN-6PY34 6 ft. flat bench, green powder coat finish, yellow recycled plastic seat.



GILLETTE	MODEL NO.	LENGTH		
SERIES	Insert Model Number prefix for bench style choice	(FEET)	SEAT MATERIAL	FRAME FINISH
	B80/CB-4CO34	4		Powder Coated Black finish (/CB) is standard. Other colors available, see Page 50.
	/CB-6CO34	6	3" x 4" (nominal) Construction Heart Redwood (CO) is standard.	
MODEL B80	/CB-8CO34	8	,	
FLAT SURFACE MOUNT	/CB-4PC34	4	3" x 4" (nominal) Cedar colored (PC) 100% Recycled Plastic is standard. Other colors available, <i>see Page 53.</i>	
	/CB-6PC34	6		
	/CB-8PC34	8		
	/CB-4SS	4	Heavy gauge Steel Strap seat (SS) fabrication with all steel component support structure, all welded construction, with powder coat paint finish,	Frame components and seats shall have Black powder coat finish as standard (/CB). Other colors available,
MODEL B82 CONTOUR SURFACE MOUNT	/CB-6SS	6		
	/CB-8SS	8	see Page 50.	
	/CB-4SP	4	Steel Plate seat design (SP) is a diamond pattern	
	/CB-6SP	6	cut and formed from a single sheet of 10 ga. steel, and finished with powder coat paint,	see Page 50.
	/CB-8SP	8	see Page 50.	


Model B80/CE-6SP

6 ft. flat bench, cut steel plate seat, burgundy powder coat finish.

Model B90/CB-4CO34 4 ft. flat bench, black powder coat frames, construction heart redwood seat. Model B94/CR-6PU34 6 ft. contour bench,

Oak Knoll - B90 Series

- Two seat styles: Contour with cast aluminum frames with armrests. Flat: with cast iron end frames. Powder coat paint frame finish in your choice of colors. *See Page 50*.
- Surface mount installation. 4 ft., 6 ft., or 8 ft. long. All stainless steel fasteners for assembly.
- · Four seat and back material choices:
 - Construction Heart Redwood, 3" x 4" (nom.) sized timbers. See Page 51.
 - 100% Recycled Plastic 3" x 4" (nom.) sized timbers. See Page 53 for colors.
 - Steel strap fabrication (SS), heavy gauge steel, and all welded construction, with powder coat finish. The frame components and seat structure will be powder coated in the same color.
 - Steel Plate seat design (SP) is a diamond pattern cut and formed from a single sheet of 10 ga. steel, and finished with powder coat paint.
- **Optional:** Engraved personalization on recycled plastic. Plastic laminate plaques on lumber and recycled plastic. Custom cut letters can be incorporated into the Steel Plate (SP) backrest design. Round metal plaques can be recessed into the backrest of the Steel Strap (SS) and Cut Steel Plate (SP) style seats. *See Pages 26-27 for signage details.*
- Optional: Surface anchor kits. See Page 121.
- **Optional:** Model AR-10 cast iron armrest, bolted in center, is available for contour Steel Strap and Steel Plate seat designs (not available on wood or plastic). Will be same color as bench. *See Page 11.*
- **Optional:** Check out our matching planters on Page 84!



red powder coat frames, blue recycled plastic seat.







OAK KNOLL SERIES	MODEL NO. Insert Model Number prefix for bench style choice	LENGTH (FEET)	SEAT MATERIAL	FRAME FINISH	
	B90/CB-4CO34	4			
MODEL BOO	/CB-6CO34	6	3" x 4" (nominal) Construction Heart Redwood (CO) is standard.	Powder Coated Black finish (/CB) is standard. Other colors available, see Page 50.	
MODEL B90 FLAT SURFACE MOUNT	/CB-8CO34	8	(,		
CAST IRON	/CB-4PC34	4	3" x 4" (nominal) Cedar colored (PC) 100%		
	/CB-6PC34	6	Recycled Plastic is standard.		
	/CB-8PC34	8	Other colors available, see Page 53.		
	/CB-4SS	4	Heavy gauge Steel Strap seat (SS) fabrication with		
MODEL B94 CONTOUR SURFACE MOUNT CAST ALUMINUM	/CB-6SS	6	all steel component support structure, all welded construction, with powder coat paint finish,	Frame components and seats shall have Black powder coat finish as standard (/CB). Other colors available, see Page 50.	
	/CB-8SS	8	see Page 50.		
	/CB-4SP	4	Steel Plate seat design (SP) is a diamond pattern		
	/CB-6SP	6	cut and formed from a single sheet of 10 ga. steel, and finished with powder coat paint,		
	/CB-8SP	8	see Page 50.		

Team Bench with an Equipment Deck — provides room for the players & their gear.

• Series B300 Team Bench available as:

Model B302: 6 or 8 ft. long, 2 frames;

Model B303: 12 or 15 ft. long, 3 frames; Model B304; 21 ft. long, aluminum only, 4 frames.

- End frames are one-piece, welded construction with a dieformed back, seat, and deck bracket of 2-3/8" x 1-1/2" x 1/8" nom. steel channel, and a 2-3/8" O.D. steel pipe.
- Includes 2" x 10" (nom.) seat and backrest planks for the team. Plus a 20" (nom.) wide (2 planks) full length deck behind the bench for stowing equipment bags and gear.
- Frame can be anchored to hard surface. Each frame includes two 7/16" dia. holes for anchor bolts (not included). The wide frame base makes this a stable bench on turf.h
- Standard: Hot dip galvanized finish on welded steel component frames.
- Standard: Aluminum planks with clear anodized finish.
- Optional: Powder coat finish on frames. See Page 50.
- Optional: Powder coat finish on aluminum planks.
- Optional: Concrete screw type anchors. See Page 121.
- Optional: 2" x 10" (nom.) pressure treated #1 southern yellow pine planks instead of aluminum planks.



Model B302/G-8AL Team Bench, hot dip galvanized frames, 8 ft. clear anodized aluminum seat and deck planks.



Model B303/CB-12AY at the big game.





B303/G-12TP21 Team Bench, three hot dip galvanized frames, 12 ft. long 2" x 10" treated pine

seat and deck planks.





Model B302/CB-6AL on the ball field.

Pair **Trash Receptacles** & benches together with team colors and engraved lettering so your school's fields and facilities show off school pride.



Model SAB/P/CA-4HR10, stationary surface mount, gray powder coated frames, 4 ft. long, 10" wide red thermo-plastic coated perforated

steel seat plank.

Model PAB/G-6VW10.

portable, galvanized frames, 6 ft. long, 2" x 10" (nom.) brown thermo-plastic coated expanded steel seat plank.

Athletic Bench — Round Post Portable or Stationary Use

- Durable bench for schools, ball fields, pools, athletic facilities of all kinds.
- AB Series Bench is flat (no backrest).
- Model PAB: Portable/surface mount, 9/16" dia. anchor holes in frame foot.
- Model SAB: Stationary/embedded frame installations.
- Model SAB/P: Stationary mount with bolt-down base plate.
- All welded frame construction: 3/16" seat angle; frame posts and portable foot are fabricated from 2-3/8" OD steel pipe.
- Hot dip galvanized finish and galvanized fasteners.
- Optional: Powder coated frame finish. See Page 50.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Pressure Treated Pine	4, 6, 8, 15
2x10 Aluminum - clear anodized finish	4, 6, 8, 15, 21, 24
2x10 Aluminum - powder coat paint finish	4, 6, 8
2-1/2x10 or 2-1/2x12 Thermo-plastic coated, V-type Expanded Steel, or H-type Perforated Steel	4, 6, 8
2x11 Thermo-plastic coated formed Steel Channel	6, 8


- **Optional:** Thermo-plastic coated perforated steel seats can be lettered for team or field identification. *See Page 27.*
- Optional: Surface anchor kits for PAB and SAB/P frames. See Page 121.
- Optional: 2-part aluminum cover caps for SAB and SAB/P frame parts. See page 27.

Athletic Bench — Rectangular Post Stationary Use

- Model APB with embedded frame posts provides a secure, permanent location.
- Model APB/P frame posts have 1/4" x 8" sq. steel bolt down base plates (anchor bolts not included).
- Bench can be 4, 6, or 8 ft. long.
- Two heavy pedestal posts of 3" x 6" x 1/8" wall rectangular steel tubing. Exposed ends of frame posts are sealed with welded on end caps.
- · Hot dip galvanized finish and galvanized fasteners.
- **Optional:** powder coated frame finish available in choice of colors. *See Page 50.*

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Pressure Treated Pine	4, 6, 8
2x10 100% Recycled Plastic	4, 6, 8
2x10 Aluminum - clear anodized or powder coat paint finish	4, 6, 8
2-1/2x10 or 2-1/2x12 Thermo-plastic coated V-type Expanded Steel or H-type Perforated Steel	4, 6, 8
2x11 Thermo-plastic coated formed Steel Channel	6, 8

- **Optional:** Thermo-plastic coated perforated steel seats can be lettered for team or field identification. *See Page 27.*
- Optional: Surface anchor kits for APB/P frames. See Page 121.

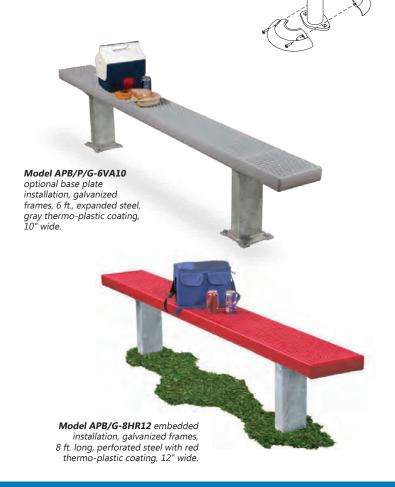

Pilot Rock 31/1/143







Model RBB/A-6A24 gray frames, 6 ft. long, gray 2" x 4" seat and back planks. All gray plastic offers a "concrete" look.



Model RBB/N-6C21 green frames, 6 ft., cedar 2" x 10" plastic planks with optional plaque

100% Recycled **Plastic Bench**

- **RB Series Benches feature frames** and planks molded from 100% recycled plastic.
- The RBB frames (with backrest) and RBF frames (flat) are 3" thick single piece solid molded plastic.
- Seat and back planks can be 2" x 4", 2" x 6", or 2" x 10" nominal dimensions, of solid molded 100% recycled plastic.
- Solid color is formed throughout plastic component. UV stabilizer added for ultraviolet protection.
- · Includes stainless steel screws for assembly.













- Two sizes available: 4 ft. long benches use 2 frames. 6 ft. long benches use 3 frames.
- Frame colors: black, brown or green. Other colors available as special order.
- Seat and back planks available in many colors. See Page 53.
- Portable by design. Attach to surface for permanent installation with optional anchor brackets. See Page 122.
- Optional: Engraved personalization and custom laminate plaques are available. See Pages 26-27.
- **Optional:** See our matching planters on Page 84!



Pilot Rock

Locker Room Benches

Built to survive indoors & outdoors



Model RBF/C-6D26 100% recycled plastic flat bench, 6 ft., as shown with cedar colored frames and weathered redwood colored 2" x 6" seat planks.

Model APB/P/G-6VA10 floor mount, galvanized frame finish, 6 ft., expanded steel seat plank with gray coating.

APB/P Series Floor Mount Bench

- Secure, stationary bolt down floor mount. Rectangular steel tube frames.
- · Galvanized frames won't rust.
- Optional colorful powder coat paint finish.
- Wide variety of seat materials. See Page 50-53.

◆ RBF Series 100% Recycled Plastic Frames and Seat Planks

- Plastic components are a solid, dense material that resists mold and mildew. Easy to clean, not affected by cleansers. Many colors to choose from. See Page 53.
- Portable, moveable for easy floor maintenance. Can be anchored.



Model WMB/G-4PD24 wall mounted bench, galvanized steel frames, 4 ft. long, 100% recycled plastic seat planks in weathered redwood color.

> **Model SAB/P/CA-4HR10** floor mount, 4 ft., gray powder coated posts, red thermo-plastic coated perforated steel seat.



WMB Series Wall Mount Bench A

- No floor obstructions, easy floor maintenance.
- Galvanized steel frames won't rust. Optional colorful powder coat paint finish.
- Wide variety of seat materials. See Pages 50-53.

SAB/P Series Floor Mount Bench A

- Secure, stationary bolt down floor mount. Round steel pipe frames.
- Galvanized frames won't rust. Optional colorful powder coat paint finish.
- Wide variety of seat materials. See Pages 50-53.

Buddy Bench - fostering friendships

- Many Pilot Rock park benches can become your Buddy Bench.
- Model B400 and B410 **Sign Benches** (pages 6-7) include custom backrest signs that offer the use of colorful graphics and photos.
- Model CXB Channel Benches (pages 8-9) with Perforated Steel seat/backrest can include the Buddy Bench identity in the backrest.
- Any of our benches with Recycled Plastic seat/backrest planks can be engraved with your Buddy Bench message. Resin filled letters will really make your message pop.
- Custom Plaques are an option on many benches using wood, plastic, and steel. These plaques offer color options ... even photographs ... that will enhance your friendly Buddy Bench message.
- Our B70, B80, and B90 series benches (pages 19-21) with the Laser Cut Steel Plate seat can be custom cut to incorporate your Buddy Bench message into the steel. Colorful finishes on the bench frames and seat will get your bench noticed.



Model SWRB3/CR-6PQ34

Contour embedded mount, red powder coated frames, 6 ft. long, 3" x 4", recycled plastic timbers, in multi-color. Plus your custom engraved message.





Model B410/G-4VU

Sign Bench, portable/surface mount, hot dipped galvanized frames, 4 ft. long, blue thermo-plastic coated expanded steel seat and sign frame. Plus your custom signage.

Signage & Accessories

With custom signage you can recognize memorials, donations, service, special occasions, ownership, schools and teams, anybody or anything you want, promote a service organization, and prevent theft. Message size limits vary by application. Contact us for custom design pricing.

Engraved Lettering



- · Engraved letters are available on benches, tables, and trash receptacles using recycled
- Letters can be filled with a colorful resin to increase visibility.
- · Resin fill is durable, weather resistant, color-fast. Many colors available.





Laminate Plaques

- Made from laminated impact acrylic. 3 ply thickness (1/8"). Plaques can be recessed (on wood and plastic only), or surface applied (on wood, plastic, steel, and aluminum). For picnic table tops, recessed plaques are available on recycled plastic only and require full edge caulking.
- Plagues are up to 2-1/2" x 11-3/4" wide.



Put your custom message in color or personalize your plaque with a photo!

- Rated for exterior usage, UV stable and outdoor weatherable. Matte finish, non-glare, contrasting surface and core colors.
- Surface/core color combinations include: matte black/gold, gloss black/white, white/crimson, patriot blue/white, almond/black, kelly green/white. Other colors may be available, please inquire.





Metal Plaques





















Some custom colors may be available. Please inquire.

- Silver or bronze colored border and raised letters.
- Background color is baked on. Choice of 4 colors: black, brown, maroon, green.
- Lightly textured, durable, lightweight, and resistant to the elements and wear.
- Two shapes: **Rectangular** (2-1/2" h. x 11-3/4" w.) Available on most benches using wood or plastic.

Round (6" diameter) Available on B78, B79, B82, B94, B102, B122 and B123 steel strap and cut steel plate contour benches.

Perforated Steel and Cut Steel Signage






- Perforated 2" x 12" steel benches (not contour), tables and receptacles can have custom lettering included. Number and size of letters limited.
- Benches with cut steel plate seats can include a custom cut design.





Cover Caps

- Two-part Cover Caps for Park Benches, Picnic Tables, Bike Racks and More.
- Each half is cast aluminum, with no coating. Requires 5/32-inch hex key (Allen wrench) to assemble (not included). Fasteners included.
- 2-1/2 inch diameter center hole will fit all 2-3/8" OD frame posts. 8-inch outside diameter.
- Available with aluminum finish to match galvanized frame posts. Or can be powder coated to match the painted frame finish.
- Order (1) Model CC-1 cover cap (2 halves) for each frame post.

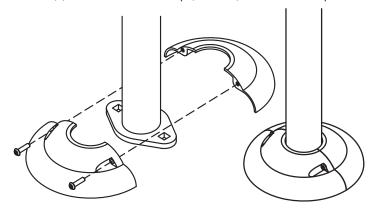

r can be powe	can be powder coated to match the painted frame finish.					
Model CC-1	Model CC-1 two-part Cover Cap can be an Optional Accessory on These Products					
Benches	S	B400, B401, B411 and B412 Sign Bench; SCXB Channel Bench; B121 and B123 Contemporary Bench; B111C Accessible Bench; B41 and B43 Silver Sioux Bench; B60, B61, B62, B63, B76, B77, B78 and B79 Riverview Bench; SAB and SAB/P Athletic Bench.				
Picnic Tab	ole	T600 Caterpillar Table, FCT Food Court Table				
Trash Receptacl	les	CN-TR-52 Tilting Trash Receptacle (embedded post); M2 and M8 Receptacle Mounting Post .				
Bike Rac	ks	HRE and HRP Hitching Post Rack; SRE and SRP Saddle Back Rack.				
Lantern Po	oles	LH-1, LH-2 and LH-180 Poles.				
Charcoal G	Grills	ASWS-20 B6S, ASWS-24 B6S, J-20 B6, NS-20 B6S, H-16 B6, H-16 B6X2, and GS-5				

Pilot Rock PICNC ABLES

Universal Access Table — **WXT Series**





WXT/G-8DR galvanized frames, 8 ft. long, expanded steel with red thermo-plastic coating.

- Model WXT Tables provide ADA compliant wheelchair access at both ends.
- · Full length seats offer full capacity seating
- Unique frame design includes two wheelchair spaces plus provides proper support under the outside ends of the full length seats.
- Meets or exceeds ADA guidelines for wheelchair access to picnic tables. See Page 33. Nominal under table clearance of 28 in., nominal seat height is 18".
- Lifetime frame warranty. See Page 123.
- Model WXT frames are constructed of 2-3/8" OD steel pipe, welded into a single piece structure for strength and easy assembly.
- Unique patented transverse frame leg under seat makes this a very stable table.
- Frame finish: Hot dip galvanized or powder coated. See Page 50 for colors.



U.S. PATENT NOs.

D489,539; D490,992; D493,291;

D496,799; D497,262; 6,918,630

Model WXT/CY-8PN

yellow powder coated frames, 8 ft.,

100% recycled plastic in green color.





Universal Access Table with Raised Top — **WXTH Series**

- Model WXTH Tables offer the same patented accessible design features of WXT Tables. Lifetime frame warranty. See Page 123.
- Table top is raised to allow most wheelchair armrests to fit under it for a closer approach. This is an advantage for some persons in wheelchairs and persons with certain physical restrictions.
- Exceeds ADA guidelines for wheelchair access to picnic tables. See Page 33. Nominal under table clearance of 31 in., nominal seat height is 19".
- Frame finishes: Hot dip galvanized or powder coated. See Page 50 for colors.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10, 12
Aluminum	6, 8, 10, 12
2x10 100% Recycled Plastic	6, 8
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8, 10
Formed Steel Channel	6, 8

Universal Access with Square Frame — WPTS Series

Universal Access Table Design

- Model WPTS Tables offer all the same accessible design features of the W Series Tables. See Page 28.
- · Accessible to wheelchairs at both ends plus full length seats for maximum capacity seating.
- Available lengths: 6 or 8 ft.
- Model WPTS provides ADA compliant wheelchair access at both ends. Nominal under table clearance of 29 in., nom. seat height is 18 in. See Page 33.
- Frames: welded 3" x 6" (nom.) x 1/8" wall rectangular steel tube for top and seat supports, connected with 2-1/2" (nom.) x 1/8" wall square steel tube.
- Frame Finishes: Hot dip galvanized or powder coated. See Page 50.

攀	SNOW LOAD RATED OPTION When equipped with V-Type expanded steel or H-Type perforated steel top/seats. <i>See Page 34</i> .
---	---

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8
Aluminum	6, 8
2x10 100% Recycled Plastic	6, 8
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8
Formed Steel Channel	6, 8

Model WPTS/G-8VW,

galvanized frames, 8 ft., thermo-

plastic coated expanded steel

with brown color.


U.S. PATENT NOs. D489,539; D490,992; D493,291; D496,799; D497,262; 6,918,630

Heavy Duty — UT Series

- Model UT Tables are designed for most public applications. Built rugged, but with less weight, easier to move.
- Model UT Tables feature our nontip, nontrip, walk through design. Won't tip even if all persons sit on one side. Easy walk through access. "Skid" design permits movement without damage to turf.
- All welded 1-5/8" OD steel pipe end frames (1.660" OD, 11 ga. wall, 1-1/4" ID nom. pipe specifications). Top/seat mounting brackets are 2" x 2" x 10 ga. die-formed steel angles.
- Frames supported by diagonal braces of 1-5/16" OD steel pipe attached to steel center channel. All 3/8" dia. galvanized carriage bolt fasteners. Lifetime warranty. See Page 123.
- Standard finish: Hot dip galvanized after fabrication.
- Optional frame finish: Powder coating (in place of galvanized finish). OR: Powder coating over hot dip galvanized finish available upon request only. See Page 50 for colors.
- Model UT Tables offer 30" nom. table height; 18" nom. seat height.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10, 12
Aluminum	6, 8, 10, 12
2x10 100% Recycled Plastic	6, 8, 10
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8, 10
Formed Steel Channel	6, 8

• Wheelchair Accessible Table Designs available: end access, side access, and raised top with end access. See Pages 32 & 33.

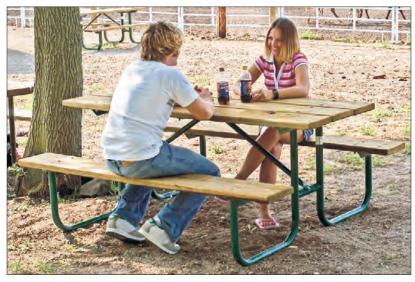

Model UT/CN-6UP, green powder coated frames, 6 ft., untreated pine lumber.





Model UT/G-6SC/TR, galvanized frames, 6 ft., formed steel channel top and seats, red thermo-plastic coated finish.

Extra Heavy Duty — XT Series

- Model XT Tables designed and constructed specifically for heavy use areas where unusually difficult service may be required.
- Model XT Tables feature our nontip, nontrip, walk through design. Won't tip even if all persons sit on one side. Easy walk through access. "Skid" design permits movement without damage to turf.
- All welded 2-3/8" OD steel pipe end frames (2.375" OD, 11 ga. wall, 2" ID nom. pipe specifications). Top/seat mounting brackets are 2" x 2" x 10 ga. die-formed steel angles.
- Frames supported by diagonal braces of 1-5/16" OD steel pipe attached to steel center channel. All 3/8" dia. galvanized carriage bolt fasteners. **Lifetime warranty**. See Page 123.
- Standard finish: Hot dip galvanized after fabrication.
- **Optional frame finish:** Powder coating available (in place of galvanized finish). OR: Powder coating over hot dip galvanized finish available upon request only. *See Page 50 for colors.*
- Model XT Tables offer 30" nom. table height; 18" nom. seat height.



Model XT/G-6UP, galvanized frames, 6 ft., untreated pine lumber.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10, 12
Aluminum	6, 8, 10, 12
2x10 100% Recycled Plastic	6, 8, 10
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8, 10
Formed Steel Channel	6, 8

• Wheelchair Accessible Table Designs available: End access, side access, and raised top with end access. *See Pages 32 & 33.*



Model XT/G-12UP galvanized frames, 12 ft., untreated pine lumber.





Model XT/CB-8AR, 8 ft. long, black powder coated frames, red powder coated aluminum top and seats.





Model XT/G-6PU, galvanized frames, 6 ft., 100% recycled plastic in blue color.

Pilot Rock PICNICTABLES



All of these Pilot Rock tables meet ADA guidelines for wheelchair accessibility. See Page 33.

End Accessible Tables


- Models UT (1-5/8" OD) and XT (2-3/8" OD) table frames can be used. See Pages 30-31. Tables offer 30" nom. table height; 18" nom. seat height.
- Top is extended 2 ft. beyond seats on one or both ends. Extended top is supported by a special diagonal brace and steel channel.
- Available lengths and materials:
 - 6 ft. seats and 8 ft. top (extended on one end, /E), with all materials.
 - 8 ft. seats and 10 ft top (extended on one end, /E) available with lumber, aluminum and recycled plastic.
 - 6 ft. seats and 10 ft. top (extended on both ends, /EE) available with lumber or aluminum only.

Raised Top, End Accessible Tables

- Models UTH (1-5/8" OD) and XTH (2-3/8" OD) are designed to provide more clearance under the table top to allow most wheelchair armrests to fit under it for a closer approach. Higher frames provide an under table clearance of 31". Tables provide 33" nom. table top height; 19" nom. seat height. See Pages 30-31.
- Top is extended 2 ft. beyond seats on one or both ends. Extended top is supported by a special diagonal brace and steel channel.
- · Available lengths and materials:
 - 6 ft. seats and 8 ft. top (extended on one end, /E) with all materials.
 - 8 ft. seats and 10 ft top (extended on one end, /E) available with lumber, aluminum and recycled plastic.
 - 6 ft. seats and 10 ft. top (extended on both ends, /EE) available with lumber or aluminum only.

Side Accessible Tables

- Models UT (1-5/8" OD) and XT (2-3/8" OD) table frames can be used. See Pages 30-31. Tables offer 30" nom. table height; 18" nom. seat height.
- Side Access Tables (/SA) take out a section of seating along side of table to provide wheelchair access right in the middle of activities.
- 6 ft. and 8 ft. tables provide one side opening. Two one-person seats are located on either side of wheelchair.
- 10 and 12 ft. tables feature two locations for wheelchairs, diagonally opposite each other. ADA guidelines require two wheelchair spaces on these larger tables. Each side includes a shorter one-person seat plus a longer seat to fit 3-4 persons.
- Diagonal braces are used to support and reinforce the table structure. Brace positioning allows wheelchair spaces to meet ADA clearance guidelines.
- Materials available: Lumber, aluminum; or recycled plastic (6, 8, and 10 ft only).



Pilot Rock accessible tables meet or exceed the guidelines as presented in the Federal Register, Dated June 20, 2007, Part II Architectural and Transportation Barriers Compliance Board, the ADA guidelines to wheelchair clearances for "picnic table" access as described on: Page 33, Part T306.2 Wheelchair spaces and Page 43, Part T404.2.5 Width.



Model XT/G-6PN/E 2-3/8" OD galvanized frames, 6 ft. seats, 8 ft. top extended 2 ft. one end, 100% recycled plastic in green color.





Model XT/G-6AL/SA 2-3/8" OD galvanized frames, 6 ft., clear anodized aluminum, side access opening for one wheelchair.



Model UT/G-12AL/SA 1-5/8" OD galvanized frames, 12 ft., clear anodized aluminum, two side access openings for two wheelchairs.

Accessibility Compliance

Many Pilot Rock Picnic Tables comply with ADA Guidelines for Wheelchair Accessibility.

Toe Clearance: Space from the surface to 9 in. (230mm) high shall be considered toe clearance; toe clearance shall extend 17 in. (430mm) minimum under the element; toe clearance shall extend 6 in. (150mm) maximum beyond knee clearance at 9 in. high; toe clearance shall extend 25 in. (635mm) maximum under an element; toe clearance shall be 30 in. (760mm) wide minimum.

Knee Clearance: Space from 9 in. (230mm) and 27 in. (685mm) above the surface shall be considered knee clearance; knee clearance shall be 11 in. (280mm) deep minimum at 9 in. (230mm) above surface, and 8 in. (205mm) deep minimum at 27 in. (685mm) above the surface; knee clearance shall extend 25 in. (638mm) maximum under the element at 9 in. (230mm) high; knee clearance shall be 30 in. (760mm) wide minimum.


These dimensions create a Clearance Box that must fit under the picnic table to be an ADA compliant table. Many tables claim to be "wheelchair accessible" but they might not be "ADA compliant". Below are illustrations of some popular Pilot Rock brand picnic tables and how they meet or exceed the ADA guidelines for Compliance.



WXT & WXTH Series tables, provide all the required knee and toe clearances at both ends. *See Pages 28 & 29.*




WPTS Series table offers ample room for the ADA Clearance Box to fit at both ends. See Page 29.






UT and XT Series tables with a two-foot extended top ("/E" in the model number) provide more than enough knee/toe space under the top. *See Pages 30-31*.



AT and AFT Series A-frame tables with a top extended one foot at each end meet accessibility guidelines. *See Pages 36-37.*



T600 Series "Caterpillar" Tables are ADA compliant at both ends. *See Page 38.*



RT Series and ART Series Plastic Tables offer extended end table top options to ensure ADA Accessibility can be met. *See Page 39.*



PQT-4 Series with one seat removed provides ample wheelchair access. *See Page 41.*



TPT Series table with extended top allows the ADA Compliance Box to fit comfortably underneath. *See Page 45.*



PT Series tables provide a secure, permanent location and is wheelchair accessible at both ends by design. *See Page 45.*

NOTE: There is no such thing as an "ADA Approved" or "ADA Certified" picnic table. There is no approving or certifying organization.

Compliance with the ADA quidelines is left to the manufacturer and the customer.

Pilot Rock picnic tables are designed to comply with the Final Guidelines for Federal Outdoor Recreation Sites (effective 11/25/2013). Refer to Chapter 3, section 306 Knee and Toe Clearances. For table placement and spacing you should also consult: Chapter 2 Scoping Requirements (sections F201.4, F244 and F245); Chapter 9 Built In Elements (section 902); and Chapter 10 Recreation Facilities (sections 1011 and 1019). For more information on the accessibility guidelines contact: Bill Botten, Office of Transportation and Information Services, Architectural and Transportation Barriers Compliance Board, 1331 F St. NW Suite 1000, Washington, DC 20004-1111. Ph: 202-272-0014. Web: www.access-board.gov.

Pilot Rock PICNIC TABLES



SNOW LOAD and EXTREME LOAD RATED TABLES



These Pilot Rock brand picnic tables have been designed and independently tested ...by an independent lab and a state university... to withstand high elevation snow loads and other extreme conditions. To achieve the following ratings, these steel frame tables must be equipped with our V-Type expanded steel or H-Type perforated steel top and seat structures. Standard and accessible tables are available. Remember ... the rating is Per Square Foot, not per table! When the snow melts these tables will be ready to use again.

Maybe it doesn't snow where you are? Just think how well these tables will hold up to public exposure in your parks!

500 LBS. PER SQUARE FOOT



Model WAT-8 A-Frame Table 8 ft. long and wheelchair accessible at both ends. The table structure uses **Recycled Plastic** leg posts and top/seat planks and incorporates steel braces for support. This table was tested to hold over 500 lbs. per sq. ft. load without failure. (see Page 37)

948 LBS. PER SQUARE FOOT



Models XT-/E and XTH-/E Extended End Wheelchair Accessible Tables with 8 ft. top and 6 ft. seats using V-Type expanded steel or H-Type perforated steel top/seats. The 2 ft. extension on the table top was tested to withstand over 948 lbs. per sq. ft. without failure. (see Page 32)

1420 LBS. PER SQUARE FOOT



Models WXT and WXTH Universal Access Tables in 6 ft. or 8 ft. lengths, with V-Type expanded steel or H-Type perforated steel top/seats. (see Pages 28-29)



Model WPTS Universal Access Table in 6 ft. or 8 ft. lengths, with V-Type expanded steel or H-Type perforated steel top/seats. (see Page 29)

Model XT Standard Tables in 6, 8, or 10 ft. lengths, with V-Type expanded steel or H-Type perforated steel top/seats. (see Page 31)



Model APT Multi-Pedestal Tables and APTX Utility Tables in 6 ft. or 8 ft. lengths, with V-Type expanded steel or H-Type perforated steel top/seats. (see Page 44, 83)



Kid's Tables —

Rectangular, Square and Round

- Tables are proportionally scaled to fit children up to 10 11 yrs old.
- Seats are 12" high. Top is 22" high.
- Frame fabrication and top/seat construction are identical to the standard size tables. All welded construction with appropriate bracing and supports. Children can be hard on furniture. You need outdoor picnic tables built to take it.
- See pages 50-53 material and finish choices



Model UTK – Rectangular Table

- UTK Tables are built to same specifications as UT Tables. See Page 30.
- Standard frame finish: Hot dip galvanized after fabrication.
- Optional frame finish: Powder coating.
- Top/seat materials:

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	4, 6, 8
Aluminum	4, 6, 8
2x10 100% Recycled Plastic	4, 6, 8
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8
Thermo-plastic coated formed Steel Channel	6, 8



Model UTK/G-4UP galvanized frames, 4 ft., untreated pine lumber.

Model SQTK — Square Table

- SQTK Tables provide a 48" square top and 4 bench seats. Built to same specifications as SQT-4 Tables. See Page 40.
- Standard frame finish: Hot dip galvanized after fabrication.
- · Optional frame finish: Powder coating.
- Top/seat materials:

Available Materials. See Pages 50-53	Size (inches)
2x10 Untreated or Pressure Treated Pine	48
Aluminum	48
2x10 100% Recycled Plastic	48
Thermo-plastic coated, Expanded Steel, or Perforated Steel	48



Model SQTK/CW-4PY brown powder coated frames, 4 ft., yellow recycled plastic planks.

Model T104K — Round Table

- T104K Tables provide a 48" round top and 4 curved seats. Built to same specifications as T100 Tables. See Page 42.
- Standard frame finish: Hot dip galvanized after fabrication.
- Optional frame finish: Powder coating.
- Top/seat materials:

Available Materials. See Pages 50-53	Size (inches)
100% Recycled Plastic	48
Thermo-plastic coated, Expanded Steel, or Perforated Steel	48



Model T104K/CY-4DR yellow powder coated frames, 4 ft., red thermo-plastic coated expanded steel top and seats.

Pilot Rock PICNIC TABLES

A-Frame Table — AFT Series **All Wood Traditional A-Frame Table**



• Model AFT is your traditional ALL WOOD A-frame style picnic table. All components are pressure treated #1 southern yellow pine (nom. dimensions):

- 4" x 6" leg posts
- \bullet 2" x 4" and 2" x 6" connecting and support braces
- 2" x 10" top/seat planks
- Model AFT frames are assembled using 3/8" dia. carriage bolts for superior clamping force to keep the table solid. Top/seat planks are secured with stainless steel screws. All lumber is precision drilled to facilitate assembly. All fasteners are included.
- Dimensions: 6 ft. or 8 ft. long, 30-1/4" table height, 17-3/4" seat height (nominal).
- The 8 ft. long table is wheelchair accessible and provides ADA compliant wheelchair access points at both ends. See Page 33.



Shop Online at pilotrock.com

A-frame table, treated pine lumber, wheelchair accessible at both ends.

> Join our e-newsletter for the latest information and promotions . . . go to pilotrock.com

A-Frame Table — AFT Series **All Plastic Traditional A-Frame Table**



Model AFT/B-6PC all plastic, 6 ft. long, black frames, cedar colored top/seat planks.



- 4" x 6" leg posts
- 2" x 4" and 2" x 6" connecting and support braces
- 2" x 10" top/seat planks
- Standard Colors: Brown or black leg posts and braces, and Cedar color top/seat planks. Other plank colors are available. See Page 53.



table, treated pine lumber.

Model AFT/W-8PW all plastic, 8 ft. long, A-frame table with brown recycled plastic seats, top, and frames



Model AFT-6TP all wood, 6 ft., A-frame

- Model AFT frames are assembled using 3/8" dia. carriage bolts for superior clamping force to keep the table solid. Top/seat planks are secured with stainless steel screws. All plastic lumber is precision drilled to facilitate assembly. All fasteners are included.
- Dimensions: 6 ft. or 8 ft. long, 30-1/4" table height, 17-3/4" seat height (nominal).
- The 8 ft. long table is wheelchair accessible and provides ADA compliant wheelchair access points at both ends. See Page 33.

PIGNICALIST Pilot Rock

A-Frame Table — AT Series

A traditional table modified to withstand public and commercial use

- Model AT Tables incorporate pre-galvanized steel braces and cross supports for a stronger A-frame design.
- · Frames are supported by diagonal braces of 1-5/16" OD galvanized steel pipe attached to a steel center channel under the table top. All 3/8" dia. galvanized carriage bolts (not lag screws) are provided for assembly.
- Model AT Tables use 4" x 6" (nom.) leg posts, and 2" x 10" (nom.) top/seat planks. Choose either pressure treated #1 southern yellow pine, or 100% recycled plastic. See Pages 51 & 53.
- 6 ft. or 8 ft. long (2 frames) using lumber or recycled plastic; 12 ft. long (3 frames) using treated pine only.
- Wheelchair Accessible: 6 ft. long seats with 8 ft. long top extended 1 ft. at each end provides ADA compliant wheelchair access at both ends. See Page 33.
- Snow Load Rated Table: Model WAT-8, available only with recycled plastic, includes additional steel braces under the seats and top to provide a Snow Load Rating of 500 lbs. per sq. foot. Model WAT-8 is also wheelchair accessible at both ends providing ADA compliant knee and toe clearances. See Page 33.
- Optional: Subframe support structure on Model AT and WAT-8 tables can be fabricated from steel and powder coated in your choice of colors. See Page 50 for colors.





Enjoy the Outdoors — with a complete set of site furnishings.











Pilot Rock PICNIC MAINTEN

"Caterpillar" Table — T600 Series

- The elevated, open span frame design of our Model T600 Park Table creates a clear area under and around the table for easier clean up. Surface mount (bolt down) installation (includes a set of anchors. See Page 121.)
- All tables are ADA compliant for wheelchair access at both ends.
- The frame legs are 2-3/8" OD (2.375" OD, 11 ga. wall, 2" ID nom.) steel pipe formed and welded into single units. Seat support brackets are 10 ga. welded steel plate. Standard finish: Hot dip galvanized.
- Optional: Powder coat frame finish. See Page 50 for colors.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10
Aluminum	6, 8, 10
Thermo-plastic coated, D-Type Expanded Steel, or R-Type Perforated Steel	6, 8, 10
Formed Steel Channel	6, 8




Model T604/G-8TP table, 4 walk-in seats, 8 ft., treated pine.

- Model T600 Table configurations include:
 - Model T602-6: 6 ft., 2 full length seats, step-over entry.
 - Model T602-8: 8 ft., 2 full length seats, step over entry.
 - Model T603-8: 8 ft., 1 full length seat, and two short seats, walk in entry.
 - Model T604-8: 8 ft., 4 short seats, walk in entry.
 - Model T602-10: 10 ft., 2 full length seats, step over entry.
 - Model T604-10: 10 ft., 1 full length seat, and three short seats, walk in entry.
 - Model T606-10: 10 ft., 6 short seats, walk in entry.

• Optional: 2-part aluminum cover caps for T600 table frame posts. See page 27.



Model T603/G-8DN surface mount table, one long seat, two short seats (total 3 seats), hot dip galvanized frame, 8 ft., thermo-plastic coated expanded steel in green color.



Lighter Duty Tables — BT Series

- Model BT Tables combine pre-galvanized steel tube frames with the economy of a bolt together design.
- Model BT Tables feature our nontip, nontrip, walk through design. Won't tip even if all persons sit on one side. Easy walk through access. "Skid" design permits movement without damage to turf.
- Frame features: Pre-galvanized steel top/seat mounting angles, two diagonal braces of 1-5/16" OD pre-galvanized steel tube, 3/8" dia. galvanized carriage bolt fasteners.
- Tables offer 30" nom. table height; 18" nom. seat height.
- BT Table Frames come in two sizes:
 - Model BTUG Series is fabricated using 1-5/8" OD x 12 ga. steel tube end frames. Model BTUG tables can be 4, 6 or 8 ft. long.
- Model BTXG Series is fabricated using 2-3/8" OD x 12 ga. steel tube end frames. Model BTXG tables can be 6 or 8 ft. long.
- Top/seat materials available: 2" x 10" untreated or pressure treated #1 southern yellow pine or aluminum (see Pages 51 & 53.)



Model BTUG-4UP 4 ft., untreated pine lumber.





Recycled Plastic Tables — RT Series

- **Model RT** Tables feature components molded from 100% recycled plastic.
 - Frames are 3" thick single-piece, available in Brown, Black or Green colors. (Other colors may be available as a special order)
 - 2" x 10" (nom.) top/seat planks are available in many colors. See Page 53.
- Top/seat mounting angles are formed from pre-galvanized steel. The table structure is reinforced with diagonal braces of 1-5/16" OD pre-galvanized steel tube. These steel components add strength. All 3/8" dia. galvanized carriage bolt fasteners are included.
- RT Tables available in 6 and 8 ft. lengths.
- Wheelchair accessible at one end: 6 ft. long seats and 8 ft. long top extended 2 ft. at one end providing the ADA recommended wheelchair clearances. See Page 33.
- Model RT Tables feature our nontip, nontrip, walk through design. Won't tip even if all persons sit on one side. Easy walk through access. "Skid" design permits easier movement. Tables offer 30" nom. table height; 17-1/2" nom. seat height.



(Above) **Model RT/Y-8U,** 8 ft., custom yellow frames, blue top/seat planks.

(Right) **Model RT/N-6C/E** green frames, cedar colored top/seat planks, 6 ft. seats, 8 ft. top extended at one end to provide wheelchair access.



(Left) **Model RT/W-6C** 6 ft., brown frames, cedar colored top/seat planks.

Recycled Plastic Tables — ART Series

- Model ART Tables feature components molded from 100% recycled plastic.
 - Frames are 3" thick single-piece with classic arch design, can be Black or Brown.
 - 2" x 6" (nom.) top/seat planks are available in many colors. See Page 53.
- Table design uses three step-over style frames for support so no additional steel braces are necessary. Includes stainless steel screws for assembly.
- Model ART is available in 2 standard sizes: 6 ft. and 8 ft. long.
- Wheelchair accessible at both ends: Model ART is also offered in an ADA compliant design with 6 ft. seats and 8 ft. top extended 1 ft. at each end to provide two wheelchair access points. This configuration provides the ADA recommended under table clearances. See Page 33. Plastic end caps are blue on table top.
- Model ART nominal dimensions: 17-1/2" seat height, 30-1/2" table top height. Non tip step over table frames, table won't tip even if all persons sit on one side.





Model ART/W-6N/E1 brown frames, green top and seat planks, 6 ft. seats, 8 ft. top extended at both ends to provide wheelchair access at both ends.

Portable Square Tables — **SQT Series**

- Model SQT Tables offer portability plus a square seating pattern that fully utilizes the table top: an ideal game or craft table.
- · Model SQT Tables come in two sizes:

SQT-3 has 38" sq. top

SQT-4 has 48" sq. top.

Each table includes 4 flat bench seats. The frame design includes our nontip, nontrip, walk-through features. Tables offer 30" nom. table height; 18" nom. seat height.

- Corner frames are fabricated from 1-1/2" OD x 12 ga." wall structural steel pipe; 1-3/4" x 1-3/4" x 10 ga." thick steel top/seat mounting angles; 1-5/16" OD cross braces.
- Standard frame finish: Hot dip galvanized after fabrication. Optional frame finish: Powder coating in choice of colors. See Page 50.

Available Materials. See Pages 50-53	Size (inches)
2x10 Untreated or Pressure Treated Pine	38, 48
Aluminum	38, 48
2x10 100% Recycled Plastic	38, 48
Thermo-plastic coated, Expanded Steel, or Perforated Steel	48

- Wheelchair Accessible: Model SQT-4 is available with one seat structure eliminated and the top extended to create a wheelchair space that meets ADA guidelines. This table variation is available with lumber or 100% recycled plastic planks, thermo-plastic coated expanded or perforated steel.
- Optional: Umbrella hole/cup/collar to accommodate your choice of umbrellas with 1-1/2" diameter poles. See Page 49. (This hardware is included on thermo-plastic coated tables.)
- Optional: Backrest attachments for the seats, available in all the same materials to match the seats/tops. See Page 48.
- Optional: Game Board Table Top (see below) available on SQT-4 tables with thermo-plastic coated expanded or perforated steel. The Game Board insert is 14 ga. steel powder coated black. After the vinyl game decal is applied the insert is sealed with a clear coat finish. The standard game decal is a red/black checkerboard.





Model SQT/G-3PC galvanized frames, 38" sq. top, 100% recycled plastic in cedar color.



(Above) Model SQT/G-4VN galvanized frames, 48" sq. top, green thermo-plastic coated expanded steel top and seats, optional umbrella.

Optional: 45" long contour bench seats (see below) are available on SQT-4 tables with thermo-plastic coated expanded or perforated steel. Replace the standard flat seat with 4 contour benches. (Model SQTB-4).





Model SQT3/G-4PA/E galvanized frames, 48" sq. top, 100% recycled plastic in gray color, one seat eliminated and top extended to provide wheelchair access.

Square Pedestal Table — PQT Series

- **Model PQT** Pedestal Tables provide a secure, permanent location with the advantages of the square shape.
- Model PQT Tables come in two sizes:

PQT-3 has 38" sq. top

PQT-4 has 48" sq. top.

Each table includes 4 flat bench seats. 32" table height, 20" seat height (nominal dimensions).

- Table is supported by one central, massive 5-3/8" sq. steel post. Embedded installation is standard. Each seat is supported by a 3-1/2" diameter steel tube, designed to resist lateral torsion and deflection. Single, central support post simplifies maintenance around table.
- Stationary installation prevents theft. Assembly points all fasteners to inside of central post so carriage bolt nuts are not exposed. Installation of top prevents access to inside of post.
- Standard frame finish: Hot dip galvanized after fabrication. Optional frame finish: Powder coating in choice of colors. *See Page 50.*

Available Materials. See Pages 50-53	Size (inches)
2x10 Untreated or Pressure Treated Pine	38, 48
Aluminum	38, 48
2x10 100% Recycled Plastic	38, 48
Thermo-plastic coated, Expanded Steel, or Perforated Steel	48

- Wheelchair Accessible: Model PQT-4 with 48" sq. top is easily adapted to provide wheelchair access. By removing one or more arm/seat structures the side of the table becomes accessible.
- **Optional:** Frame post provided with 3/8" x 16" sq. steel bolt down base plate (anchor bolts not included). *See Page 121.*
- Optional: Umbrella hole/cup/collar to accommodate your choice of umbrellas with 1-1/2" diameter poles. See Page 49. (This hardware is included on thermo-plastic coated tables.)
- **Optional:** Game Board Table Top (see below) available on PQT-4 tables with thermo-plastic coated expanded or perforated steel. The Game Board insert is 14 ga. steel powder coated black. After the vinyl game decal is applied the insert is sealed with a clear coat finish. The standard game decal is a red/black checkerboard.





Model PQT/P/CB-3UP showing optional bolt down base plate installation, black powder coat frames, 38" top, untreated pine lumber.






Model PQT/G-4AL embedded post, galvanized frames, 48" top, clear anodized aluminum.

 Optional: 45" long contour bench seating (see below) is available on PQT-4 tables with thermo-plastic coated expanded or perforated steel. Replace the standard flat seat with 4 contour benches (Model PQTB-4).





Model PQT/G-4HR showing standard embedded post installation, galvanized frames, 48" top, red thermo-plastic coated perforated steel.

Two
Installation
Methods

Pilot Rock PICNIC TABLES



Model T104/CB-4RR portable table, black powder coated frames, 48" dia. round top, four curved seats, perforated steel coated with red thermo-plastic.

T200 Series Portable Table

- Four seats with one frame support under each seat. A choice of 16" dia. (nom.) round seats to accommodate four people, or 10" x 40" (nom.) curved seats to accommodate up to eight people, or four chairs. See Page 43.
- 2-3/8" dia. steel pipe frame members bolt to a center hub.









Model T304/G-4DU stationary table (embedded post), galvanized frames, 48" dia. round top, 4 curved seats, expanded steel coated with blue thermo-plastic.

Round Tables

- A perfect fit for... malls, patios, pools, decks, restaurants, rec centers, common areas, schools, golf courses, hotels, streetscapes, . . . any casual place where people gather.
- 48" diameter (nom.) round top with four seats.
- Frame finish: Hot dip galvanized or powder coated. See Page 50.
- · Top and seat material choices:
 - Thermo-plastic coated D-type expanded steel
- Thermo-plastic coated R-type perforated steel
- Thermo-plastic coated cut steel plate.
- 100% recycled plastic top and seats. See Page 53 for colors.
- Umbrella hole in top and receiving cup on frame. Umbrella is optional. See Page 49.

■ T100 Series Portable Table

- Four flat curved seats, 10" x 40" (nom.), enough seating for up to eight people, with two frame legs supporting each seat.
- 1-1/2" dia. welded steel pipe frame.
- Optional: Four contour bench seats. See Page 43.







Model T214/G-4PC portable table, galvanized frames, 48" dia. round top, 4 round seats, with 100% recycled plastic in cedar color.

T300 Series Embedded Post **T400 Series Surface Mount**

- Central support post is 5-3/8" sq. steel tube; seat support arms are 3-1/2" OD steel tube.
- Four 10" x 40" (nom.) flat curved seats provide seating for up to eight people, or four contour bench seats. See Page 43.
- Two choices of permanent theft-proof installation: Surface mount base plate or embedded post in concrete footing.
- · Make the table wheelchair accessible by omitting one or more seats.







PICNE ABLE Pilot Rock



■ Game Board Table Top

- Play your favorite game on this checkerboard style Game Board Table Top.
- Game Board is available on round tables with thermo-plastic coated expanded or perforated steel tops.
- Game Board insert is fabricated from 14 ga. steel, powder coated black. Includes automotive quality clear coat finish over red/black vinyl game decal and steel insert.

Model T204/G-4DW/GT portable table, hot dip galvanized frames, 48" dia. round top, four flat curved seats, expanded steel with brown thermo-plastic coating, optional game board top.

Chair Seat Available on T200 Series

- Replace the flat curved or round seats on the T200 round table with individual chairs.
- The 16" wide chair is fabricated using 3/4-#9 expanded steel or 14 ga. perforated steel, with 1/4" thick side plates and 10 ga. and 7 ga. steel reinforcing with thermo-plastic coating to match the table top.



Model T224/G-4DW

portable table, galvanized frames, 48" diameter round top, 4 chair seats, expanded steel coated with brown thermo-plastic.

Model T134/CB-4DA, portable table,

black powder coat frames, 48" diameter round top, 4 contour expanded steel bench seats, coated with grav thermo-plastic.



Bench Seat on T100, T300 and T400 Series

- Replace the flat curved seats on the T100, T300 or T400 round tables with contoured bench seats with room for two.
- The 45" wide seat is fabricated using 3/4-#9 expanded steel or 14 ga. perforated steel, with 1/4" thick side plates and 10 ga. and 7 ga. steel reinforcing.
- Each bench will be thermo-plastic coated to match the table top. See Page 52 for color choices.

Cut Steel Plate Top and Seats

- · Available on all T Series Round Tables.
- 10 ga. cut steel plate makes an attractive top/seat design and a durable
- Thermo-plastic coat finish on top/seats. See Page 51 for color choices.
- Curved flat seats available on all models. Round seat available on T200 only.
- Wheelchair accessible tables are available using the T300 or T400 frames.



Model T104/G-4PC portable table, galvanized frames, 48" dia. round top, four curved flat seats, 100% recycled plastic

in cedar color.



100% Recycled Plastic Top and Seats

- Curved flat seats: 10" x 40" (nom.) on T100, T300 and T400
- Round seats: 16" dia. (nom.) on T200.
- 100% recycled plastic components, 2" thick. See Page 53 for colors.
- 2-piece top for easier handling and assembly. Includes umbrella hole.
- Wheelchair accessible tables are available using T300 or T400 frames.

coated blue.

Pilot Rock PICNIC TABLES

Multi-Pedestal Table — **APT Series**

- Model APT Multi-Pedestal Rectangular Tables provide a secure, permanent location. Stationary installation prevents theft. Table can be 6 or 8 ft. long with two full-length bench seats. 30" table height, 18" seat height (nominal dimensions).
- Provides a permanent location using two heavy pedestal posts of 3" x 6" x 1/8" wall rectangular steel tubing to support the table top and each seat. Exposed ends of frame posts are sealed with welded on end caps.
- Standard frame finish: Hot dip galvanized after fabrication. Optional frame finish: Powder coating available in choice of colors. See Page 50.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8
Aluminum	6, 8
2x10 or 3x4 100% Recycled Plastic	6, 8
Thermo-plastic coated, Expanded Steel, or Perforated Steel	6, 8
Formed Steel Channel	6, 8

- Wheelchair Accessible: Table may be provided with 8 ft. top, extending 1 ft. at each end beyond 6 ft. long seats to provide two wheelchair access points in accordance with ADA guidelines. See Page 33.
- Optional: All frame posts provided with 1/4" x 8" sq. steel bolt down base plate (anchor bolts not included). See Page 121.





Model APT/P/CN-6PA34, surface mount installation, green powder coated frames, 6 ft. long, 3" x 4" gray recycled plastic top and seats.



• APT multi-pedestal picnic tables are available with 3 x 4" (nom.) top and seat timbers in 100% recycled plastic. See Page 53 for colors. The outside timbers on both seats and the top have a rounded profile. There is no square edge.

optional bolt down base plate installation, galvanized frames,

8 ft. long, thermo-plastic coated

expanded steel in brown.

Model APT/CB-6PC34/E1 embedded post installation, black powder coated frames, 3" x 4" cedar colored recycled plastic 8 ft. top and 6 ft. seats, wheelchair accessible on both ends.



Pair trash receptacles with picnic tables to help clean up the picnic mess.

SNOW LOAD RATED OPTION

When equipped with V-Type expanded steel or H-Type perforated steel top/seats. See Page 34.

Twin Pedestal Table — TPT Series

- **Model TPT** Twin Pedestal Tables provide a secure, permanent location, with twin steel support posts. The table can be 6 ft. or 8 ft. long (two pedestals) and 10 ft. long (three pedestals). Each table has two full-length bench seats. 31 inch table height, 18 inch seat height (nominal dimensions).
- Support posts are 4" x 1/8" wall sq. steel tube. Seat support arms are 2-1/2" x 3/16" wall sq. steel tube. Step over entry.
- Embedded post installation is standard.
- Frame finish: Hot dip galvanized or powder coated. See Page 50.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10
Aluminum	6, 8, 10
2x10 100% Recycled Plastic	6, 8
Thermo-plastic coated, D-Type Expanded Steel, or R-Type Perforated Steel	6, 8, 10
Formed Steel Channel	6, 8

- Wheelchair Accessible: 8 ft. top extends 2 ft. beyond 6 ft. seats at one end provides ADA compliant wheelchair access. See Page 33.
- **Optional:** Twin frame posts provided with 3/8" x 10" sq. steel bolt down base plate (anchor bolts not included) for surface installation. *See Page 121.*




Single Pedestal Table — PT Series

- **Model PT** Pedestal Rectangular Tables provide a secure, permanent location. Table is 6 ft. long with two full-length bench seats. 32" table height, 21" seat height (nominal dimensions).
- Supported by one central, massive 5-3/8" sq. steel post. Embedded installation is standard. Seat support arms are 3-1/2" dia. steel tube, designed to resist lateral torsion and deflection. Single, central support post simplifies maintenance around table.
- Design points all fasteners to inside of central post so carriage bolt nuts are not exposed. Installation of top prevents access to inside of post.
- Frame finish: Hot dip galvanized or powder coated. See Page 50.

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6
Aluminum	6
2x10 100% Recycled Plastic	6
Thermo-plastic coated, D-Type Expanded Steel, or R-Type Perforated Steel	6
Formed Steel Channel	6

- PT Tables are wheelchair accessible at both ends by design.
- **Optional:** Frame post provided with 3/8" x 16" sq. steel bolt down base plate (anchor bolts not included). *See Page 121.*





See Page 27.





Square Frame Picnic Tables and Utility Tables

- T700 Series tables and utility tables offer a clean cut square end frame design with inlaid top and seat planks.
- Surface mount installation only. Anchor bolts not included. See Page 121.
- All steel, welded component construction. End frames are 2" x 2" x 11 ga. square steel tube. Top/seat framework is 1" x 2" x 14 ga. rectangular steel tube, with formed steel channel reinforcements. All open ends are welded closed with steel end caps.
- All steel frame components have a powder coat finish. See Page 50.
- Top/seat inlay materials 2" x 4" (nom.): 100% recycled plastic in choice of colors. All inlaid planks are installed at the factory. See Page 53.
- Assembly of end frames to top/seat components is required.
- See matching benches on Page 5, matching trash receptacle on Page 62.

- Wheelchair accessible: All rectangular tables provide ADA compliant wheelchair access at both ends. A square table with three seats is also ADA compliant on one side.
- Available T700 Series Table configurations include:
 - Model T700-6: rectangular utility table, no seats, 6 ft.
 - Model T700-8: rectangular utility table, no seats, 8 ft.
 - Model T702-6: rectangular picnic table, 2 bench seats, 6 ft., wheelchair accessible.
 - Model T702-8: rectangular picnic table, 2 bench seats, 8 ft. wheelchair accessible.
 - Model TQ700-4: square utility table, no seats, 4 ft.
 - Model TQ703-4: square picnic table, 3 bench seats, 4 ft., wheelchair accessible.
 - Model TQ704-4: square picnic table, 4 bench seats, 4 ft.



Model T702/CB-8PA Picnic Table, black powder coat frames, 8 ft. long, 2" x 4" 100% recycled plastic planks in gray color. ADA compliant wheelchair access at both ends of table.



Model TQ700/CN-4PC Square Utility Table, green powder coat frames, 4 ft. sq. top, 2" x 4" 100% recycled plastic planks in cedar color.



Model T700/CB-8PA Utility Table, black powder coat frames, 8 ft. long, 2" x 4" 100% recycled plastic planks in gray color.



Model TQ704/CE-4PU Square Picnic Table, burgundy powder coat frames, 4 ft. sq. top, 2" x 4" 100% recycled plastic planks in blue color.

Table Model	Style	Length	Bench Seats	ADA Compliant Access	Top/Seat Inlay Material	Frame Finish
T700-6	Utility Table	6' Rectangular	None	Yes - All Sides		
T700-8	Utility Table	8' Rectangular	None	Yes - All Sides		Powder coat black
T702-6	Picnic Table	6' Rectangular	(2) 6'	Yes - Both Ends	100% Recycled Plastic 2" x 4" (nom.) planks in cedar color (PC) is standard. Other colors available. See Page 53.	finish (CB) is
T702-8	Picnic Table	8' Rectangular	(2) 8'	Yes - Both Ends		standard. Other colors
TQ700-4	Utility Table	4' Square	None	Yes - Any Side		available.
TQ703-4	Picnic Table	4' Square	(3) 4'	Yes - One Side	3.50 1 3.50 1 3.50	See Page 50.
TQ704-4	Picnic Table	4' Square	(4) 4'	No		

Food Court Table

- The open span frame design of Model FCT Food Court Table creates a clear area under and around the table for easy clean up.
- Surface mount (bolt down) installation provides a secure location.
 Screw anchors for concrete surfaces are included. See Page 121.
- **Model FCT** is 4 ft. long and will comfortably seat four adults. The wide end openings allow strollers and wheelchairs to approach.
- The small footprint of this table (48 inches long x 58 inches wide) gives you placement and arrangement flexibility.



Model FCT/CB-4SP/CU Food Court Table, black powder coated frames, 4 ft. long, surface mount, steel plate top and seats with blue textured powder coat paint finish. Shown with optional CC-1/CB frame foot cover caps.



Model FCT/G-4FG/YELLOW Food Court Table, galvanized frames, 4 ft. long, surface mount, fiberglass top and seats in yellow color.

- All welded frame fabrication includes: 2-3/8" OD steel pipe legs (2.375 in. OD, 11 ga. wall), with top and seat support/attachment brackets die formed using 10 ga. and 1/4" steel plate. The two frame structures bolt together under the table top.
- Standard frame finish: hot dip galvanized after fabrication. Optional frame finish: powder coat in choice of colors. See Page 50.
- Top/seat material choices: thermoplastic coated R-Type perforated steel (page 52), solid steel plate with semi-gloss textured powder coat finish (page 50), or fiberglass available in Red, Green, Blue or Yellow color options.
- Fiberglass table top features a 1-3/4" hole for optional Umbrella. See Page 49.

 Optional: 2-part aluminum cover caps for FCT table frame posts. See page 27.

Condiment Serving Table

• **Model CST** is designed as a concession area table to serve up condiments, utensils and supplies. This allows your concession stand customers to step away from the serving window to prepare their purchase to their own tastes.

• Support posts are 2-3/8" OD steel pipe with a welded on base plate of 1/4 in. x 8 in. steel plate with four 3/4 in. dia. holes.

- **Standard:** Surface mount/bolt down installation (anchor bolts not included).
- Standard frame finish: hot dip galvanized after fabrication.
- **Optional frame finish:** powder coating in choice of colors. *See Page 50.*
- Table top is 2-1/2 in. x 12 in. wide (nom.) 12 ga. perforated steel with integrated edge banding and 10 ga. internal mounting angles. Top is thermoplastic coated in choice of colors. *See Page 52*.
- Height: 46 inches from ground surface to table top.
- Length: 4, 6, 8 or 10 feet long (10 ft. table has three posts).
- **Optional:** Surface mount anchor kit #ANC5-4. Use one kit per post. *See Page 121.*
- **Optional:** Longer posts (no base plate) for embedded installation into concrete footings.



Model CST/P/CB-6HY12 Condiment Serving Table, black powder coated frames with bolt-down base plate option, 6 ft. long, thermo-coated perforated steel top in yellow.

Pilot Rock PICNIC TABLES

Accessories For Tables

Heat Shield for Picnic Table Tops


- Model HS-TB/G Heat Shield protects your picnic table top from the damage caused by the heat off small gas grills, charcoal grills, skillets, or Dutch Ovens that picnickers often bring with them.
- Protects wood, plastic and coated steel table tops from heat damage caused by hot cooking utensils.
- Designed for easy installation on most brands of tables, most styles of tops. Includes fastener package for 2" x 10" lumber or plastic, and expanded or perforated steel tops.
- Expanded steel surface with steel frame. No assembly required. Approximately 12" deep x 25-1/2" wide x 3-1/2" tall. Hot dip galvanized finish for maximum protection.



Table Top End Cap — **Reduces Warping**

- Install picnic table top end caps to prevent warping on new lumber, or to correct minor warpage on old lumber. Keep all top planks in alignment so your table remains usable.
- Use these formed pregalvanized steel channels to align the planks at both ends of your picnic table top. Especially useful on tables with lumber tops extended to provide wheelchair access.
- Table Alignment Kit includes (2) formed 28" long pregalvanized steel channels and wood screws (install from bottom up).
- Order Part Number TAK-21G for 2" nominal dim. lumber (2" x 4", 2" x 6", 2" x 8", 2" x 10").
- Order Part Number TAK-31G for 3" x 10" nom. dim. lumber.



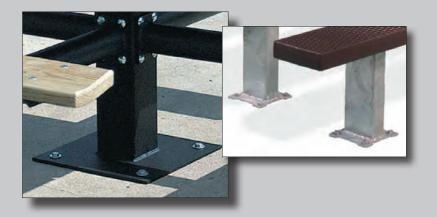

Surface Mount Base Plate

- Optional bolt down base plate installations are available on Model PQT Square Tables, Model PT, APT, and TPT Rectangular Tables, and T400 Round Tables.
- The standard post is replaced by a shortened post with a welded on steel plate to be bolted to an existing surface. Anchor bolts are not included with this option. See Page 121.
- Model PQT, PT, and T400 Tables are equipped with a 3/8" x 15-3/4" square steel base plate. Model APT Table posts have a 1/4" x 8" sq. steel base plate. Model TPT posts include a 3/8" x 10" square plate. All have (4) 25/32" dia. anchor holes.



- (Above) Backrest on 6 ft. rectangular table. (This option is not available on UTK and SQTK tables.)
- (Left) Backrest on 48" square table.

- · Optional Backrests are available on 6 and 8 ft. long UT, XT Rectangular Tables and SQT Series Square Tables. This option can be added to new or existing tables.
- Die-formed steel backrest bracket is sandwiched between seat plank and table frame for a secure, bolted installation.
- Backrest planks are available in lumber on rectangular tables; all materials on SQT tables.

Accessories For Tables

Shade for Square and Round Picnic Tables



Model UM-4 Premium Acrylic Fabric Umbrella

- 7-1/2 ft. diameter, garden style.
- Eight 5.0 mm zinc plated steel ribs & stretchers. Galvanized steel bell cap. Non-twisting end tips.
- 1-1/2" OD silver anodized steel pole.
- Crank lift with steel cable, and EZ-Latch spring mechanism. Stainless steel double joints and rivets make opening and closing easy. No draft vent.
- 3-position tilt, heavy gauge mechanism, nylon runner.
- Premium acrylic fabric, 9 oz. marine grade, solution dyed, UV resistance. Available in solid and alternating colors:
- Solid colors: pacific blue, forest green, sunflower yellow, logo red.
- Alternating colors: pacific blue/white, forest green/white, logo red/white, and beach ball (red, yellow, blue, bright green).



Model UM-5 Economy Vinyl Umbrella

- 7-1/2 ft. diameter, garden style.
- Eight chrome plated steel ribs. Steel bell cap. Non-twisting end tips.
- 1-1/2" OD silver anodized steel pole.
- Crank lift with steel cable, and EZ-Latch spring mechanism. Stainless steel double joints and rivets make opening and closing easy. No draft vent.
- 3-position, heavy gauge tilt mechanism, nylon runner.
- Heavy gauge 13 oz. vinyl material available in solid or alternating colors:
- Solid colors: white, forest green, pacific blue, red, navy, kelly green, yellow.
- Alternating colors: forest green/white, kelly green/white, pacific blue/white, red/white, navy/white, yellow/white.




Model UM-11 Premium Acrylic Fabric Market Style Umbrella

- 9 ft. diameter, market style.
- Eight 1/2" thick Fiberglass ribs. Stainless steel grommets and hardware throughout. Draft vent.
- 1-1/2" Fiberglass pole, two sections. Wood grain finish.
- · Commercial pulley system. No tilt.
- Premium acrylic fabric, 9 oz. marine grade, solution dyed, UV resistance. Available in solid colors only.
- Solid colors: pacific blue, forest green, navy blue, toast, logo red and white. Other solid colors and alternating colors may be available. Please inquire.

Powder Coat Finish

Selected Pilot Rock bench and table components (steel and aluminum), lantern holders, trash receptacle holders, and bike racks are available with baked on lead-free TGIC polyester powder coat finish that is applied in a multi-step process of material preparation and finish application. This process includes: detailed chemical cleaning; application of a corrosion inhibiting phosphate-free high pressure, high temperature bath; rinse; seal rinse; high temperature dry time; electrostatic application of the powder coat paint; chemical bonding to metal substrate in 430 degree industrial oven. The tough 3 mil thick coating offers a superior finish to liquid paints.

Optional: Upon request we can also powder coat over our durable hot dip galzanized finish (on products where it is available).

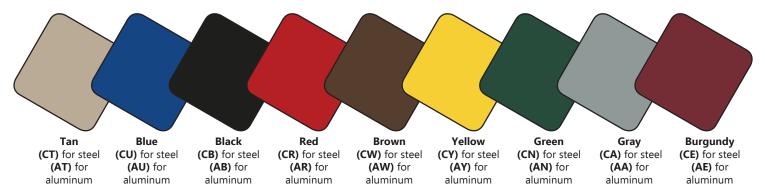


Model No. Example for Powder Coat Finish products: XT/ ♦-6UP Replace (♦) with letters indicating color choice listed under sample.

NOTE: Custom colors may be available when ordered in sufficient quantity and additional lead times.

Textured Powder Coat Finish

We use a semi-gloss textured powder coat paint finish on our BPRT bear resistant trash/recycling receptacles, our BPFL bear resistant food storage lockers, and on the solid steel plate top/seats for the FCT-4 food court table. The application process is the same as described above.

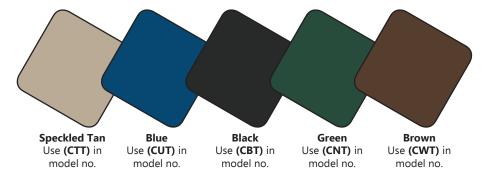

Model No. Example for Powder Coat Finish products: XT/ ♦-6UP Replace (♦) with letters indicating color choice listed under sample. NOTE: Custom colors may be available when ordered in sufficient quantity and additional lead times.

Heat Resistant Black Enamel Paint

Pilot Rock grills and campfire rings are finished with a high heat resistant, non-toxic, matte (low gloss) black enamel paint. This silicone-based paint is lead and chrome free and formulated especially for Pilot Rock. It is capable of enduring temperatures exceeding 750 degrees.

Hot Dip Galvanized Finish

Selected Pilot Rock bench and table frame components, lantern holders, trash receptacle holder components, bike racks and two grills are available with a hot-dip galvanized finish that is applied after fabrication and welding to ASTM-A123 specifications to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area. Use "/G" in model number for hot dip galvanized finish, e.g. XT/G-6UP.

MATERIALS & COLORS



Treated #1 Southern Yellow Pine



Treated #1 grade Southern Yellow Pine is pressure treated and kiln dried after treatment (KDAT) to reduce moisture content. Wood preservative (no arsenic) gives superior protection against termites, insects and decay. The lumber is clean to handle, dry and ready for you to water seal, paint or stain. All lumber is precision drilled to facilitate assembly. All exposed edges are removed to 3/8" radius. Use **"TP"** in model number for treated pine. Tables use 2" x 10" planks. Benches can use 2" x 4" or 2" x 10" planks (varies by model). Trash receptacles use 2" x 4" slats. All dimensions are nominal.

Untreated #1 Southern Yellow Pine

Untreated #1 grade Southern Yellow Pine planks, kiln dried to reduce moisture content. The lumber is ready for you to water seal, paint or stain. All lumber is precision drilled to facilitate assembly. All exposed edges are removed to 3/8" radius. Use "**UP**" in model number for untreated pine. Tables use 2" x 10" planks. All dimensions are nominal.

Exotic Imported Hardwoods



Exotic imported hardwoods exhibit high resistance to decay, water damage and physical damage without the use of chemical treatments. Their features often imitate redwood. All of these hardwoods are imported from managed forests. Currently available only as 3" x 4" (nominal) timber for Pilot Rock benches. Species may vary depending on availability and cost. Please inquire.

Construction Heart Redwood



Construction heart redwood is a popular alternative to pine. Select planks are made from the interior grain of American Redwood. Redwood naturally resists decay. It is available only in 3" x 4" (nominal) lumber dimension. All lumber is precision drilled to facilitate assembly. All exposed edges are removed to a 3/8" radius. This grade allows for knots up to 2-1/2" dia. Use "CO" in model number for construction heart redwood.

Other species of lumber: cedar, fir and clear redwood may be available when in stock. Please inquire.

Coated Steel Channel Components for Benches and Tables. Looks like 2x4 lumber. Has the strength of steel.



- Formed steel channel **(SC)** components approximate 2" x 4" lumber dimensions, but are formed using 16 ga. steel plate with 16 ga. bracing. These tops and seats are strong and light weight.
- Formed steel channels (SC), steel end caps and understructure bracing are pre-assembled at the factory. So onsite assembly is easier.
- After assembly each component is thermoplastic coated (/T). See the color chart below.
 Use "/T♦" in model number to specify color choice. See Page 52 for process description.

Replace (�) in model number with letter								
indicating color choice	Black (TB)	Green (TN)	Gray (TA)	Brown (TW)	Red (TR)	Yellow (TY)	Blue (TU)	Tan (TT)

Thermo-plastic Coated Steel Strap, Cut Steel Plate and Formed Steel Channel Components

Several steel components (besides expanded and perforated steel) can also be finished with a thermo-plastic coating. See Page 52 for a process description. These different steel component designs have different Model Number designators. Then a "/T" plus the color letter is added for the thermo-plastic finish. See color chart above.

Steel Material	Thermo-plastic coated steel material is currently available on these products:	
Formed Steel Channel (SC)	Formed Steel Channel (SC) Most rectangular picnic tables (6' & 8'); CXB, AB, APB, and WMB Benches (6' & 8')	
Steel Strap (SS)	CN-R/SS3-36 trash receptacle; CN-R/SS3-ASH ash receptacle; P-23 Planter	
Cut Steel Plate (SP)	B70 and B120 benches; T Series round tables, CN-R/SP2-32 trash receptacle	
Other Steel Products	BR20 bike rack; HRP and HRE bike racks; CN-EXP52 park policeman	

Pilot Rock WATERIALS & COLORS

Thermo-Plastic Coated Expanded Steel and Perforated Steel and Formed Steel Products

Selected Pilot Rock bench, table and trash receptacle products and components (expanded steel, perforated steel, cut/formed steel) are finished with a thermo-plastic coating in your choice of available colors. The thermo-plastic coating is PVC free and phthalate free.

The UV-stabilized thermo-plastic coating is applied in a multistep process of material preparation and finish application, designed and formulated to create superior adhesion. After cleaning, the steel component is heated to 550-600 degrees (depending on the component). It is then lowered into an air-fluidized bed of colored polyethylene powder. This fluid powder fuses and bonds to the heated metal. The component is then baked at high temperature to cure the application. This dipping application provides a coating 35-40 mils thick (as much as 5x thicker than a spray-on coating).

This complete process of cleaning-heating-fusing-baking tightly bonds the powder to the metal, creating a durable, colorfast finish. The thermo-plastic finish includes a superior level of UV protection, does not support mold or mildew growth, and is impact resistant. We use a textured matte finish polyethylene. These finishes are less susceptible to marring and scratching (which is often a problem with gloss finishes).

Expanded steel, perforated steel, and formed steel components are assembled and reinforced with formed steel edge bands, angle irons and bars as appropriate to each product design. All components are single piece welded construction.


Our thermocoat product has been tested by an independent lab, and given the highest rating of DNI - Does Not Ignite and does not support combustion during or after flame exposure.

Two types of Expanded Steel component designs

All of the D-Type and V-Type expanded steel that we use is 3/4"-#9 material with a short longitudinal stretch. A shorter stretch means smaller "diamond" openings, which leaves more material (steel) per foot. The more diamonds there are per lineal foot is your indication that there is more steel left in the structure. Therefore, the top and seats will be stronger. It is also called the "long way design, non flattened expanded metal". "Non flattened" means the steel is "on edge" around the diamonds. This provides a stronger, more rigid material.

D-Type: This standard duty table top/seat and other component design is built for your most common public use applications.

V-Type: SNOW LOAD/EXTREME LOAD RATED. This design incorporates wider edge banding and more structural supports to create a table built for applications and locations that can be more abusive to the structure. This material is especially suited for high elevation areas where winter snow load can destroy average tables. The V-Type Snow Load/Extreme Load design is available on WXT, WXTH, WPTS, XT, XTH, APT, and APTX series tables. See Page 34. *See note below.

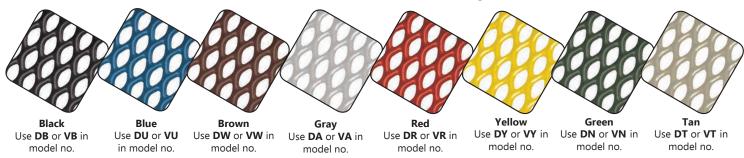


Example: Model XT/G-8DB is equipped with standard duty top/seat structures for regular applications. Example: Model XT/G-8VB is equipped with the snow load rated top/seat structures for more extreme applications.

Two types of Perforated Steel component designs

All of the R-Type and H-Type perforated steel is 14 ga. with 9/16" diameter holes punched on 13/16" straight line centers.

R-Type: This standard duty table top/seat and other component design is built for your most common public use applications.

H-Type: SNOW LOAD/EXTREME LOAD RATED. This design incorporates wider edge banding and more structural supports to create a table built for applications and locations that can be more abusive to the structure. This material is especially suited for high elevation areas where winter snow load can destroy average tables. The H-Type Snow Load/Extreme Load design is available on WXT, WXTH, WPTS, XT, XTH, APT, and APTX series tables. See Page 34. *See note below.

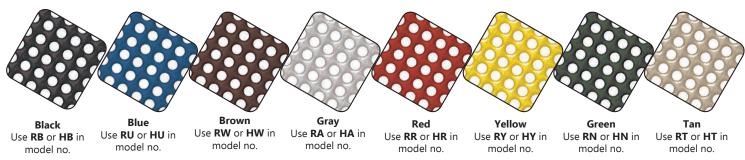

Example for Expanded and Perforated Steel products: XT/G-8♦ Replace (♦) with letters indicating type and color listed under sample. *NOTE: V-Type and H-Type components are used on some benches and square tables. These applications have not been tested or rated for extreme loads.

MATERIALS & COLORS

Pilot Rock

Aluminum



Several select picnic tables and benches can be equipped with seats/top or seat/back of aluminum planks. These planks are extruded 6063-T6 aluminum, equivalent in size to 2" x 10" (nominal) lumber planks. Four structural ribs provide rigid support and strength. The aluminum is clear anodized to specification 204 R1 for a clean, maintenance free finish. All plank ends are covered by an extruded, clear anodized aluminum end cap fastened into place. Table tops are made into single units (at the factory) by connecting the planks with one-piece end caps fastened across each end of the top. Aluminum planks are provided with precision fitted aluminum brackets and galvanized carriage bolts to attach planks to table or bench frames. Use "AL" in model number for clear anodized aluminum, e.g. XT/G-6AL.

Optional: Aluminum (mill finish) components (max. 12 ft. length) are also available with powder coated finish. See Powder Coat Finish description for details.

100% Recycled Plastic Timbers, Planks, Frames, and Other Products

Our recycled plastic material is 100% recycled high-density polyethylene and is formed using a combination of post-consumer and post-industrial waste plastics. There is no virgin plastic in this product. Post-consumer plastic has been used by a consumer and then recycled to avoid dumping in a landfill (such as milk jugs). Post-industrial plastics have gone through a manufacturing process but never reached the consumer (such as product rejects or process wastes). On average our product is 80% post consumer and 20% post industrial (percentages can vary). Our plastic components are 100%

recycled and can also be recycled again and again. There are no toxic chemicals in this product. Plastic by its very nature does not leach.

A solid color is formed throughout the component and a UV stabilizer is added for ultraviolet protection. This recycled plastic is a dense, durable product, offering a long lasting, attractive appearance. It will not splinter or rot, and is resistant to mold and insects. These components are molded into solid dimensional shapes corresponding to nominal lumber dimensions. Recycled plastic components are available in your choice of colors.



Model No. Example for Recycled Plastic products: PCXB/G-4♦24 Replace (♦) with letters indicating color choice listed under sample.

Note: Colors and textures may vary. Colors shown are as close to the actual colors as the printing process is able to reproduce them. When selecting colors, keep in mind that Thermo-plastic Coating for tables and seats and Powder Coating for frames may not be exactly the same color -- i.e., Blue Thermo-plastic Coating for seats and/or table tops and Blue Powder Coating for frames may differ slightly.

Note: Custom colors and textures may be available when ordered in sufficient quantity and additional production lead times.

Graffiti Removal Suggestions

Our recycled plastic lumber is extremely chemical resistant to very harsh chemical removers.

There are several graffiti removal tools on the market that could be used on our plastic lumber. Harsh graffiti removers like MEK, NexGen, and Gasoline solutions will not harm the plastic lumber. Be sure to wash off any residue.

Pressure washing, with detergent added, will remove most dirt, grime,

markings, and debris. When pressure washing, start with the tip far away, and then gradually move closer to the plastic lumber to avoid gouging the plastic lumber with too aggressive of a pressure wash.

If the substance is ground in, oily or sticky; some type of solution will be needed to loosen up the stain to get it out of the textured surface of the plastic lumber.

Pilot Rock WASTIEST REPARTMENT





Model BPRT1/CWT-36 bear resistant receptacle with brown textured powder coat finish, includes liner.

Certified Bear Resistant Trash Receptacle —

Designed and tested to keep bears— and other animals— out.

- Construction: Welded heavy 12- and 14-ga. formed steel with 7-ga. reinforcing and base.
- Front Access Door: The front door design provides easier access to the liner inside and more installation location options. Two latch points per door keep the door(s) tightly closed.
- Large Hatch Opening: The 16-inch square top hatch is secured by a commercial duty stainless steel hinge and self-closing latch. Guards over and in front of this latch restrict access to human fingers and keep bears out.
- Standard Equipment: 36-gallon heavy duty rigid plastic liner(s), four- or six-point surface anchor base with 1/2" x 5" concrete screw anchor bolts (unit must be anchored to be considered bear proof), stainless steel continuous piano hinge on the hatch and doors, interior rain drain to siphon away any leakage, choice of decal for top hatches, tightly fitted top hatch and front door(s). ADA compliant for forward and side reach ranges.

• Finish: Textured powder coat paint available in five colors: brown (/CWT), green (/CNT), blue (/CUT), speckled tan (/CTT) and black (/CBT). See page 50.

• Optional: Band-It trash bag loop to hold your removable trash bag (if you use them) on the included rigid liners. See Page 68.

- **Optional:** Steel recycling plate installed under the top hatch, powder coated Black only. Three holes sizes - choose the hole size that fits your recyclables.
 - BPRP-PC1 has 3" dia. hole.
 - BPRP-PC5 has 4-3/8" dia. hole.
 - BPRP-PC6 has 5-7/8" dia. hole.



Interagency BEAR Committee



Model BPRT3/CUT-108 three-module trash and recycling receptacle, blue textured powder coat finish. Doors open showing included plastic liners.



◆ PAPER ONLY

CANS ONLY

ES PLASTIC ONLY

€3 GLASS ONLY

◆3 ALUMINUM ONLY

نا TRASH ONL

RECYCLE ON!



Model BPRT2/CNT-72 two-module bear proof trash and recycling receptacle green textured powder coat finish. Shown with optional padlock.

MODEL NO.	IGBC CERT.#	MODULES	36 GAL. LINERS INCLUDED	DIMENSIONS H x W x D (INCHES)	DOOR OPENING H x W (INCHES)	OPTIONAL RECYCLING PLATE	DECAL CHOICES	ANCHOR KIT INCLUDED
BPRT1-36	5106	1	1	47 x 25-1/8 x 26-5/8	29-1/8 x 22	BPRP-PC1 3" dia. hole	DE-1 DE-2	ANC5-4
BPRT2-72	5124	2	2	47 x 47-1/8 x 29	29-1/8 x 44	BPRP-PC5 4-3/8" dia. hole	DE-3 DE-4 DE-5	ANC5-6
BPRT3-108	5107	3	3	47 x 68-5/16 x 29	29-1/8 x 44	BPRP-PC6 5-7/8" dia. hole	DE-11 DE-19	ANC5-6

^{*}Certified by the Grizzly and Wolf Discovery Center (GWDC) using the Interagency Grizzly Bear Committee (IGBC) protocol.



Model CN-VDT/P/CN-32 with optional surface mount base plate, green powder coat finish, and optional Model CNG-WHD32C steel trash can.

Varmint Defiant Trash Can Cover -

Keep all kinds of varmints, critters, small animals and other assorted pests out of your trash.

- Construction: Heavy gauge welded steel (16, 12, 10, and, 7 ga. steel) fabrication, mounted on 3-1/2" OD x 1/8" wall steel post. Brown powder coat finish is standard.
- 2 Installation Methods:
- Model CN-VDT-32 uses an embedded post into concrete footing (standard); Model CN-VDT/P-32 provides a bolt down base plate (1/4" x 8" x 8") for a concrete surface (includes anchor kit #ANC5-4 set of (4) 1/2" x 5" concrete screw anchors).
- Operation: The heavy weight hinged cover holds your steel can down, in place. The retainer ring keeps animals from knocking the can out at the bottom. Pull the front door open and its tail closes the throat of the lid. No animal can pull open the door and reach down into the trash can. Place your trash inside the door. When it closes your trash drops into the can. The front door is weighted and balanced to close on its own.
- Security: The top can be padlocked in the down position so only authorized persons can lift it and empty trash. Padlock is included.
- Remove Trash: Pull the top backwards and it latches in the open position. Lift trash can up, out of the retainer ring, empty and replace. Lower the lid and padlock closed.
- Optional: We recommend using Federal Duty trash can Model CNG-WHD32C (not included, order separately). This heavy weight galvanized steel can is strong enough to deter most animals. See Page 69.
- Optional: Your choice of powder coat colors. See Page 50.
- Optional: Band-It trash bag loop to hold your trash bag in place. See Page 68.

This item is not rated to be bear proof. Larger bears may be able to crush your metal can.



Model CN-VDT-32 standard installation is with the embedded post into a concrete footing as illustrated. Pull the cover back to locked position. Then empty trash can.







The cover latches in the up position for easy one-person trash removal.

Deposit your trash. The weighted door is self-closing.

Pilot Rock WASTER REGYCLING



Round Receptacle — Vertical Steel Straps



(Above) Model CN-R/SS2/CU-36 receptacle, blue powder coat finish, shown with optional Model T/CU-2410R steel lid with rain cover, and Model CN/B-1827 plastic liner.

- Model CN-R/SS2-36 trash receptacle is designed to hold most available 30 to 36 gallon liners.
- Fabricated using 1/8" thick x 2" wide steel vertical ribs. The top flares out to include a 1" diameter steel tube ring. The base structure includes a steel flange ring and cross braces with holes to provide anchor points for surface mounting. (Anchor bolts not included.) All components are welded into a single unit. No assembly required.
- Four threaded adjustable levelers located equally around the base ring allow for installation on uneven surfaces.




(Left) Model CN-R/SS2/CN-36 receptacle, green color with optional **Model CN/B-1825** molded plastic lid and Model CN/B-1827 plastic liner.




Model CN-R/SS2/CE-36 receptacle, burgundy color with optional Model CN-SDR/B-24 plastic dome lid and Model CN/B-1827 plastic liner.

- Powder coat finish in your choice of colors. See Page 50.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Trash and recycling lids. See Pages 64-67.
- Optional: Stationary mounts are available. See Page 70. For surface anchors see Page 121.

Round Receptacle — Perforated Steel (3 sizes)



- Standard: Receptacle is coated with UV-stabilized thermo-plastic. Replace (♦) in model number with letter of desired color. See Page 52.
- Optional: Receptacle is hot dip galvanized after fabrication (instead of thermo-plastic coating).
- Optional: Galvanized steel or rigid plastic liners. See Page 69.
- Optional: Trash and Recycling Lids. See Pages 64-67.
- Optional: Stationary mounts. See Page 70. For surface anchors see Page 121.





(Left) Model CN-R/RW-32 Round Perforated Steel Trash Receptacle Holder for 32 gal. containers, brown thermo-plastic coated. Shown with optional **Model CN-PD/W-24** brown plastic dome lid

MODEL NO.	CAPACITY (GALLONS)	DIMENSIONS (INCHES)	LINER (OPTIONAL)
CN-R/R ♦ -32	30 - 36	23-1/4 OD x 29-3/4 H	CN/B-1827
CN-R/R♦-52	52	26-1/2 OD x 29-3/4 H	CN/B-1828
CN-R/R♦-55	55	26-1/2 OD x 36 H	CN/B-1829





Model CN-R/R/G-55 Round Perforated Steel Trash Recentacle Holder for 55 gal. containers, hot dip galvanized finish. Shown with optional Model CN-PD/C-27 cedar plastic dome lid.



Model CN-R/DW-32 Round Expanded Steel Trash Receptacle Holder for 32 gal. containers, brown thermo-plastic coated. Shown with optional Model CN-PD/N-24PC1 green plastic dome recycling lid, and optional Model M2/G embedded mount pedestal base.

▼Round Receptacle — Expanded Steel (3 sizes)

- Fabricated from a single piece of 3/4-#9 expanded steel (diamond holes) and reinforced with 10 ga. top and bottom rings and dieformed cross braces across the bottom providing holes for surface anchoring options. All welded construction, no assembly required.
- Receptacle is coated with UV-stabilized thermo-plastic. Replace (♦) in model number with letter of desired color. See Page 52.
- **Optional**: Galvanized steel or rigid plastic liners. See Page 69.
- Optional: Trash and Recycling Lids. See Pages 64-67.
- Optional: Stationary mounts. See Page 70. For surface anchors see Page 121.

MODEL NO.	CAPACITY (GALLONS)	DIMENSIONS (INCHES)	LINER (OPTIONAL)
CN-R/D ♦ -32	30 - 36	23-1/4 OD x 29-3/4 H	CN/B-1827
CN-R/D ♦ -52	52	26-1/2 OD x 29-3/4 H	CN/B-1828
CN-R/D ♦ -55	55	26-1/2 OD x 36 H	CN/B-1829



Model CN-R/DN-52 recentacle optional Model CN-PD/N-27 plastic dome lid, optional M7/G surface pedestal mount.

Square Receptacle — Expanded Steel

- Model CN-Q/D-32/2 will hold most 30-36 gallon liners..
- This container is formed using 4 flat expanded steel side panels, a base reinforced with cross braces, and a canopy top with large openings for easy trash disposal. Each piece is thermo-plastic coated. See Page 52 for colors. This unit is shipped knocked down. Galvanized fasteners included.
- The bottom panel keeps the liner off the ground. Anchor holes in cross braces can be used to secure receptacle in place (anchor bolts
- Optional: Stationary mounts are available. See Page 70. For surface anchors see Page 121.
- Optional: Galvanized steel cans or rigid plastic liners are available. See Page 69.



Model CN-Q/DR-32/2 receptacle, expanded steel, red thermo-plastic coating. Shown with optional Model CNG-2310C galvanized steel trash can.

■ Park Policeman

- Model CN-EXP52 offers a large 48-gallon capacity. The tapered body is 23-1/2" diameter at the top and 19-1/2" diameter at the bottom, 33" tall.
- This heavy-duty waste receptacle is fabricated using expanded metal mesh for the body, with rolled top and bottom edging for added strength, safety and easy handling. Six vertical ribs and two horizontal rings reinforce the whole structure. The hot dip galvanized finish is standard.
- Optional: Trash and recycling lids. See Pages 64-67.
- Optional: Thermo-plastic coat finish (instead of galvanized finish). See Page 52.
- Optional: Seasonal ground anchors. See Page 70.

Model CN/G-EXP52 Receptacle and optional Model CN/G-5555 lid.



Model CN/TN-EXP52 Receptacle with green thermo-plastic coating and optional Model T/CN-2410A steel ash lid.

Pilot Rock WASTER RECOYCLING



Trash and Recycling Receptacles — TRH Series

- Model TRH Trash Receptacle Holders are an attractive way to collect trash or recyclables.
- Model TRH Trash Receptacle Holders are available in two sizes:
 - Model TRH-32 (22-3/8" ID) holds a 30- to 36-gallon capacity can or liner.
 - Model TRH-55 (25-3/8" ID) holds a 55-gallon barrel or liner.
- Standard: 2" x 4" (nom.) slat material: pressure treated #1 southern yellow pine.
- Optional: 100% recycled plastic slats. See Page 53.
- TRH frames include a top and bottom ring; both rolled using 10 ga. steel with a formed flange for strength. The base ring is reinforced with die-formed cross braces. These braces also serve to keep the container inside the TRH up off the ground. Each ring is hot dip galvanized after fabrication. Galvanized fasteners included.





- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Trash and recycling lids. See Page 64-67.
- Optional: Stationary mounts. See Page 70. For surface anchors, see Page 121.
- Optional: Powder coat finish on frame rings. See Page 50.
- Optional: Custom engraving on recycled plastic slats. See Page 26.



Model TRH/G-55PC24 receptacle, cedar colored plastic slats, with Model TG-27X flat lid.

Side Opening Trash Kit

- Model TRH-55/SO receptacle includes a side opening to deposit trash into a 30-32 gallon liner. Kit includes: Model TG-27X flat lid, a hinge/hasp kit to attach the lid to top frame ring, one brass padlock to secure lid, and a 30-32 gallon plastic trash can, galvanized finish on steel components.
- Slats available in treated pine or 100% recycled plastic in a choice of colors. See Page 53.
- Optional: Powder coat finish on frames and lid in choice of colors. See Page 50.



See Page 84.

WAS I = REPAIR ON PILOT ROCK



Square Receptacle — TRQ Series

- Model TRQ Trash Receptacle comes in a Square shape for a different look. Model TRQ-32 receptacles hold 30 to 36-gallon capacity liners.
- Standard 2" x 4" (nom.) slat material: pressure treated #1 southern yellow pine.
- Optional: 100% recycled plastic slats. See Page 53.



- TRQ frames include a top and bottom ring, fabricated using 10 ga. steel with a formed flange for strength. The base ring is reinforced with die-formed cross braces. These braces also serve to keep the container inside the TRQ up off the ground. Each ring is hot dip galvanized after fabrication. Galvanized fasteners are included.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Trash and recycling lids. See Pages 64-67.
- Optional: Stationary mounts. See Page 70. For surface anchors see Page 121.
- Optional: Powder coat finish on frame rings. See Page 50.
- Optional: Custom engraving on recycled plastic slats. See Page 26.

(Above) Model TRQ/G-32PA24 receptacle, gray colored plastic slats, with optional Model CN-PQD/N-27 lid.







Ash Receptacles — **Round TRH & Square TRQ Series**

- · Ash Receptacles match in style and design the TRH round and TRQ square trash and recycling receptacles. Coordinate both smoking waste and trash collection with matched receptacles.
- Rugged construction for outdoor use welded steel frame rings with hot dip galvanized finish.
- Slats are 2" x 4" (nom.) treated pine or 100% recycled plastic. See Pages 51 & 53.
- · Ash Receptacle can stand alone, be bolted to the surface, or be mounted in place with optional posts. See Page 70.
- · Large capacity aluminum sand bowl is cabled to receptacle - it can be removed for cleaning but not stolen.
- Deep sand bowl protects sand from the wind.
- · Includes an 8 lb. bag of sand.



Model TRQ/G-ASH/PW24 square ash receptacle with brown 100% recycled plastic slats. Shown on Model M11/G surface pedestal mount.

Pilot Rock WASTE & RECYCLING



Amherst Receptacles — Round or Square

- The Amherst Series receptacles feature all steel, all welded construction.
- The vertical and horizontal straps are fabricated from 10 ga. steel. Three horizontal bands and the integral steel tube around the top provide reinforcement. Powder coated finish. See Page 50. The receptacles are shipped fully assembled. Includes #CK-5 lid cable kit.
- The steel bottom braces include holes for surface anchors (not included). Optional elevated mounting posts (Models M7/G and M8/G) are available to secure the receptacles in place. See Page 70. All Amherst trash receptacles include four levelers.
- Two shapes: the traditional Round shape is Model CN-AMR. The contemporary Square shape is Model CN-AMQ. Both will hold up to a 36-gallon capacity liner (optional).



Model CN-AMQ/CB-32 square steel receptacle, black powder coated finish. Shown with optional Model CN-PQD/A-24 gray square plastic dome lid.

- · The Amherst design positions the optional lid inside and below the top of the flare to keep wind and weather from dislodging it. Both receptacles have multiple lid choices. See Pages 64-67.
- · Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Steel bands around AMR and AMQ provide an area for your custom vinyl decal signage. See Page 68.



Model CN-AMR/CW-32 round steel receptacle, brown powder coated finish. Shown with optional **Model** CN-PD/N-24 green plastic dome lid.



Model CN-AMQ/CN-32 square steel receptacle, green powder coated finish. Shown with optional Model TQ/CN-2410R steel lid with rain cover. Shown with optional signage.



Model CN-AMR/CN-32 round steel receptacle, green powder coated finish. Shown with optional Model T/CN-2410R steel lid with rain cover.



Model CN-AMR/CU-ASH round ash receptacle, blue powder coat finish.

Ash Receptacles — **Round AMR and Square AMQ Series**


- Ash Receptacles match in style and design the Amherst AMR round and AMQ square trash receptacles. Coordinate both smoking waste and trash collection with matched receptacles.
- Rugged construction for outdoor use all steel welded fabrication mirrors the specifications of the full-size Amherst trash receptacles.
- Powder coat finish. See Page 50 for colors.
- · Ash Receptacle can stand alone, be bolted to the surface, or be mounted in place with optional posts. See Page 70.
- Large capacity aluminum sand bowl is cabled to receptacle it can be removed for cleaning but not stolen.
- · Deep sand bowl helps protect sand from the wind.
- · Includes 8 lb. bag of sand.



Model CN-AMQ/CB-ASH square ash receptacle. black powder coat finish.

Round Receptacle — Cut Steel Plate

- Model CN-R/SP2-32 will hold most 30-36 gallon liners.
- Formed using a single piece of 10 ga. cut steel plate.
- The base includes steel cross braces to reinforce the receptacle and to keep the liner inside up off the ground. Holes in these cross braces provide anchor points for surface mounting (anchor bolts not included).
- Colorful thermo-plastic coat finish. See Page 51.



- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Plastic or steel lids. See Pages 64-67.



Model CN-R/SP2/TA-32 cut steel plate receptacle, thermo-plastic coated gray, optional Model CN-PD/U-24PC5 plastic dome recycling lid, optional Model M2/G embedded stationary mount, and Model CN/B-1827 liner.

optional Model CN-PD/N-24 plastic dome lid, optional Model M3/G surface mount, and Model CN/B-1827 liner.

Model CN-R/SP2/TN-32 cut steel plate receptacle, thermo-plastic coated green,

Steel Strap Receptacle with Door

- Model CN-R/SS2-36D steel strap receptacle with a side open door for easy access to remove and empty the liner inside.
- Fabricated using 1/8" thick x 2" wide steel vertical ribs. The flare top is reinforced with a 1" dia. steel tube ring. The base structure includes a steel flange ring and cross braces. These braces include holes for surface anchor points (anchors not included) or pedestal mounts. Welded into a single unit. No assembly required.
- Includes threaded adjustable levelers located equally around the base ring.
- Base ring supports liner 2" off the ground for longer life.
- Powder coat finish in your choice of colors. See Page 50.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Trash or recycling lids. See Pages 64-67.
- Optional: Stationary mounts (M2 or M3). See Page 70.
- Optional: ANC2-4 set of (4) 3/8" x 5" concrete surface screw anchors. See Page 121.



Model CN-R/SS2/CR-36D round steel strap receptacle with door, finished in red powder coat. Model CN-SDR/A-24 round plastic dome lid with square door.



with black powder coat finish and CN/B-1827 rigid plastic liner.

Same recentacle with door open shown with Model T/CB-2410 flat steel lid with black powder coat finish and CN/B-1827 rigid plastic liner.

Pilot Rock WASTERRICHYCHING



Square Steel Frame & Inlay Receptacle

- Model CN-Q-36 square frame receptacle with inlaid slats is the perfect site complement for the B130 Series Benches (page 5) and the T700 Series Picnic Tables (page 46). This square receptacle completes the ensemble. It also looks great on its own.
- Fabricated using 2" x 2" x 11 ga. square steel tube and steel channel for the four side panel frames. Each side frame is a welded single unit. Each corner post includes an anchor plate to secure the receptacle on site if desired (anchor bolts not included).
- All steel frame components have a powder coat finish in your color choice. See Page 50.
- Side panel inlay material: 1" x 4" (nom.) 100% recycled plastic in choice of colors. See Page 53. All inlaid planks are installed at the factory.
- Assembly of four side panels to each other is required on site.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Plastic or steel square lids. See Pages 64-67.
- Optional: #ANC3-4 set of (4) 3/8" x 3" concrete surface screw anchors. See Page 121.





(Above) Model CN-Q/SS4/CB-36D finished in black powder coat. Model CN-PQD/A-24 square plastic dome lid and CN/B-1827 rigid plastic liner.

(Right) Model CN-Q/SS4/CY-36D receptacle with yellow powder coat finish, door open. Shown with Model TQ/CY-2410 flat steel lid and CN/B-1827 rigid plastic liner.

Square Steel Strap Receptacle with Door

- Model CN-Q/SS4-36D square steel strap receptacle includes a side open door for easy access to remove and empty the liner inside. And it offers the alternate square shape.
- Fabricated using 1/8" thick x 2" wide steel vertical ribs. The flare top is reinforced with a 1" dia. steel tube ring. The base structure includes a steel flange ring and cross braces. These braces include holes for surface anchor points (anchors not included) or pedestal mounts. Welded into a single unit. No assembly required.
- Includes threaded adjustable levelers located equally around the base.
- Base ring supports liner 2" off the ground for longer useful life.
- Powder coat finish in your choice of colors. See Page 50.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Plastic or steel square lids. See Pages 64-67.
- Optional: Stationary mounts (M2 or M3). See Page 70.
- Optional: ANC2-4 set of (4) 3/8" x 5" concrete surface screw anchors. See Page 121.

Round Receptacle – Vertical Wave Steel Strap

- **Model CN-R/SS3-36** trash receptacle is designed to hold most available 30-36 gallon liners. Dimensions: 32" tall x 29" OD x 22-3/4" ID.
- Fabricated using 1/8" thick x 1" wide steel vertical ribs with a die formed wave pattern. The top is finished and reinforced with a steel tube ring of 1" OD x 14 ga. wall steel tube. The base structure includes a 10 ga. steel ring and cross braces with holes to provide anchor points for surface mounting (anchor bolts are not included). Welded into a single unit, no assembly required.
- Four threaded adjustable levelers located equally around the base ring.
- Thermo plastic coat finish in your choice of colors. See Page 51.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: Trash or recycling lids. See Pages 64-67.
- **Optional**: Anchor kit #ANC3-4 (four 3/8" x 3" concrete screw anchors) for hard surface mounting. *See Page 121*.
- Optional: Matching Ash Receptacle (see below) and Planter (see Page 84).

Model CN-R/SS3/TN-36 receptacle, green thermo-plastic coat finish, shown with optional Model T/CN-2410 flat steel lid with green powder coat finish, and optional CN/B-1827 liner.

Ash Receptacle – Vertical Wave Steel Straps

- **Model CN-R/SS3-ASH** ash receptacle is designed to match in style and design the CN-R/SS3-36 Trash Receptacle (see above). Dimensions: 29" tall x 20" OD.
- Rugged steel construction for outdoor use all steel welded fabrication mirrors the specifications of the full size trash receptacle. No assembly required.
- Thermo plastic coat finish in your choice of colors. See Page 51.
- Ash Receptacle can stand alone, be bolted to the surface or be mounted in place with optional posts. See Page 70.
- Large capacity aluminum sand bowl is cabled to receptacle it can be removed for cleaning but not stolen.
- Deep sand bowl helps protect sand from wind.
- Includes 8 lb. bag of sand.

Model CN-R/SS3/TW-ASH round ash receptacle, brown thermo plastic coat finish.





Smoker's Stack

- All steel construction won't melt or burn.
- Remove cigarette and cigar waste from view. Convenient size opening accepts all kinds of tobacco waste, but restricts deposit of other trash.
- Heavy gauge all steel construction will resist vandalism. Can be used in remote park and trail locations and in any public setting. Stands 40" tall. Includes decal identification.
- Two piece set includes: Square outer mounting post with bolt down base plate (concrete
 anchor bolts included); Round inner collection tube which lifts out to empty waste. A
 recessed set screw locks collection tube inside post and deters vandals. Requires allen
 wrench (included) to remove.
- Powder coated finish. See Page 50 for colors.



Easy removal of inner Collection Tube.



Pilot Rock WASTEWRICHMG

Pilot Rock Plastic Dome Lids

• Self-closing, weighted hatch • Eight colors available



Model No.	I.D.	O.D.	Use with these Receptacle Holders				
CN-PD/♦-27 27-1/4" 27-3/4"		27-3/4"	TRH-32, TRH-55 (fits on top ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55				
CN-PD/+-24	CN-PD/+-24 24" 24-1/2" C		TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's				

	XXXXXXX										
Cedar (C)	Brown (W)	Yellow (Y)	Green (N)	Gray (A)	Black (B)	Red (R)	Blue (U)				
	Replace (♦) in model number with letter indicating color choice										



Model No.	I.D.	O.D.	Use with these Receptacle Holders
CN-PQD/+-27	27"	27-1/2"	TRQ-32
CN-PQD/+-24	23-1/2"	24"	CN-AMQ-32, TRQ-32, CN-Q-36, CN-Q/SS4-36D

• Self-closing, spring loaded hatch • Four colors available



Model No.	I.D.	O.D.	Use with these Receptacle Holders
CN/+-4455	24"	24-3/4"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel

Brown (W)	Gray (A)	Blue (U)							
Replace (•) in model number with letter indicating color choice									

Square Door


Self-closing hatch
 Large opening
 Eight colors available



Model No.	I.D.	O.D.	Use with these Receptacle Holders
CN-SDR/+-24	24"	24-3/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel

Cedar (C)	Brown (W)	Yellow (Y)	Green (N)	Gray (A)	Black (B)	Red (R)	Blue (U)				
	Replace (♦) in model number with letter indicating color choice										

Steel Dome Lids — Galvanized or Powder Coated





	Model No.	I.D.	O.D.	Use with these Receptacle Holders				
	CN/+-3434	21"	21-3/4"	Federal Duty 32 Gal. Galvanized Can, CNG-WHD32C				
CN/♦-5555 23-3/4" 24-1/2"				TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel				
	CN/+-2755	27-1/8"	27-1/4"	TRH-55, CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55				
	Replace (*) in model number with (G) for galvanized or letter indicating powder coat color choice. See Page 50 for colors							

TIP: For all lids, comfirm that the inside diameter of the lid (ID) will fit the outside diameter (OD) of your receptacle. Some lids may fit more closely than others.




WAS I = CAR HANGE Pilot Rock

Plastic Dome Lids for Recycling







Two hole sizes

- · Choice of eight colors
- Includes recycling decal. See below.

Model No.	Hole Dia.	I.D.	O.D.				
CN-PD/+-27PC1	3"	27-1/4"	27-3/4"	TRH-32, TRH-55 (fits on top ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55			
CN-PD/+-27PC5	4-3/8"	27-1/4	27-3/4				
CN-PD/+-24PC1	3"			TRH-32, TRH-55 (fits on barrel inside), CN-AMR-3: CN-R/R-32, CN-R/D-32, CN-R/SS2-36,			
CN-PD/+-24PC5	4-3/8"	24"	24-1/2"	CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's			

Cedar (C)	Brown (W)	Yellow (Y)	Green (N)	Gray (A)	Black (B)	Red (R)	Blue (U)			
	Replace (*) in model number with letter indicating color choice									

- Dome is molded with a solid door panel
- Two hole sizes


- Eight colors available
- Includes recycling decal. See below.

Model No.	Hole Dia.	I.D.	O.D.	Use with these Receptacle Holders			
CN-SDR/+-24PC1	3"		24-3/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36,			
CN-SDR/+-24PC5	4-3/8"	24"	24-3/6	CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel			

			,				
		44	CASSIVAN				
Cedar (C)	Brown (W)	Yellow (Y)	Green (N)	Gray (A)	Black (B)	Red (R)	Blue (U)

Replace (*) in model number with letter indicating color choice

Plastic Canopy Lid for Recycling — **Collect Recyclable Cans and Paper**



- Single piece molded plastic lid is available in the popular green recycling color.
 - Openings on both ends of the canony
- Twin vinyl trimmed openings are available in three sizes: 3" round, 4-3/8" round, and 2" x 7-1/2" slot.
- Includes two recycling decals. See below.



•	opening:	S ON DC	our enus	or the Ca	пору.

Model No.	I.D.	O.D.	Hole Dia.	Use with these Receptacle Holders
CN/N-3031PC1	24-1/8"	/8" 24-1/2"	3"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32,
CN/N-3031PC5			4-3/8"	CN-R/SS2-36, CN-R/SS2-36D,
CN/N-3031PS			2" x 7-1/2"	CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel



CN/N-3031PS

CN/N-3031PC5





RECYCLE







Recycling Decals

The plastic recycling lids shown on this page each include a "Recycle" decal. The vertical decals are 4" x 6-1/4" tall; the horizontal decal is 2-1/2" x 8" wide. Please specify which decal you need for your collection program:

Model DE-22 "Cans Only" (we recommend 3" dia. hole)

Model DE-23 "Plastic Bottles Only" (we recommend 4-3/8" dia. hole)

Model DE-24 "Cans & Bottles Only" (we recommend 4-3/8" dia. hole)

Model DE-34 "Recycle Only" (use with any round hole size)

Model DE-26 "Paper Only" (for use on CN/N-3031PS lid only)

Custom Decals are available. Same size and colors. Minimum order (15) of same design.

Pilot Rock WASTER REGYOUNG

Flat Steel Trash and Recycling Lids

- Fabricated from 16 ga. galvanized steel. For standard galvanized finish replace (♦) in model number with "G".
- Optional powder coat available. For color choices see Page 50. Replace (♦) in model number with letter of desired color.
- · Recycling Lid includes a vinyl-trimmed hole in choice of three sizes.
- Hinge and Hasp kits, Recycling Decals, and Lid Security Kits available. See Page 68.

Trash Can Lids (No Hole)



Model No.	I.D.	O.D.	Use with these Receptacle Holders	
T ♦ -19X	19"	19-1/8"	30 Gal. barrel	
T♦-22X	22"	22-1/8"	TRH-20	
T ♦ -24X	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel	
T ♦ -27X	27-1/8"	27-1/4"	TRH-55 (fits on top frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55	

Trash Can Lid with 10" Spring-loaded Hatch



Model No.	I.D.	O.D.	Use with these Receptacle Holders	
T ♦ -19	19"	19-1/8"	30 Gal. barrel	
T ♦ -22	22"	22-1/8"	FRH-20	
T ∲ -24	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel	
T ♦ -27	27-1/8"	27-1/4"	TRH-55 (fits on top frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55	

Recycling Lid with 3" Diam. Hole



Model No.	I.D.	O.D.	Use with these Receptacle Holders	
T♦-22PC1	22"	22-1/8"	TRH-20	
T ♦ -24PC1	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel	
T♦-27PC1	27-1/8"	27-1/4"	TRH-55 (fits on top frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55	

Recycling Lid with 4-3/8" Diam. Hole



Model No.	I.D.	O.D.	Use with these Receptacle Holders	
T♦-22PC5	22"	22-1/8"	TRH-20	
T ♦ -24PC5	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel	
T♦-27PC5	27-1/8"	27-1/4"	TRH-55 (fits on top frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55	

Recycling Lid with 5-7/8" Diam. Hole




Model No.	I.D.	O.D.	Use with these Receptacle Holders	
T ♦ -22PC6	22"	22-1/8"	TRH-20	
T ♦ -24PC6	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel	
T ♦ -27PC6	27-1/8"	27-1/4"	TRH-55 (fits on top frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55	

TIP: For all lids, comfirm that the inside diameter of the lid (ID) will fit the outside 2 3 - 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 21 diameter (OD) of your receptacle. Some lids may fit more closely than others.

WASTE & RECYCLING

Pilot Rock





• Optional: choice of powder coat colors. See Page 50. Replace (♦) in model number with letter indicating color choice.

- 10" diameter hole
- **Optional:** 12" diameter rain cover, add "R" to model number
- **Optional:** 6" diameter ashtray in rain cover, add "A" to model number



Model No.	I.D.	O.D.	Use with these Receptacle Holders:
T/\$-2410 T/\$-2410R T/\$-2410A	24"	24-1/8"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's
T/♦-2710 T/♦-2710R T/♦-2710A	27-1/8"	27-1/4"	TRH-55 (fits on top of frame ring), CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55

Model No.	I.D.	O.D.	Use with these Receptacle Holders:
TQ/♦-2410 TQ/♦-2410R TQ/♦-2410A	23-5/8"	23-3/4"	CN-AMQ-32, TRQ-32, CN-Q-36, CN-Q/SS4-36D



Molded Plastic Lids



Round

Model No.	I.D.	O.D.	Center Hole Diameter	Use with these Receptacle Holders:
CN/B-1825	24-3/8"	25"	10"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36,
CN/B-55FT	24"	24-3/4"	15"	CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel

Color: Black only



Square

Model No.	I.D.	O.D.	Center Hole Diameter	Use with these Receptacle Holders:
CN/B-1826	23-3/8"	24"	10"	CN-AMQ-32, TRQ-32, CN-Q-36, CN-Q/SS4-36D

Color: Black only



Model No.	I.D.	O.D.	Use with these Receptacle Holders:
CN/B-3030	24-1/8"	24-1/2"	TRH-32, TRH-55 (fits on barrel inside), CN-AMR-32, CN-R/R-32, CN-R/D-32, CN-R/SS2-36, CN-R/SS2-36D, CN-EXP52, CN-R/SP2-32, CN-TR-52, CN-R/SS3-36, RA's, 55 gal. barrel

Color: Black only

Pilot Rock WASTER REGIONS

Hasp and Hinge Kits



Model HHG-1: Hinge/Hasp Kit to mount Model T-19 and T-24 lids to 30or 55-gallon barrels.



Model HHG-2: Hinge/Hasp Kit to mount Model T-22, T-24, and T-27 lids to top frame ring of all TRH receptacles.

Made from galvanized steel. Zinc plated included. fasteners PL-1 brass Optional padlock through hasp prevents theft of contents and disposal of other trash. For use with Model T-19, T-22, T-24, and T-27 flat steel trash and recycling lids.



HHG-5 Hinge Hasp Kit


- Model HHG-5 is a unique hinge design that allows the lid to be fully opened but it remains permanently attached to the barrel. For use with our T-19 and T-24 steel lids on Page 66 and 30- or 55-gallon barrels.
- Features: Galvanized finish, includes all fasteners and barrel edge spacer.
- Optional: Lid, barrel and #PL-1 brass

Lid Security Kits



CK-1 Chain Kit

40" x 1/8" Galvanized welded steel chain with 2 equal leg "S" hooks (Used only with RPP posts)



CK-5 Cable Kit

36" of Plastic coated 1/8" steel cable with 2 aluminum crimp sleeves



CK-6 Multiple Application Chain Kit,

24" x 1/8" Galvanized welded steel chain with 1 eyescrew, 2 equal leg "S" hooks, and 2 unequal leg "S" hooks



WSK-1 Web Strap Kit

1" x 14" of woven nylon strap with snap hook, grommet hole, 1 D-ring and 1 "S" hook

Band-It Premium Elastic Trash Can Loop



- Holds plastic trash bag in place with elastic band around the top edge of the liner.
- No more mess when a plastic bag falls down inside the can. Fits metal and plastic cans from 20- to 55-gallon sizes.
- Easy to install. Reusable.
- Sold in case lots only-36 individually packaged Band-Its per case.
- Order Item #CN-BANDIT44455.
- Note: We do not sell the plastic trash bags.

Recycling Decals for Lids

Self-adhesive decals, 3" x 15", green letters on white vinyl background for identification of intended use for recycling units.

Model DE-1: "CANS ONLY" Model DE-2: "PAPER ONLY" Model DE-3: "PLASTIC ONLY" Model DE-4: "GLASS ONLY" Model DE-5: "ALUMINUM ONLY" Model DE-11: "TRASH ONLY" Model DE-19: "RECYCLE ONLY"

Custom Decals Available.

- 1. Same size and colors as above but with your custom message.
- 2. Design a custom decal specifying size, shape, color and message.
- 3. A minimum quantity may apply.







◆ PAPER ONLY DE-2











WASTIER RICHY OF INCE





Regular Duty Galvanized Steel Cans					
Model No.	Capacity	O.D.	Height	Weight	Use with these Receptacle Holders
CNG-2310C without lid. CNG-2310CL includes lid	31 gal.	20-1/2 in.	27 in.	10 lbs. 12 lbs.	CN-R/SS2-36, CN-R/SS2-36D, CN-R/SP2-32, CN-R/R-32, CN-R/D-32, CN-Q/D-32/2, CN-Q-36, CN-Q/SS4-36D, TRH-32, TRQ-32, TRH-55/SO, CN-AMR-32, CN-AMQ-32, CN-R/SP3-36D, CN-R/SS3-36, RPP Post, CH-4, RA Arrays, CN-VDT-32, HCB-1

Lighter weight, 27 ga. galvanized steel cans



Heavy Duty Rigid Plastic Liners							
Model No.	Capacity	O.D.		Height	Weight	Use with these Receptacle Holders	
CN/B-1827	36 gal.	<i>Top</i> 21 in.	Bottom 18 in.	28 in.	10 lbs.	CN-R/SS2-36, CN-R/SS2-36D, CN-R/SP2-32, CN-R/R-32, CN-R/D-32, CN-Q/D-32/2, CN-Q-36, CN-Q/SS4-36D, TRH-32, TRQ-32, TRH-55/SO, CN-AMR-32, CN-AMQ-32, CN-EXP52, CN-TR-52, CN-R/SP3-36D, CN-R/SS3-36, RA Arrays, BPRT Series	
CN/B-1828	52 gal.	25 in.	22 in.	29 in.	11 lbs.	CN-R/R-52, CN-R/D-52	
CN/B-1829	55 gal.	23-5/8 in.	20-7/8 in.	35 in.	14 lbs.	CN-R/R-55, CN-R/D-55, TRH-55	



Rigid Plastic Liner						
Model No.	Capacity	pacity O.D. Height Weight Use with these Receptacle Holders				
CN-4132C	30 gal.	23 in.	27 in.	5 lbs.	CN-R/SS2-36, CN-R/SS2-36D, CN-R/SP2-32, CN-R/R-32, CN-R/D-32, CN-Q/D-32/2, CN-Q-36, CN-Q/SS4-36D, TRH-32, TRQ-32, TRH-55/SO, CN-AMR-32, CN-AMQ-32, CN-R/SP3-36D, CN-R/SS3-36, RA Arrays, BPRT Series	



Federal Duty Galvanized Steel Cans					
Model No.	Capacity	O.D.	Height	Weight	Use with these Receptacle Holders
CNG-WHD32C without lid. CNG-WHD32CL includes lid	32 gal.	21-1/4 in.	26-1/4 in.	19 lbs. 22 lbs.	CN-R/SS2-36, CN-R/SS2-36D, CN-R/SP2-32, CN-R/R-32, CN-R/D-32, CN-Q/D-32/2, CN-Q-36, CN-Q/SS4-36D, TRH-32, TRQ-32, TRH-55/SO, CN-AMR-32, CN-AMQ-32, CN-R/SP3-36D, CN-R/SS3-36, RPP Post, CH-4, RA Arrays, CN-VDT-32, HCB-1
Heavy 23 ga. galvani	Heavy 23 ga. galvanized (ASTM A123 or A653) steel cans. Meets Fed. Spec. NSN:7240-00-160-0440 and 0441				



Coordinate **Trash Receptacles** with other products to create beautiful outdoor spaces!

Pilot Rock WASTIEST NEW YORK

Mounts for Trash Receptacles — Elevated


- A 2-3/8" OD steel pipe base post, welded to structural steel angle cross arms, bolts to the cross braces in the receptacle base ring (fasteners included).
- Elevated Pedestal Mounts supports receptacles 8" above ground.
- Standard hot dip galvanized finish (/G).
- Optional powder coat finish. See Page 50.

Embedded Pedestal Mount The post is embedded into a concrete footing.	Model No.	Support	Use with these Receptacle Holders	Model No.	Surface Pedestal Mount Includes a welded 1/4" x 8" x 8" base plate anchored to surface (anchor bolts not included). See Page 121.
	M2	3 Crossarms	TRH-32, TRQ-32, CN-R/R32, CN-R/D-32, CN-Q/D-32/2, CN-R/SS2-36, CN-R/SS2-36D, CN-R/SP2-32, CN-R/SS3-36, CN-Q/SS4-36D	МЗ	
	M8	4 Crossarms	TRH-55, CN-AMR, CN-AMQ, CN-R/D-52, CN-R/D-55, CN-R/R-52, CN-R/R-55	M7	

Mounts for Trash Receptacles — Ground Level

• Seasonal Anchors for ground level installation. Four black enamel (/B) steel rods install through holes in cross braces of bottom frame ring and into ground. Allows for relocation of receptacle.

Seasonal Ground	Model	Receptacle	Use with these
Level Mount	No.	Mount	Receptacle Holders
	M6/B	Steel Rods	TRH-32, TRH-55, TRH-55/SO, TRQ-32, CN-AMR, CN/AMQ, CN-EXP52, CN-Q/D-32/2, CN-R/R-32, CN-R/D-32, CN-R/SP2-32, CN-R/SS2-36, CN-R/SS3-36, CN-R/R-52, CN-R/D-52, CN-R/R-55, CN-R/D-55, CN-R-SS2-36D, CN-Q-SS4-36D Included with RA Arrays.



TRH and TRQ receptacle base frames include (3 or 4) 9/32" dia. holes in flange to allow anchoring to a concrete surface using 1/4" x 2-1/4" concrete screws. Anchor bolts are not provided. NOTE: use same size anchors for TRH-ASH and TRQ-ASH receptacles, and P-10 planters.

Mounts for Ash Receptacles — Elevated

- 1.90" OD x 11 ga. steel tube post welded to a 10 ga. steel formed mounting plate, four 7/16" bolt holes match plate in the bottom of each ash receptacle (fasteners included).
- Elevated Pedestal Mounts supports receptacles 8" above ground.
- Standard hot dip galvanized finish (/G).
- Optional powder coat finish. See Page 50.

Embedded Pedestal Mount The post is embedded into a concrete footing.	Model No.	Support	Use with these Receptacle Holders	Model No.	Surface Pedestal Mount Includes a welded 1/4" x 8" x 8" base plate anchored to surface (anchor bolts not included). See Page 121.
	M10	Plate	TRH-ASH, TRQ-ASH, AMR-ASH, AMQ-ASH, CN-R/SS3-ASH	M11	



(Above) Model RPP/W-2, brown recycled plastic post, hardware for 2 (optional) cans.

Trash Can Hanger — Recycled Plastic Post

- Massive 6" x 6" (nom.) x 5 ft. long post, buried 2 ft. into ground to provide solid base.
- Post and hangers support trash cans above ground. Optional trash cans available. See Page 69.
- Model RPP Post is 100% recycled plastic See Page 53. Plastic post is reinforced with molded-in steel pipe.
- Post kit can be equipped to hang 1 or 2 cans. (Specify when ordering.) Mounting hardware (base plate and J-hook) is formed from 3/16" steel, hot dip galvanized. Post kit includes chain kit to secure trash can lid to can base plate. All galvanized lag bolts provided. Attach support hardware to accommodate cans of various sizes.
- Post can hold up to 4 trash cans by ordering additional hardware kits (Model WP/ G-H) and chain kits (Model CK-1).

Model	Post Material	Includes hardware for	Optional Additional hardware		
RPP/♦-1	Recycled	1 Can	To mount additional cans order (1) #WP/G-H hardware kit		
RPP/♦-2	Plastic	2 Cans	and (1) #CK-1 Chain Kit for each can.		
Replace (*) in model number with letters indicating color choice. See Page 53.					



Trash Can Hanger — Steel Post

- Model CH-4 Trash Can Hanger provides support for up to 4 steel trash cans.
- Central post is 1-7/8" OD steel pipe. Installs into a concrete footing.
- Steel handle hooks and bottom supports are welded to adjustable collars. The set screws in these collars allow you to adjust their positions to accommodate cans of various capacities and styles.
- Hot dip galvanized finish is standard (Model CH/G-4).
- Optional: Powder coat finish available. See Page 50.
- Optional: Trash cans available. See Page 69.
- Optional: Model CK-1 chain kit to secure can and lid to post. See Page 68.

Model CH/G-4 Trash Can Hanger. Shown with optional trash cans Model CNG-2310CL



Anchor Stake

- Model AH/G-3 Anchor Stake Kit is made of heavy gauge steel and 3/16" x 1-3/4" angle. Installs permanently into concrete footing. Kit includes anchor stake, two galvanized handles for barrel and fasteners.
- Will accommodate your 30- or 55-gallon barrels (not included).
- · Keeps barrel off the ground to extend life. Maintains barrel upright despite tampering, rodents and wind. Also provides place to secure barrel cover (not included).
- Anchor stake has hot dip galvanized finish.
- Combine AH/G-3 kit with your barrel and our optional Trash Can Lids Model TG-19 or TG-24 for a complete, economical trash collection system. See lids on Page 66.





Kit includes: stake, barrel handles and fasteners.

Pilot Rock WASTERNAME



RA-3



Model RA3/G-PA 3-module recycling array, gray recycled plastic post and slats. Shown with optional Model TG-24 galvanized steel recycling and trash lids, lid decals, and padlocks.

Model RA2/G-PW 2-module recycling array, brown recycled plastic post and slats. Shown with optional Model TG-24 galvanized steel recycling lids and lid decals.

Recycling Arrays — RA Series Provide a focal point for recycling and trash collection


- Recycling Arrays use the TRH-32 Trash Receptacle Holder as the basic module. See Page 58.
- · Recycling Arrays come in three configurations, all with a center anchor post.

1-Module: Model RA1/G-P♦ uses a single TRH-32 receptacle. □



2-Module: Model RA2/G-P♦ uses two TRH-32 receptacles.





- The 4" x 4" (nom.) sq. center post of recycled plastic is the array focal point and is embedded into a concrete footing to secure the array in place. Modules bolt to the center post (and to each other for the 3-module array). Provided ground anchors, driven through holes in the base frame rings, can additionally anchor and secure the array structure.
 - Each module includes galvanized steel frame rings and 1" x 4" (nom.) slats of 100% recycled plastic. See Page 53 for colors (replace "♦" with letters indicating color choice).
 - Optional: Model TG-24 Recycling Lids can be used to collect a variety of recyclables. Our recycling decals let you identify what each module is used for (see Page 68).
 - Optional: Other trash can covers and dome lids can also be used to add to the versatility of the array. See Pages 64-67.
 - Optional: Complete the Array with a selection of metal or plastic liners. See Page 69.
 - Optional: Band-It trash bag loop to hold your trash bag in place. See Page 68.





A wide variety of plastic or steel dome and flat lids is available. Add recycling decals to equip your Recycling Array to collect recyclables or trash or both at the same time.







Model RA3/G-PC 3-module recycling array in cedar colored plastic with optional **Model** CN-PD/N-24PC green recycling lids. Also shown is optional engraved letters with green resin fill (see Page 26).

KOLORCANS

- Two shapes. Two sizes.
- ROUND with dome top, 42 gal. capacity.
- SQUARE with square top, 32 gal. capacity.
- Complete set: includes outer base, top and inside liner.
- Rotationally molded polyethylene plastic has solid color molded in. Won't fade, dent or chip. Durable, heavy weight material. Round unit weighs 36 lbs., square shape weighs 29 lbs. Made in USA with recycled plastic and is 100% recyclable.
- Four molded in handles for easy use. Maintenance free plastic door hinge. Self-closing door fits tightly to keep insects out. Not affected by wind.
- Signage outer base unit includes flat panels where you can apply your signage (not included).
- 8 BOLD Solid Colors: Blue, Green, Brown, Black, Red, Yellow, Orange, White. Base and top are same color.

Round Receptacle Model Number	Square Receptacle Model Number
Dome Top (Waste)	Square Top (Waste)
CN-S7101A/◆	CN-S7801A/◆

Replace (*) in Model No. with letter indicating color choice. SOLID COLORS: Blue (U), Green (N), Brown (W), Black (B), Red (R), Yellow (Y), Orange (O), White (H):



Model CN-S7801A/R square receptacle in red color.



Model CN-S7801A/U square receptacle in blue color

Steel Receptacle with Rain

Bonnet and Lockable Door

Model CN-S7101A/Y round receptacle in yellow color.

Model CN-S7101A/N round

receptacle in green color.

- Model CN-R/SP3/CB-36D steel strap receptacle includes a side open door for easy access to remove and empty the liner inside.
- Designed with steel "rain bonnet" to cover recepatacle and optional liner.
- Fabricated using 1/8" thick 10 ga laser cut steel sheet. The base includes holes for surface anchor points (anchors not included). Welded into a single unit. No assembly required.
- Includes locking mechanism and key to prevent theft/vandalism.
- Includes (4) threaded adjustable levelers located equally around the base.
- Powder coat finish in your choice of colors. See Page 50.
- Optional: Steel or rigid plastic liners. See Page 69.
- Optional: ANC2-4 set of (4) 3/8" x 5" concrete surface screw anchors. See Page 121.






Same receptacle with door open. Shown with CN/B-1827 rigid plastic liner.

Pilot Rock WASTE & RECYCLING

Tilting Trash Receptacle

Collection basket is suspended off the ground for easier grounds area maintenance and unloading.

- Perforated steel basket has approximate 52 gallon capacity. Use your disposable garbage bags inside. No separate liner required.
- Support yoke is single piece 2-3/8" OD steel pipe. Twin pedestal support can withstand public exposure. The basket is suspended about 13" off the ground surface for convenient access for the public and maintenance crew.
- · No heavy vertical lifting! Basket weight is supported by the yoke. Just tip it forward and remove the trash bag. The 60-degree tilt makes it easy to slide the trash bag out.
- · Durable, commercial grade spring-loaded pin holds the basket in the vertical collection position and in the tilted unloading position. Easy one person operation.
- · The solid band around basket provides a visible area for custom signage cut into the basket or use adhesive vinyl decals.
- The yoke framework is powder coated. The perforated basket is thermo-plastic coated. Matching colors are standard. For color choices see Pages 50 & 52.
- Standard: Embedded post installation Model CN-TR-52.
- Optional: Surface mount bolt down base plate Model CN-TR/P-52 (includes two sets #ANC1-4 concrete anchor bolts).
- Optional: Band-It trash bag loop to hold your trash bag in the basket. See Page 68.
- Optional: Your choice of plastic or steel trash or recycling lids. See Pages 64-67.
- Optional: #CN/B-1827 rigid plastic liner, 36 gal. See Page 69.
- Optional: 2-part aluminum cover caps for Model CN-TR-52 with embedded post installation. See Page 27.



Model CN-TR/P/CY-52RR Tilting Trash Receptacle, yellow powder coat frame finish and red thermo-plastic coat basket finish, with optional bolt down base plate installation, with optional Model CN/Y-4455 yellow plastic dome lid. Shown with optional custom lettering in basket.





Model CN-TR/CR-52RR Tilting Trash Receptacle, red powder coat frame finish and red thermo-plastic coat basket finish. Shown with optional Model CN-SDR/B-24 black plastic dome lid. Illustrated with standard embedded post installation.



Model CN-TR/CN-52RN Tilting Trash Receptacle, green powder coat frame finish and green thermo-plastic coat basket finish, shown with optional Model CN-PD/N-24 green plastic dome lid. Shown in locked vertical position for collecting trash. Provide your own disposable trash bag liner.



Model CN-TR/P/CN-52RN Tilting Trash Receptacle, green powder coat frame finish and green thermo-plastic coat basket finish, with optional bolt down base plate installation, shown with lid removed and locked at 60 degree tilt position for easy trash bag removal.

Pilot Rock Pet Waste Collection Station

The complete Pilot Rock Pet Waste Station Model PWS-D006 includes:

Steel post, sign and sign bracket, aluminum bag dispenser, aluminum waste can, 50 waste can liner bags, 400 waste collection bags, all assembly hardware and instructions. Station installed is 72 in. tall, 14 in. wide.

Reorder Bags: You will want to keep both bags on hand for quick refills.

Pet Waste Roll Bags:

Fits any dispenser. Size: 8" wide, 13" long. 200 bags per boxed roll. 10 boxes per case. Case weight = 14 lbs. Order Case #PWS-D001

Waste Can Liner Bags:

Part Number

PWS-D006

PWS-D003

PWS-D001

PWS-D002

PWS-D004

PWS-D008

PWS-D022

PWS-D019

PWS-D021

PWS-D999

1.55 mil. Size: 27.5" wide, 29" long, black, 50 bags per box, 4 boxes per case.

Case weight = 19 lbs. Order Case #PWS-D002



(a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	200	A B	⊘ AGS
S	⊙50	ENTRA FRIENDLY OF TRASH CAR LINES	

Sign: #PWS-D008

10 in. wide, 12 in. tall, aluminum, white/forest green powder coat finish.

Bag Dispenser:

#PWS-D003 No rust aluminum fabrication with forest green powder coat finish, screen printed signage, lockable, three dispensing openings to hold three 200 count boxes of bags, plus room to store two extra boxes of bags, 1000 bag total capacity.

Steel Post:

Two-section solid steel, 1 in. standard hole spacing, forest green finish, 84 in. assembled length, tapered end for easy installation.

Waste Can:

#PWS-D004 No rust aluminum fabrication with forest green powder coat finish, self closing lid, 11 gallon capacity, built in clamps hold liners in place.



please clean up after your dog

DogiPot® — Pet Waste Collection System

The DogiPot® light weight, polyethylene pet waste removal stations are built to commercial quality standards for use everywhere dogs and their owners go.

The complete DogiPot® **Pet Waste Station includes:**

Description

Complete Pet Waste Station

Pet Waste Roll Bag Dispenser Only

Pet Waste Bags on a Roll Case: 10 Boxes, 200 bags per box

Waste Can Liner Bags Case: 4 boxes, 50 bags per box

Waste Can Only

Sign (Replacement)

Optional Waste Station (Not Shown)

Complete Pet Waste Station - Bags On A Card

Bags On A Card Dispenser only

Bags On A Card Refill, 9 1/2" W x 15" L,1 case = 3200 bags MittN Bags On A Card Refill, 8" W x 12-1/2" L with 5" mitten pouch,

1 case = 2,000 bags. Will fit all bags-on-card header dispensers.

- Junior Bag Dispenser (400 litter bag storage capacity). Forest green color.
- Two rolls (200 bags each) of opaque green litter pick up bags.
- Trash Receptacle with Lid, 10 gallon size. Forest green color.
- One box (50 count) heavy duty liner
- Signage: 18" x 12" aluminum Pet Waste sign, plus instruction signage.
- Fiberglass 4' to 8' telescoping mounting post. Assembly and mounting instructions.
- · Order the Complete Pet Waste Station, Model PWS-DOGI1010.

- For areas where you have your own trash receptacles you can install just the litter bag dispenser. Pet owners can take a bag, use it as they exercise their pet, and dispose of it in the nearest trash receptacle.
- Order the DogiPot® Junior Bag Dispenser PWS-DOGI1007-2 Model (includes two rolls of 200 bags each).

Order bag refills:

Model PWS-DOGI1402-10

Litter Pick Up Bags, 8" x 13" long, opaque green. 200 bags per box. Minimum order one case of ten boxes (2000 bags).

Model PWS-DOGI1404

Receptacle Liner Bags, 10 gal., opaque black, draw tape close, box of 50 bags.





Pilot Rock Dog Park Products



Playgrounds For Dogs™



MODEL DPE-DOGI7522 Dogi-Jump Hoops

- Dog shaped, 3-level hoops, 22.5" ID.
- Welded steel component fabrication with Green thermoplastic coating.
- (2) in-ground mounting posts with powder coat finish.
- Can be surface mounted. Anchor bolts not included.
- Dimensions (installed): 80" wide x 42" tall. Weight: 80 lbs.

MODEL DPE-DOGI7731 Fire Hydrant

- · Decorative fire hydrant is molded with unsaturated poly resin.
- · Coated with Red poly urethane paint to seal out urine.
- (4) in-ground mounting j-rods are powder coated Red.
- · Can be surface mounted. Anchor bolts not included.
- Dimensions (installed): 33" high x 15" wide.
- · Weight: 29 lbs.



MODEL DPE-DOGI7523 3-Level Steel Jump Hurdles



- (3) hurdles, 11 ga. x 3" OD steel tube.
- Textured powder coat finish: (2) green, (1) beige.
- (6) in-ground mounting posts with powder coat finish.
- Dimensions (installed): **#1:** 41" wide x 6" high; **#2:** 48" wide x 12" high; #3: 55" wide x 18" high.
- · Weight: 90 lbs.

MODEL DPE-DOGI7511 Rectangular **Bone Table**

- Table is 11 ga. steel with perforated bone-shape artwork, with Green Ruffcoat™ protective slip resistant coating.
- (4) legs are 13 ga. 4x4 in. square steel tube, with beige powder coat finish.
- (4) in-ground mounting posts with powder coat finish.
- Dimensions (installed): 60" long x 24" wide x 12" high.
- · Weight: 135 lbs.
- Holds up to 500 lbs. maximum.

MODEL DPE-DOGI7531 Dogi-Tunnel



- · Aluminum tunnel is 36" ID x 46". long, with Green powder coat finish.
- (4) legs are 2" square steel tube with Beige powder coat finish.
- (4) in-ground mounting posts have powder coat finish.
- Dimensions (installed): 59" tall (at tail) x 44.5" wide x 46" long; 9" high at bottom of tunnel.
- Includes (1) tail and (2) ears.
- · Weight: 210 lbs.

MODEL DPE-DOGI7521 Arched Stepping Bones





- (5) Steps are 12" x 16" wide, 11 ga steel with bone-shape artwork punched into each step.
- Steps are 12", 18" and 24" high and have Green Ruffcoat™ protective, slip resistant coating.
- 13 ga. 2.375" square steel tube framework with Beige powder
- (3) in-ground mounting posts with powder coat finish.
- Can be surface mounted. Anchor bolts not included.
- Dimensions (installed): 84" wide x 16" deep x 24" tall.
- · Weight: 155 lbs.
- Holds up to 200 lbs. maximum weight.

Products include in-ground mounting hardware. Follow manufacturer's installation instructions. All products must be securely installed in-ground or surface mounted to concrete (using your own hardware). This equipment is not intended for use by people. This equipment is solely intended and designed for dog use only. Warranty provided by Dogi-Pot: (2) years on fabrication, (5) years on Ruffcoat™ and thermoplastic coating. Made in the USA. DogiPot, Ruffcoat and "Playgrounds For Dogs" are trademarks of the DogiPot Company.

Dog Park Products . . . For People

Outfit your dog park with durable and comfortable site amenities for the people the dogs bring along. Many of our products can include custom artwork or signage. Here are just a few examples . . .




Model T214/G-4RR portable, blue powder coated steel frames, 4 ft. round table, perforated steel seats and top with dog paw art, thermoplastic coated in red color. See Page 42 for more details.

Picnic Tables are a great addition to any dog playground site. Perforated Steel picnic tables . . . rectangular, square and round . . . can include your preferred dog art (within the limits of material, perforating process, and size). Contact us for more details.





Plenty of seating is always a necessity at any dog park. Our Park Benches offer many possibilities for dog parks. We can include custom art, plaques or signage in cut steel plate, perforated steel, recycled plastic and our Sign Bench.



Model PCXB/CW-6HU12 portable/surface mount bench, brown powder coated steel frames, 6 ft., perforated steel seat and back with brown thermoplastic coating, custom artwork in backrest. See Pages 8-9 for more details.



Model B78/CA-6SP/TR has custom art laser cut in

the steel contour seat, shown with gray powder

There is never a shortage of waste in a dog playground site. To keep your dog park clean you will need Trash Receptacles. We have many to choose from, offering a selection of sizes, materials, colors and lids. Here are two that easily accommodate dog park art.



Model CN-TR/CU-52RY elevated tilting trash receptacle, blue powder coated support yoke, 52 gallon perforated steel trash basket with yellow thermoplastic coating, custom artwork. Shown with optional trash collection lid.

See Page 74 for more details.

Check out our Pet Waste Stations and Products! See Page 75

Model CN-R/RA-32 trash receptacle, perforated steel with custom artwork, gray thermoplastic coating, 32 gallon capacity. Shown with optional liner and Model T/CB-2410R lid. See Page 56 for more details.



Pilot Rock Shi = ANN = A

Certified Bear Resistant Food Storage Lockers

These Food Storage Lockers have been designed ... and tested ... to keep bears out. The un-bear-able features include:

Construction: The top, sides and door panels are all fabricated using heavy 12 ga. steel plate. The bottom panel is 12 ga. pre-galvanized steel. The corner braces/leg posts are 12 ga. steel formed channels nested inside the formed channel side panel wraps. This design assembly creates strength and rigidity for the box. All welded assembly. Only the galvanized bottom panel is bolted in.

> BEAR Committee

Hooks cut into top support

channel inside the locker

hold bags for access and

Door Features: Full swing doors ride on heavy gauge, stainless steel, full-length piano hinges. Doors included 2-4 latch points for extra security. The latch door is reinforced with a steel angle. The doors can be opened with one hand and comply with ADA guidelines for reach and operability. Doors are easy to swing closed. For safety, the door latch can be disengaged from inside.



Model BPFL/CNT-30 Bear Resistant Food Locker with textured green powder coat finish. 30 cu. ft capacity.

- Four leveling feet so you can adjust for an uneven surface.
- Set of four 1/2" x 5" concrete screw anchors (#ANC5-4).
- Locker Ceiling is reinforced with formed steel channel that includes hooks for hanging packages of dry goods.
- Wide doors provide easy access for large coolers.
- Room inside the locker to open the cooler lid without lifting it out.
- Air louvers in back panel provide ventilation but restrict insect access.
- Two like size units can be stacked to provide double the storage capacity on less space.
- Doors can be locked closed. Padlock not included.
- Optional: "Food Storage" decal #DE-36/2.
- Finish: Textured powder coat finish available in five colors: brown (/CWT), green (/CNT), black (/CBT), speckled tan (/CTT) and blue (/CUT). See Page 50.
- Pre-galvanized steel bottom panel is not painted.



Two Model BPFL/CUT-15 Bear Resistant Food Lockers with textured blue powder coat finish stacked to save space with a smaller footprint. 15 cu. ft capacity each for a total of 30 cu. ft. Turn them in opposite directions to serve two campsites.



Model BPFL/CWT-25 Bear Resistant Food Locker with textured brown powder coat finish. 25 cu. ft capacity. No need to lift heavy coolers out of the locker - open cooler lids inside.

Model	IGBC Cert. No.	Inside Capacity (Cu. Ft.)	Number of Doors	Latch Points per Door	Locker Box Outside Dimensions HxWxD (in.)	Overall Height (in.) (levelers retracted)	Anchor Kit Included
BPFL/♦-15	5104	15	1	2	33 x 26 x 34-1/2		
BPFL/♦-25	5123	25	2	2	33 x 47-3/4 x 30-1/2	40.0/0	
BPFL/♦-30	5105	30	2	2	33 x 47-3/4 x 37-1/2	40-3/8	ANC5-4
BPFL-D/♦-30	5258	15 (per compartment)	2	2	33 x 49-3/8 x 37-1/2		
BPFL-T/♦-18	5263	9 (per compartment)	2	1	41-3/4 x 25-3/4 x 35-3/4	58	

Replace "\u2224" with letters indicating color choice; Brown (CWT), Green (CNT), Black (CBT), Blue (CUT), Speckled Tan (CTT).

SITE AMENITIES

Pilot Rock

BPFL-D Food Locker with Center Wall

- Optional: Model BPFL-30 food locker can be equipped with a center dividing wall which creates two equal 15 cu. ft. compartments, creating Model BPFL-D-30.
- Each compartment has its own door with latch and two latch points.
- Each door can be padlocked closed separately. Padlock not included.
- Optional: "Food Storage" decal #DE-36/2.



BPFL Embedded Post Mount

Optional installation method for BPFL Food Lockers



- Alternate Installation for BPFL Food Lockers
- If you don't have a concrete pad to anchor your Food Lockers to, this embedded post installation offers you an alternative.
- 3-1/2 in. OD x 61-/14 in. long post is embedded into a concrete footing (min. recommended 12 in. dia. x 36 in. deep).
- The center back of the Food Locker is attached to this post.
- · All hardware is included.
- The ground surface should be as level as possible.
- · Black paint finish on post.
- NOTE: This installation method has not been tested/certified by the IGBC.
- Not available for the BPFL-T-18 Trail Side Locker.

Model BPFL/CB-POST1 alternate food locker installation method.

Trail Side Locker

Model BPFL-T-18 provides smaller lockers to temporarily store food and other gear you don't want to carry while hiking the trails.

- Two compartments per unit. Each compartment provides 9 cu. ft. of storage (20" H x 25-1/4" W x 32-1/4" D) for a total of 18 cu. ft. large enough to hold backpacks, small coolers and other gear.
- \bullet Individual wide-swing doors with full-length stainless steel piano hinge. Doors measure 18 in. x 21-1/2 in. for easy access.
- One hand operation to open doors. The latch cover prevents access to bears.
- · Each compartment door has its own latch and can be padlocked closed (padlock not included).
- Includes support bases (bolt-on) with leveling feet to adjust for an uneven surface. Each adjustable "foot" has a 3/4" x 2" slot to accommodate different surface conditions and positions for anchoring.



Model BPFL-T/CWT-18 lockers can be mounted side-by-side with included fasteners.

- Locker top, sides, floor and door panels are fabricated using heavy 12 ga. steel plate.
- The bottom compartment floor is 18" above the ground surface and meets the ADA guidelines for reach and operability.
- Includes a set of (4) 1/2" x 5" concrete screw anchors (#ANC5-4).
- Additional 2-compartment lockers can be bolted together sideby-side to create an array of lockers to accommodate your unique requirements. Fasteners included.
- Textured powder coat paint finish is available in five colors: brown (/CWT), green (/CNT), black (/CBT), blue (/CUT), speckled tan (/CTT). See Page 50.
- **Optional:** "Food Storage" decal #DE-36/2.



Optional Food Storage Locker **Decal #DE-36/2** can be used with all BPFL Series lockers. Decal measures approx. 5" x 6". Black on white vinyl



Model BPFL-T/CTT-18 Bear Resistant Trail Side Locker with textured speckled tan powder coat finish, two 9 cu. ft. compartments.

Pilot Rock Shi = S

Lantern Poles... Single, Double, Accessible



Shelf Option: Model LHS/G-1 makes the lantern holder even more functional with a 14" x 20" utility shelf, supported by two gussets welded to the adjustable attachment sleeve. Fits any 2-3/8" OD pole.

Shown: Model LH/G-1/A: Model LH/G-1 lantern holder with welded on Wheelchair Accessible Option an additional lantern arm and hook. This lower position accommodates persons in wheelchairs.

This welded on option is available on all new holders.

> (Add "/A" to the end of any model number.)

Shown: Model LH/G-1 with hot dip galvanized finish.

Model LH-1 features a

90-degree bend and hangs one lantern. Hook is 76" high.

Model LH/G-1:

hot dip galvanized finish. Model LH/CB-1:

black powder coat finish.

Shown: Model LH/G-180 with hot dip galvanized finish. Model LH-180 features a 180-degree bend and hangs one lantern. Hook is 76" high. Model LH/G-180:

hot dip galvanized finish. Model LH/CB-180:

black powder coat finish.

Shown: Model LH/CB-2 with black powder coat finish.

Model LH-2 includes a crossbar with arms curved down at 90 degrees to hang two lanterns. Hooks are 77" high.

Model LH/G-2: hot dip galvanized finish. Model LH/CB-2: black powder coat finish.



Bolt on this arm to any 2-3/8" OD pole in the field to add a lantern hook at a wheelchair height. Order Model LHA/G-1



- Lantern Holders are designed to safely hang camping lanterns. The 2-3/8" OD steel pipe of each Lantern Holder is installed in a concrete footing to provide a strong, vandal resistant support. The lantern hook is fabricated from 1/2" dia. steel bar.
- Lantern Holders feature single piece, welded construction and come standard with a hot dip galvanized finish to minimize maintenance requirements. An optional powder coat finish is available. See Page 50.

SITE AMENITIES

Pilot Rock

Traffic Barrier

- In upright position use the traffic barrier to block traffic to restricted areas.
- Fold it down to allow traffic through.
- Can be securely locked in either position.
- Features: Heavy gauge steel fabrication, 3-1/2" OD x 1/8" wall steel pipe post; 10" sq. x 3/8" steel base plate with four 25/32" dia. holes, four 1/2" x 3" screw type concrete anchors (reorder # ANC1-4), stainless steel bolt and 3/4" dia. pin, brass padlock, high visibility yellow powder coat paint finish, reflective decals.
- Dimensions: Erect height 42-3/8", folded height 4-3/16".
- **Optional:** Powder coat paint finish in choice of colors. *See Page 50.*





Model TB/CY-1 Traffic Barrier will help you block motorized traffic to restricted areas. Shown above in lowered position to allow authorized vehicles to pass.

Bollard Barricade — Control or deter traffic with this imposing bollard post barricade

- 4-1/2" OD x 10 ga. wall steel pipe post stands 41-3/8" tall after installation.
- Two installation methods:
 - Model TB-2 provides standard post to be embedded into concrete footings. Post is open on one end so you can fill it with concrete if desired.
 - **Model TB/P-2** offers optional bolt down surface installation with welded on 3/8" thick x 10" square base plate; 3" dia. hole in this plate allows you to fill post with concrete before installation if desired; includes set of (4) 1/2" x 5" concrete screw anchors (reorder #ANC5-4).
- Yellow powder coat finish is standard. Other colors available. *See Page 50.* Each post includes a set of reflective decals.



Model TB/CY-2 Embedded Mount Bollard Traffic Barricade

Shown:

Model TH-3: Triple Roll Dispenser

Model TH-2: Double Roll Dispenser

Model TH-1: Single Roll Dispenser

with optional Model PL-1 padlock

Toilet Tissue Dispensers

- **Model TH** Toilet Tissue Dispensers are made with sturdy steel wall brackets and cross bars to stand up to abuse. The optional Model PL-1 brass padlock will prevent theft.
- Toilet Tissue Dispensers are available in 3 models to hold from 1 to 3 rolls. See the chart below. **Models TH-1** and **TH-2** use 3/16" thick steel wall brackets and 3/16" x 2" wide cross bar. **Model TH-3** has 3/16" thick wall brackets that span 16" wall stud centers and a 1/4" thick x 2" wide cross bar. Model TH-3 can serve as a paper towel holder.
- The 2- and 3-roll models can be equipped with a 1-1/2" wide cross bar which will allow the tissue rolls to turn easily. Order **Models TH-2F or TH-3F**. See chart below.
- All models have a zinc plated finish. Wall mounting fasteners are not included.

Model No.	Number of Rolls	Cross Bar Dim. (in.)	Feature
TH-1	1	3/16 x 2	D. II
TH-2	2	3/16 x 2	Rolls won't turn easily, prevents waste and
TH-3	3, or 1 roll paper towels	1/4 x 2	extreme use.
TH-2F	2	1/4 x 1-1/2	Rolls turn easily,
TH-3F	3, or 1 roll paper towels	1/4 x 1-1/2	accommodates elderly or disabled persons

Pilot Rock

SITE AMENITIES



Model ULT/B-2 with 18" x 48" work top, single post, standard embedded installation.

Utility Table — ULT Series

- **Model ULT** Utility Tables are a popular enhancement to picnic and camp sites by providing a work area so the nearby picnic table can be kept clean and used for other activities. The table is 32" high (nom). These are popular Dutch Oven or Grill tables.
- Simple design makes the ULT Table convenient to use, easy to keep clean. Rugged construction includes: 3/16" thick steel plate top, steel tube or channel iron leg posts. Finish: high heat black enamel paint. Some assembly required.
- Formed 1-3/4" flanges on all four sides reinforce the top for strength. The side and back flanges are formed up to define the work area, the front flange is formed down to offer a blunt front edge and the back corners are left open for easier clean up.
- Embedded post installation is standard.
- **Optional**: Bolt down steel base plate installation for existing surface (anchor bolts not included, use one or two #ANC1-4 kit). See Page 121.
- These fixed position Utility Tables come in 3 styles:
- Model ULT-1: 18" deep x 30" wide top; single 4" x 6" rectangular steel tube post.
- Model ULT-2: 18" deep x 48" wide top, single 4" x 6" rectangular steel tube post.
- Model ULT-3: 30" deep x 48" wide top, double 6" steel channel posts. Top is reinforced underneath with two 3/16" x 3" x 3" steel angles.





Utility Table with Swivel Top

Model ULT-4 utility table offers these features:

- **Swivel**: 360-degree rotation in either direction with theft proof swivel attachment on 3-1/2" OD steel post. You can compensate for changing light or wind conditions.
- Taller working height: 40" (nom.) installed (still within ADA guidelines).
- **Table dimensions:** 3/16" thick steel plate x 18" deep x 30" wide, with formed flanges on all sides for strength.
- **Table Features:** The formed-up flanges on 3 sides help contain your food and utensils. The front formed-down flange presents a blunt front working side.
- Finish: High heat black enamel paint.
- Standard: Model ULT/B-4 with standard embedded post installation.
- **Optional: Model ULT/P/B-4** with optional surface mount bolt down base plate installation (anchor bolts not included use #ANC1-4 kit). *See Page 121*.





SITE AMENITIES



Full Size Utility Table — APTX Series

A full size serving or prep table

- Model APTX utility tables available in 6 or 8 ft. lengths, 30" (nom.) table top height. These larger utility tables can provide work or prep area for several people at the same time.
- Uses the APT Series picnic table top frame (see Page 44) double pedestal 3" x 6" (nom.) rectangular steel tube frame posts. Standard embedded installation. Optional bolt down base plate available (anchor bolts not included, see Page 121).
- Frame finishes available: hot dip galvanized or powder coat. See Page 50 for colors.
- Top materials available: lumber, aluminum, 100% recycled plastic, or thermo-plastic coated expanded steel, perforated steel, or formed steel channel. See Pages 50-53 for colors.



Utility Table — XTX Series A portable or stationary work table up to 10 ft. long



- **Model XTX** Utility Table is a durable and versatile design variation of our XT Series Picnic Tables (see Page 31).
- Features include: 2-3/8" OD x 11 ga. wall welded steel pipe end frames, 1-5/16" OD diagonal braces, hot dip galvanized frame finish is standard, includes galvanized fasteners. Top is 30" high (nom.).

Available Materials. See Pages 50-53	Lengths (feet)
2x10 Untreated or Pressure Treated Pine	6, 8, 10
Aluminum	6, 8, 10
Thermo-plastic coated, D-Type Expanded Steel, or R-Type Perforated Steel	6, 8, 10
2x10 100% Recycled Plastic	6, 8
Thermo-plastic coated, formed Steel Channel	6, 8

 Wide stance frame with formed and flattened feet provide a stable portable table. The frame feet include 9/16" dia. holes for anchors (not included, see Page 121) for a secure surface bolt down installation.

Condiment Serving Table

Model CST is designed as a concession area table to serve up condiments, utensils and supplies. This allows your concession stand customers to step away from the serving window to prepare their purchase to their own tastes. *See Page 47.*



Pilot Rock | Shi = AMI = Nhi | Shi



Model P-10/G-TP Planter, galvanized steel frame, treated pine slats.



Model P-22/CU Planter, steel strap design with flared top, powder coated blue.

Planters — Add some color and flair to your landscape.

- Model P-10 Series Planters match our round TRH Series trash and recycling receptacles. See Page 58. Top and bottom steel frame rings can be galvanized or powder coated in your color choice. The slats are 2" x 4" (nom.) available in treated pine or colorful 100% recycled plastic. See Pages 51 & 53. Assembly is required. Dimensions: 25" tall x 26-1/2" OD (nom.). A heavy duty rigid plastic liner is included. Match with wood and plastic benches on Pages 11-12.
- Model P-20 Series Planters offer two designs:
- Model P-22 Planter is designed to coordinate with the round CN-R/SS2-36 steel strap trash receptacle. See Page 56. Features include: all steel and all welded fabrication, attractive flare top, and a durable powder coat finish in your color choice. See Page 50. Ships fully assembled. Dimensions: 23" tall x 29" OD (nom.). Includes four leveling feet. A heavy duty rigid plastic liner is included. Match with steel strap benches on Pages 20-21.
- Model P-23 Planter is designed to coordinate with the round CN-R/SS3-36 steel strap trash receptacle. See Page 63. Features include: all steel and all welded fabrication, new die formed wavy vertical straps, and a durable thermo plastic coat finish in your color choice. Pages 51-52. Ships fully assembled. Dimensions: 25-1/2" tall x 29" OD. Includes four leveling feet. A heavy duty rigid plastic liner is included.
- All planters include this 20" tall x 20" (nom.) diameter heavy duty rigid plastic liner, black color only. Order Model CN/B-3001F or replacement.



Model P-10/G-PY Planter, galvanized steel frame, yellow recycled plastic slats.



Model P-23/TN Planter, wave steel strap design, thermo-plastic coated green.

Complete your outdoor space with coordinated products.





CUSTOM BANNERS

Durable vinyl banners are a great way to promote special events. We use 15 oz. nylon webbed vinyl in bright white to really make your custom graphics pop. Use your custom banner inside or outside, at trade shows, public and seasonal events, ceremonies, concerts, sales promotions and ...well, it's up to you. These banners are economical so you can afford to change them often, but they are durable so you can use and reuse them many times. Our price includes digital printing of your custom graphics, and grommets to hang and secure your banner. Standard sizes are 36" wide x 72" or 96" or 120" long, and 48" wide x 72" or 96 or 120" long. Custom sizes are also available.





ENGRAVED SIGN POSTS & RECYCLED PLASTIC

These square sign posts are molded from 100% recycled plastic and available in any of our standard colors. See Page 53. Use them for information along trails and golf courses. They create a simple, durable sign that will never rust or rot. Engraved letters with contrasting colored resin fill make your message visible and attractive. Some emblems and images can be engraved, too. Sign posts come in two sizes: 4" x 4" nom. (5, 6 or 8 ft. lengths), and 6" x 6" nom. (8 ft. only). But don't limit yourself to engraved sign posts! We can also provide custom messages on plastic planks for benches, trash receptacles and more. Be creative. See Page 26 for additional details.





CUSTOM DECALS & PLAQUES

Custom decals and plaques are a great way to recognize a donor, memorialize a loved one, promote an organization, or identify ownership. We offer a variety of custom plaques in two materials: **Cast metal plaques** can be round or rectangular, come in several colors, and can include detailed laser engraving; or **Laminated plaques** are a 3-ply plastic in your choice of surface and core colors, and can include a photo. **Custom decals** can be printed to your design specifications and lend themselves to many applications from park equipment to vehicles to ...well, you decide. Size and shape and color are up to you. See Pages 26-27 for additional details.



Wayfinding and Informational Signs

- Square sign material is .120" thick with laminated white aluminum on both surfaces and a solid black polyethylene core.
- · Vinyl is 3M brand high performance vinyl with a 7-year warranty.
- · Sign image is on one side only. Sign vinyl is available in 3 colors: brown, green and blue. Sign background colors will be white. Type will be reversed on sign.
- Three sign sizes: 3" or 9" or 12" square.
- Two mounting holes: 3" sign has two 3/16" dia. screw holes; 9" and 12" signs have two 3/8" bolt holes. Fasteners are not included.




BUY LOCAL BURN LOCAL DO NOT TRANSPORT **FIREWOOD**



3" Square SN-M/W3-### SN-M/N3-### SN-M/U3-### SN-M/U9-### SN-M/U9-### SN-M/U9-###	Posts Available	
9" Square SN-M/W9-### SN-M/N9-### SN-M/U9-###		
	SN-PP44 Only	
	SN-PFC-8,	
12" Square SN-M/W12-### SN-M/N12-### SN-M/U12-###	SN-PSO-8, SN-PP44, or SN-PP66	

Replace "###" in part number with Symbol number of choice.

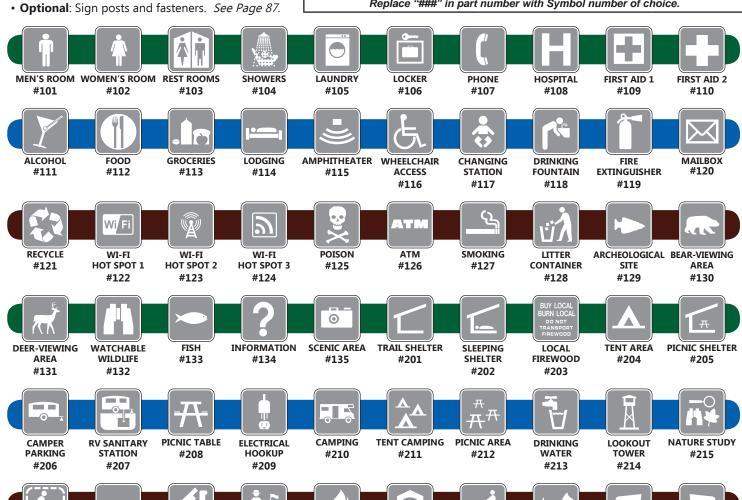





RANGER STATION























PEDESTRIAN



BUS STOP

#301



#302

DIRECTIONAL ARROW #303

LEFT OR RIGHT ARROW #304

UP OR DOWN ARROW #305

WARNING CAUTION #306

TRUCKS #307

AUTOMOBILES #308


CROSSING #309

#310

#311

SIGNS



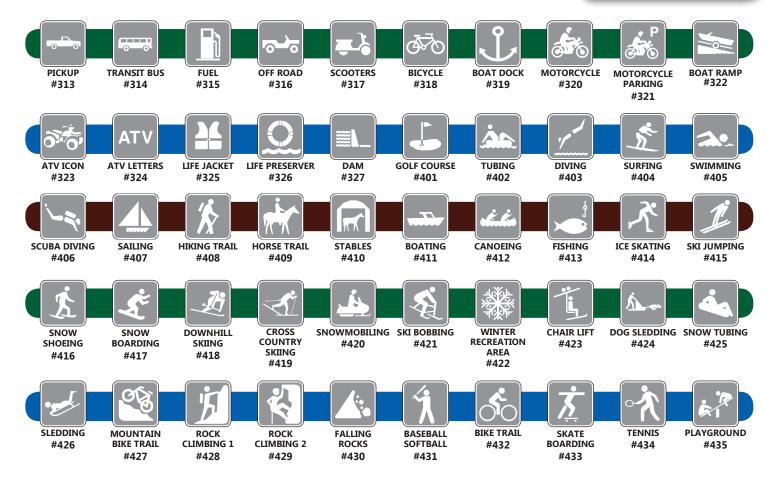





Add the "NO" icon to any sign —



Example: #323

services that are not available.

to show activities and



Example: #323X

Don't see the sign you need? Contact us!

Need A Post For Your Sign?

We offer four types of posts for your marker signs -4" x 4" or 6" x 6" square 100% recycled plastic posts, fiberglass or steel posts. Refer to this chart for post details and sign sizes.


MODEL	DESCRIPTION	WT. (lbs.)	Signs Available
SN-PP44	Recycled plastic 4" x 4" (nom.) square, can be 5, 6, or 8 ft. long. Specify length and color <i>(see Page 53)</i> .	22 (5') 27 (6') 36 (8')	3, 9, and 12 in. square signs
SN-PP66	Recycled plastic 6" x 6" (nom.) square, 8 ft. long. Specify color <i>(see Page 53)</i> .	78	9 and 12 in.
SN-PFC/N-8	N-PFC/N-8 Fiberglass, closed channel, green color, 8 ft.		square signs only
SN-PSO/N-8	Steel, open channel, green baked on enamel, 8 ft.	16	
#900-077	Fastener Package for Steel and Fiberglass Post, set of (8) 5/16" x 2-1/2" zinc plated slotted machine screw with nut.	1	



(Left) **Model SN-PFC/N-8** fiberglass closed channel post. (Right) **Model SN-PSO/N-8** steel open channel post.

PARKING

Safety Bicycle Rack

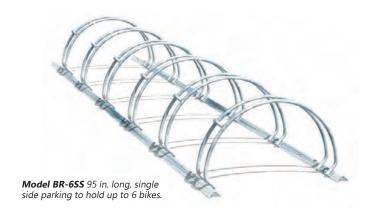





Model BR-12DS 95 in. long, double side parking to hold up to 12 bikes.

- The Safety Bicycle Rack is designed with gently curved arches. The base angles face down to eliminate any vertical edges.
- With a 2-1/4" inside stall width this rack will accommodate bikes in a wide variety of sizes. Models are available in single-side (to fit adjacent to walls) and double-side styles (to hold bikes on both sides). Both styles can be ganged together on the ends to supply the needed amount of parking. Bikes are parked on 16" centers per side.

MODEL NO.	NO. OF BIKES	SIDES OPEN	L X W X H (INCHES)	ANCHORS
BR-6DS	6	DOUBLE	48 x 20-1/4 x 12	BR-4HSA
BR-6SS	6	SINGLE	95 x 20-1/4 x 12	See Page
BR-12DS	12	DOUBLE	95 x 20-1/4 x 12	121.

- Construction: welded, fully assembled hoops of 1/2" diameter steel bar, 1/8" x 1-1/4" x 1-1/4" formed steel base angles, and hot dip galvanized finish for maximum protection from weather and bikes. Zinc plated fasteners included.
- All assembly fasteners are pointed towards the ground with nuts concealed from view inside base angle to deter theft. Shipped unassembled.
- Optional: Model BR-4HSA set of (4) 3/8" x 1-7/8" hex sleeve anchors to secure bike rack to concrete surface.






Single Sided Bike Rack

Double Sided Bike Rack

Omega Bike Rack

- The Omega Bike Rack provides secure parking with classical styling.
- Each Omega Rack will hold up to 2 bikes of any size and style. All popular types of locking devices may be used.
- Available with hot dip galvanized finish for maximum protection, or with a powder coat finish in your choice of colors. See Page 50.
- The Omega can be installed individually or in groups. It lends itself to many creative landscape patterns.
- Dimensions: 32" tall at center, 36-3/4" wide at center. Fabricated using 1.90" steel pipe.
- Surface mount installation (anchor bolts, not included).
- **Optional**: Model ANC3-6 set of (6) 3/8" dia. x 3" heavy duty screw anchors for concrete surface.






Model ORP/CU bike rack, powder coat blue finish.



embedded post installation.

Hitching Post Bike Rack

- The Hitching Post Bike Rack is constructed from heavy 2-3/8" OD steel pipe and features a hot dip galvanized finish for maximum protection from weather and bikes.
- Each single Hitching Post will hold up to 2 bicycles of any style. Bikes can be secured at the front wheel, back wheel or frame. Most types of securing devices may be used.
- Two installation methods are available (see below). Model HRE/G has a longer leg for embedment into concrete footings. Model HRP/G is surface mounted with bolt down base plates (3/8" dia. anchor bolts not included).
- Optional: Powder coat finish. See Page 50.
- **Optional:** Thermo-plastic coat finish. See Pages 51-52. Not available with sign plate.
- Optional: Model ANC3-4 set of (4) 3/8" dia. x 3" heavy duty screw anchors for concrete surface. See Page 121.
- Optional: Welded in steel plate for your custom signage (add "S" to model number). See Page 85.





Model HRPS/CR bike rack with optional signage plate, powder coated red.

Two Installation Choices

Model HRE racks have extended legs for embedding into concrete footings.

Optional: 2-part aluminum cover caps are available for each leg. Add /C to model number.

Model HRP racks are surface mounted by means of a bolt down base plate for use with two 3/8" anchor bolts (bolts not included). 2-part aluminum, cover caps are included.

NOTE: COVER CAP WILL MATCH BIKE RACK COLOR

Hitching Post Group Rack

- Group the single racks together to create parking for 6 to 8 bikes.
- Features: Welded on base plates bolt to base channel, carriage bolt fasteners with nut under channel for a secure assembly, formed steel base channel is 1" x 4" (nom.) x 10 ga., holes in base channel for surface anchors, hot dip galvanized finish on all components is standard.
- Two sizes:

Model HRP-6 will park up to 6 bikes (66 in. long). Model HRP-8 will park up to 8 bikes (96 in. long).

NO.



Model HRP/CY-8 Group Rack, powder coated yellow, holds eight bikes.

MODEL NO. **OF BIKES METHOD HRE** 2 Embedded 29-3/8 NA NA ANC3-4 **HRP** 2 Surface Mount 33 NA (4) 3/8" X 3" ANC2-4 HRP-6 6 Surface Mount 66 (4) 3/8" X 5" 31-1/4 ANC2-6 HRP-8 8 Surface Mount 96 (6) 3/8" X 5"

INSTALL

See Page 50. • **Optional:** Concrete screw anchors. See chart at left. See Page 121.

• Optional: Powder coat finish.

PARKING



Model BR205SS/G single sided hot dip galvanized bike rack with "D" style end frames. Holds five bicycles.



Model BR210DS/G double sided hot dip galvanized bike rack with "Bell" style end frames. Holds ten bicycles.

Versatile Vertical Bike Rack

- Tall vertical stalls hold the front or back bike tire secure.
- The end frames and cross tube structures are fabricated using 1.66" OD x 10 ga. wall steel tube; the vertical stall bars are 5/8" OD steel bar (not hollow tube). All welded component fabrication. Stall structure bolts to end frames so racks ship flat to reduce freight and handling costs.
- Using the same stall structure, with interchangeable end frames, a variety of bike racks can be built offering you choices of design and parking capacity.
- Single-sided racks will hold from 5 to 10 bikes. Double-sided racks will park from 10 to 20 bikes. See chart below.
- Double the parking capacity of a basic bike rack by adding an identical set of stalls. A matching center frame joins the stall sections together.
- Choose a finish. All rack designs are available with a powder coated paint finish in your choice of colors. *See Page 50.* A hot dip galvanized finish is available on some models. See chart below.
- These versatile bike racks will hold all types of bikes and most locking devices can be used.
- **Optional**: Order a set of 4 or 6 heavy-duty screw anchors to secure your bike rack to a concrete surface. See chart below.



double sided bike rack with "Wheel" style end frames. Blue powder coat finish. Holds ten bicycles.

Model BR220DS/CN double sided bike rack with "Bell" style end frames. Green powder coat finish. Showing extension which doubles the parking capacity. Holds twenty bikes.


End Frame	Model No.	No. of	Sides	Available	e Finish*	Drofile & No. of So	Profile & No. of Sections		Optional H.D. Anchor
Style	wiodei No.	Bikes	Open	Hot Dip Galv.	Powder Coat	Profile & No. of Se	ctions	(in inches)	Kit for Concrete
	BR205SS/♦	5	Single Side	Yes (/G)			(1)	76 x 23 x 33	#ANC2-4 (4) 3/8" x 5"
"D"	BR210SS/♦	10	Single Side	Yes (/G)	Yes		(2)	150 x 23 x 33	#ANC2-4 (4) 3/8" x 5"
	BR210DS/♦	10	Double Side	Yes (/G)	Available with powder coat		(1)	76 x 46 x 33	#ANC2-4 (4) 3/8" x 5"
"Bell"	BR220DS/♦	20	Double Side	Yes (/G)	finish. See Page 50 for color		(2)	150 x 46 x 33	#ANC2-6 (6) 3/8" x 5"
	BR310DS/◆	10	Double Side	No	choices		(1)	80 x 33 x 33	#ANC3-4 (4) 3/8" x 3"
"Wheel"	BR320DS/*	20	Double Side	No			(2)	153 x 33 x 33	#ANC3-6 (6) 3/8" x 3"
	*Rep	olace (♦) i	n Model r	number with finish	designation, e.g.	BR205SS/G. <i>See Pag</i>	e 50 for p	owder coat cold	ors.



Model SRP/G-5/C bike rack, surface mount installation with base plate, includes cover caps, will park up to 5 bikes.

Saddleback Bike Rack

- The Saddleback Bike Rack incorporates a graceful, continuous loop design. It will accommodate all types of bikes and all popular locking devices.
- The Saddleback Rack is formed using heavy gauge 2-3/8" OD Schl. 40 steel pipe, and offers a hot dip galvanized finish for maximum protection from weather and bikes.
- This rack can mount a bicycle at each end, plus a bike in each ascending or descending loop. Models are available to park from 3 to 13 bikes. Model SRE/G has a longer leg for embedment into concrete footings. Model SRP/G is surface mounted with bolt down base plates (3/8" dia. anchor bolts not included).
- Optional: Powder coat finish. See Page 50.
- Optional: Model ANC3-4 set of (4) 3/8" dia. x 3" heavy duty screw anchors for concrete surface. Model SRP/G-13 requires anchor kit ANC3-6. See Page 121.



	1 2 3	1 2 3 4 5	1 2 3 4 5 6 7	1 2 3 4 5 6 7 8 9	1 2 3 4 5 6 7 8 9 10 11	1 2 3 4 5 6 7 8 9 10 11 12 13
# of Bikes	3	5	7	9	11	13
Length (nom.)	14"	38"	62"	86"	110"	134"
Embedded Models	SRE/G-3	SRE/G-5	SRE/G-7	SRE/G-9	SRE/G-11	SRE/G-13
Base Plate Models	SRP/G-3	SRP/G-5	SRP/G-7	SRP/G-9	SRP/G-11	SRP/G-13

*Note: Saddleback Bicycle Racks feature a nominal 12" center to center between loops. Listed lengths are nominal and may vary due to bending tolerances.




Model SRE racks have extended legs for embedding into concrete footings.

Optional: 2-part aluminum cover caps are available for each leg. Add /C to model number.

Two Installation Choices

Model SRP racks are surface mounted by means of a bolt down base plate for use with two 3/8" anchor bolts (bolts not included). 2-part aluminum cover caps are included.



NOTE: COVER CAPS CAN BE POWDER COATED TO MATCH BIKE RACK FINISH.



Model BR20/TR Hoop Rack, red thermo-plastic coat finish.

- Model BR20 Hoop Bike Rack provides secure parking for two bikes of any size and style. All popular locking devices may be used.
- The Hoop Rack can be installed singly or in groups. Surface mount installation only (anchor bolts not included).
- Finished with thermo-plastic coating in your choice of colors. See Pages 51-52.
- **Dimensions:** 29" diameter x 34" tall. Fabricated using 1/4". thick x 2-1/2" steel plate, with a 1/4" x 8" sq. steel base plate.
- **Optional**: Model ANC1-4 set of (4) 1/2" dia. x 3" heavy duty screw anchors for concrete surface. *See Page 121.*



PARKING

Steel Wheels Bike Rack



- The bicycle shape is something everyone will recognize for bike parking. Each rack can support the bicycle in two places. Most types of locking devices may be used.
- Both bike racks use 1.66 inch OD x 10 ga. wall steel tube for the bike shapes. Fully welded assembly.
- Powder coat finish available in choice of colors. *See Page 50.*
- Surface mount installation only, with 3/16inch thick steel angles welded to each wheel, providing 8 anchor points per rack for a stable and secure location.
- **Optional:** Order (2) #ANC1-4 sets of (4) 1/2-inch x 3-inch concrete screw anchors. *See Page 121.*





Model BR30/CN bike rack with Green powder coat finish.



Model BR30 will park 2 bikes.



Model BR31/CY bike rack with Yellow powder coat finish.



Model BR31 will park 2-4 bikes.

		Model Number	Number of Bikes	Finish	Dimensions H x W (inches)	Installation	Optional Anchor Kit
		BR30/ ♦	2	Powder Coated	41 x 50	Surface Mount. (8) anchors required per rack (not in-	Order (2) #ANC1-4 sets of (4) 1/2" x 3"
		BR31/ ♦	2-4	See Page 50	45 x 76	cluded). 9/16" dia. mounting holes	concrete screw anchors See Page 121
ĺ	Replace (♦) in Model Number with Powder Coat Finish color choice initials. See Page 50.						



- Single post "bollard" type bike rack, with parking for 2, 4, or 6 bikes of any style. Will work with most bike locking devices.
- Dimensions: 35" tall, 28-1/4" wide (with two loops), 28-1/4" square (with four or six loops).
- Powder coat finish available in choice of colors. See Page 50.
- Durable steel fabrication: 4-1/2" OD x 10 ga. wall central post, 1-1/2" OD steel tube bike loops, 1/4" x 8" base plate, all welded fabrication.
- Surface mount installation, (requires four 1/2" dia. anchor bolts, not included).
- Optional: Model ANC1-4 set of (4) 1/2" dia. x 3" heavy duty screw anchors for concrete surface. See Page 121.







Weight

(lbs.)

34

Length

(ft.)

6

Model

SB-6◆

SB-8♦

Burgundy powder coat finish.

Car Stops

- Available in 6 ft. or 8 ft. lengths.
- Made from 100% recycled plastic. Available in 3 colors.
- Maintenance free withstands traffic, weather and salt.
- Solid color throughout.
 Won't chip or fade.
- Anchor holes predrilled.
- Dimensions: 6" wide at base;
 4" tall.

Model	Length (ft.)	Weight (lbs.)
CSL-6♦	6	36
CSL-8♦	8	48

Color choices			The state of the s
for Car Stops and Speed	Yellow (PY)	Gray (PA)	Blue (PU)
Bumps	Replace (*) in model number with letters indicating color choice		

- Optional: Model ANC11-3 set of three 3/4" x 17-3/4" steel anchor stakes with head.
- **Optional**: Model ANC12-3 set of three 3/4" x 24" steel anchor stakes with head.

Speed Bumps


- Available in 6 ft. or 8 ft. lengths.
- Made from 100% recycled plastic. Available in 3 colors.
- Maintenance free withstands traffic, weather and salt.
- Solid color throughout. Won't chip or fade.
- Anchor holes predrilled.
- Dimensions: 10" wide at base; 2" tall at center.

Pilot Rock GHARGOAL GRILLS

Accessible Grill — ASW Series



Model ASW-20 B2 Accessible Grill with single level swivel grate, meets the ADA guidelines for access, reach, and operability. Shown with optional Model S6 Swivel Shelf.



Grate rotates 180° from over the fire with just 5 lbs. of force. The handle is NEVER over the fire.

• Two Sizes:

Model ASW-20 offers 300 sq. in. of cooking area Model ASW-24 offers 360 sq. in. of cooking area

- The single level cooking grate swivels 180 degrees over the charcoals or completely out of the firebox – but the grate handle is never over the heat.
- The cooking grate requires less than 5 lbs. of force to move, requires only one hand to operate, is less than 34" high.
- The firebox rotates 360 degrees in either direction on theft proof swivel attachment on both models. Standard 3-1/2" OD x 40" long base post for embedded installation (B2).
- The firebox is 6" high on the swivel side, and 10" high on the other side to provide wind protection above the grate.
- All welded firebox construction: 3/16" (7 ga.) thick steel, plus dieformed flange to retain ashes and reinforce the firebox from heat.
- Model ASW-24 features ring reinforcement under the firebox to dissipate heat and prevent warpage.
- All welded cooking grate fabrication: 1/2" diameter solid steel bars, mounted on steel tube allowing it to swivel 180 degrees. The operator handle includes a 1/8" x 1/2" flat bar coiled grip. All grate bars are welded on both sides.
- Finished with high temp, non-toxic black enamel paint.
- Optional: Model B18 surface mount base post (instead of standard embedded post). Surface anchor bolts are not included. Becomes Model ASW-20 B18.
- Optional: Swivel shelf Model S6 installs on 3-1/2" OD base post.

Accessible Grill in Stainless Steel



• Two Sizes:

Model ASWS-20 offers 300 sq. in. of cooking area Model ASWS-24 offers 360 sq. in. of cooking area

- Model ASWS-20 and ASWS-24 grills have fireboxes fabricated from 304 grade stainless steel for the back 7 ga. (3/16") and the sides/bottom 11 ga. (1/8"). Both fireboxes include integral dieformed flanges to retain ashes and to reinforce the firebox from heat warpage, including stainless steel ring reinforcement under the firebox. Stainless steel wire welded.
- 2-3/8" OD stainless steel pipe base post (B6S) for embedded installation.
- Stainless steel cooking grate is laser cut from 7 ga. (3/16") thick stainless steel plate, stainless swivel tube and handle.
- Stainless steel components are not painted. There will be visible weld marks.
- Optional: stainless steel surface mount base post Model B17S (to replace standard embedded post), 2-3/8" OD with welded on 8" square base plate. Grill becomes Model ASWS-20 B17S. Anchor bolts are not included (use #ANC1-4SS).

Model B2 Embedded Base (black enamel)



Model B6S Embedded Base (stainless steel)



This charcoal grill has been designed to meet the rules presented in the Draft Final Accessibility Guidelines for Outdoor Developed Areas 1011.3 (ADA-ABA 309.4) and 1011.5 (ADA-ABA 902.3) as presented by the U.S. Access Board Oct. 19, 2009.

CHARCOAL GRILLS

Pilot Rock



Firebox Dimensions (D x W x H)	
Cooking Area (Sq. In.)	300
Finish	. High-Temp Enamel
Vertical Grate Adjustment	None
Horizontal Grate Adjustment	180°
Weight	76 lbs.
Optional Shelf	\$6
Base Options	
Grate Option	None

Firebox Dimen	sions (D x W x H)	15" x 20" x 6"-10"
Cooking Area	(Sq. In.)	300
Finish (Firebox	& Post)	Stainless Steel
Vertical Grate	Adjustment	
		180°
Weight		60 lbs.
Optional Shelf		
Base Options .		B6S (Standard), B17S
Grate Option .		





Firebox Dimensions (D x W x H)
Finish High-Temp Enamel
Vertical Grate AdjustmentNone
Horizontal Grate Adjustment
Weight
Optional Shelf
Base Options
Grate OptionNone

Firebox Dimensions (D x W x H)	15" x 24" x 6"-10"
Cooking Area (Sq. In.)	
Finish (Firebox & Post)	Stainless Steel
Vertical Grate Adjustment	None
Horizontal Grate Adjustment	180°
Weight	70 lbs.
Optional Shelf	None
Base Options	B6S (Standard), B17S
Grate Option	None







Model B17S Surface Mount Base for ASWS-20 & ASWS-24 (stainless steel)





Pilot Rock CHARCON GRILLS

Infinitely Adjustable Grate — A, B, C, D Series




(Above) Model A-20/S B2 Premier Park Grill with Infinitely Adjustable cooking grate, shown with optional bolt on utility shelf.

(Right) Model C2-36/SS B2 Premier Park Grill with two Infinitely Adjustable cooking grates, shown with optional bolt-on utility shelves.





(Illustration) Pilot Rock Premier Park Grills feature the original Infinitely Adjustable cooking grate. Grate can be adjusted from just above the coals to as much as 12" above bottom of firebox. Grate lifts over and out of firebox but remains permanently attached.



- · Cooking Grate tips back out of firebox yet remains attached, for easier fire building and clean out.
- Structurally reinforced cooking grate is virtually indestructible.
- · Double Reinforced Firebox: First the bottom is ring reinforced to dissipate heat and prevent warpage. Second, integral formed flanges in front, sides and back panels provide increased field strength. The larger Models C2-36 and D2-48 include additional reinforcing ribs.
- Full 360-degree rotation in either direction, on theft-proof swivel attachment. Standard 3-1/2" OD x 40" long base post for embedded installation (B2 in model number).
- · Coiled handle grips are fabricated from 1/8" x 1/2" steel bar (not wire springs).
- · All-welded firebox and grate construction. No rivets or bolts. Firebox is fabricated from 3/16" thick (7 ga.) steel. Grate is constructed using 5/8" dia. perimeter and handlebars and 1/2" dia. center bars. Model D2-48 uses 3/4" dia. handlebars. All grate bars are welded on both sides.
- Entire unit is finished with high temp non-toxic black enamel paint.
- Optional: Surface mount, portable or caster bases; Bolt on utility shelves; swivel shelf. See illustrations below.





Model B2 Embedded Base (Standard on all models)







CHARCOAL GRILLS





Firebox Dimensions (D x W x H)	
Vertical Grate Adjustment	
from Bottom of Firebox	"
Weight83 lbs	
Optional Shelf	ŝ
Base Options	1

Firebox Dimensions (D x W x H) 16" x 24" x 8"
Cooking Area (Sq. In.)
Vertical Grate Adjustment
from Bottom of Firebox3-3/4"-12"
Weight91 lbs.
Optional Shelf
Base Options





Firebox Dimensions (D x W x H)
Vertical Grate Adjustment
from Bottom of Firebox
Optional Shelf (1 or 2) S1
Base Options B2 (Standard), B3, B4, B14

Firebox Dimensions (D x W x H)32" x 32-1/2" x 8"
Cooking Area (Sq. In.)
No. of Grates
Vertical Grate Adjustment
from Bottom of Firebox3-3/4"-12"
Weight214 lbs.
Optional Shelf
Base Options B2 (Standard), B3, B4, B14







Model S1 7-1/8" x 9-5/8" Shelf



Pilot Rock CHARGON GRILLS

MultiLevel Grills — N Series









Model NS/S-20/S B6S multilevel grill with stainless steel firebox and post. Shown with optional stainless steel cooking grate and **Model S3S** stainless steel bolt-on shelf.

- Two sizes: Model N-20 provides 300 sq. in., and Model N-24 provides 432 sq. in. of cooking area on the four level adjustable cooking grate.
- Model N-20 is available with the standard high-temp black enamel finish; or with a hot dip galvanized firebox and post; or with a stainless steel firebox and post.
- Model N-24 is available with the high-temp black enamel finish or with galvanized firebox and post.
- Stainless steel grill Model NS-20 B6S is designed for areas where the natural environment is especially corrosive to (carbon) steel. The stainless steel can retard the onset of "rust out" so the grill remains functional longer, reducing maintenance and replacement costs.
- Full 360° rotation in either direction on theft-proof swivel attachment. Embedded installation of post is standard. Models N-20 and N-24 use a 3-1/2" OD x 40" post. Model NS-20 is mounted on a 2-3/8" OD x 40" long stainless steel post.
- All-welded firebox construction. The N-20 and N-24 firebox is fabricated from 3/16" (7 ga.) thick steel. Model NS-20 grill uses 304 grade 3/16" stainless steel for the bottom and 1/8" thick 304 stainless steel for the sides of the firebox. All designs include integral die-formed flanges to retain ashes and to reinforce the firebox from heat warpage.

- All welded cooking grate construction: fabricated using 5/8" dia. steel bars for support handles, and 1/2" dia. steel bars for the cooking surface; permanently incorporated into the firebox and cannot be removed; finished with high temp non-toxic black enamel paint; handle grips are 1/8" x 1/2" coiled steel bar. All grate bars are welded on both sides.
- Optional: Series S3 bolt on utility shelf for all N Series grills.
- Optional: Model N-20 and N-24 can be hot dip galvanized to include the firebox and post (example: Model N/G-20 B2G).
- Optional: Model N-20 painted grill, N/G-20 galvanized grill, and NS-20 stainless steel grill can be equipped with a stainless steel cooking grate (example: N/S-20, N/G/S-20, NS/S-20).
- **Optional**: Model N-20 grill can be built to incorporate a hot plate measuring 8" x 15". This replaces the grate bars in that portion of the total grate (becomes Model N-20/HP).
- Optional: Hinged steel grill cover on Model N-20 and N-24 (painted or galvanized finish). The galvanized cover can be used on the NS-20 stainless steel grill. Model S3 shelf cannot be used with cover.
- Optional: All standard B2 base posts can be replaced with a portable disc base (B4) or a bolt down base plate (B3).
- Optional: Swivel shelf Model S6 installs on 3-1/2" OD base post on models N-20, N/G-20, N-24, and N/G-24. This shelf can be used with the grill cover. Available with painted finish only. See Page 106.



Model B2 (Standard) Embedded Base Model B6S for NS-20 Stainless Steel Grill

Model B3 Surface Mount Base Model B3G Surface Mount Base (galvanized) Model B175 Surface Mount Base Post for NS-20 Grill





Model GC/B Grill Cover for Model N-20 or N-24

CHARCOAL GRILLS Pilot Rock



Firebox Dimensions (O x W x H)
Cooking Area (Sq. In.)	
Grate Options	. (N/S) Stainless Steel, or (/HP) Hot Plate
Vertical Grate Adjustn	nent from Bottom
of Firebox	3-1/2", 5-1/4", 7", and 8-3/4"
Weight	80 lbs.
Optional Shelf	
Optional Grill Cover (S	S3 Shelf can not be used) (1) GC/B-1
or Galvanized Grill (Cover(1) GC/G-1
Base Options	B2 (Standard), B3, B4

Firebox Dimensions (D x W x H) 15" x 20" x 10"
Cooking Area (Sq. In.)
Finish (Firebox and B2 Post) Hot Dip Galvanized
Grate Options (N/G/S) Stainless Steel, or (/HP) Hot Plate
Vertical Grate Adjustment from Bottom
of Firebox
Weight
Optional Shelf (1) S3/G (Hot-dip Galvanized), (1) S6
Optional Galvanized Grill Cover(1) GC/G-1
Base Options






Firebox Dimensions (D x W x H)
Vertical Grate Adjustment from Bottom of Firebox
Weight
Optional Shelf
Optional Grill Cover (S3 Shelf can not be used) (1) GC/B-2 or Galvanized Grill Cover
Base Options B2 (Standard), B3, B4, B3G

Firebox Dimensions (D x W x H) 15" x 20" x 10"
Cooking Area (Sq. In.)
Finish (Firebox and Post) Stainless Steel
Grate Options(NS/S) Stainless Steel
Vertical Grate Adjustment from Bottom
of Firebox
Weight
Optional Shelf
Optional Galvanized Grill Cover(1) GC/G-1
Base Options






Pilot Rock CHIMICHOM CHRIST




Model Q-20/S B2 Grill with tip-up grate and optional S3 shelf

MultiLevel Grills — Q Series

- Two sizes: Model Q-20 provides 300 sq. in., and Model Q-24 provides 432 sq. in. of cooking area. Cook grate adjusts to four levels and tips up for easy fire building and clean up.
- Full 360° rotation in either direction on theft-proof swivel attachment. Standard 3-1/2" OD x 40" long base post for embedded installation (B2).
- All welded firebox construction includes 3/16" (7 ga.) thick steel, plus integral die-formed flanges to retain ashes and reinforce firebox from heat.
- All welded cooking grate construction: 5/8" dia. steel bars for support handles, 1/2" dia. steel bars for cooking surface. All grate bars are welded on both sides. Grate is permanently incorporated into firebox and cannot be removed. Grate tips up. Handle grips are 1/8" x 1/2" coiled steel bar.
- All components are finished with high temp non-toxic black enamel paint.
- Optional: Model Q-20 and Q-24 can be hot dip galvanized to include the firebox and post (example Model Q/G-20 B2G).
- Optional: Model Q-20 painted grill and Q/G-20 galvanized grill can be equipped with a stainless steel cooking grate (example: Q/S-20, Q/G/S-20).
- Optional: Model S3 bolt on shelf, or Model S3G galvanized shelf.
- Optional: Model S6 swivel shelf installs on 3-1/2" OD base post. This shelf can be used with grill cover. Painted finish only. See Page 106.
- Optional: Hinged grill cover on Model Q-20 or Model Q-24 (painted finish) or Q/G-20 and Q/G-24 (galvanized finish). Note: Model S3 bolt on shelf cannot be used with grill cover.



Firebox Dimensions (D x W x H)
Cooking Area (Sq. In.)	
Finish	High-temp Enamel
Optional Finish (Firebox a	nd B2 Post) Hot Dip Galvanized
Grate Options	. (Q/S or Q/G/S) Stainless Steel
Vertical Grate Adjustment from	Bottom
of Firebox	3-1/2", 5-1/4", 7", and 8-3/4"
Weight	80 lbs.
Optional Shelf	(1) S3, (1) S6
Optional Grill Cover (S3 Shelf c	an't be used) (1) GC/B-1
Optional Galvanized Grill Cover	r(1) GC/G-1
Base Options	B2 (Standard), B3, B4

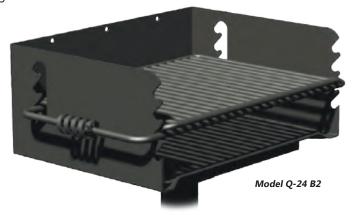

Firebox Dimensions (D x W x H) 18" x 24" x 10)"
Cooking Area (Sq. In.)	2
Finish	
Optional Finish (Firebox and B2 Post) Hot Dip Galvanize	d
Vertical Grate Adjustment from Bottom	
of Firebox	Ι"
Weight108 lb:	S.
Optional Shelf	6
Optional Grill Cover (S3 Shelf can't be used) (1) GC/B-	2
Optional Galvanized Grill Cover(1) GC/G-	2
Base Options	



Double MultiLevel Grill – N2-2032 Series

- **Model N2-2032** charcoal grill provides a total of 600 sq. inches of cooking area on twin 300 sq. in. four level adjustable back-to-back cooking grates.
- Use one or both fireboxes, depending on the size of your group. Build different size coal fires depending on your menu. Each grate can be adjusted independently.
- All-welded grill firebox construction. The N2-2032 firebox is fabricated from 3/16" (7 ga.) thick steel, with integral die-formed flanges to retain ashes and to reinforce the firebox from heat warpage, plus a reinforcement ring under the entire firebox for additional strength.
- All welded cooking grate construction. The cooking grates are fabricated using 5/8" dia. steel bars for support handles, and 1/2" dia. steel bars for the cooking surface. All grate bars are welded on both sides. The cooking grate is permanently incorporated into each firebox and cannot be removed. Grate handle grips are 1/8" x 1/2" coiled steel bar.
- Full 360° rotation in either direction on theft-proof swivel attachment. The standard B2 embedded installation base post is 3-1/2" OD x 40" steel pipe.
- **Optional**: The standard B2 embedded base post can be replaced with B4 portable disc base, or B3 surface/bolt down base plate (anchor bolts are not included use #ANC1-4 Concrete Anchor Kit), or B14 portable caster base.
- **Optional**: (1) or (2) Model S1 (7" x 9-5/8") bolt on side utility shelf, attached at the top/center of the firebox on one or both sides.
- **Optional**: (1) Model S2 (9" x 20") bolt on side utility shelf, attaches to reinforcement ring under firebox on one side only.
- **Optional**: Model N2-2032 can be equipped with twin stainless steel cooking grates (becomes Model N2/SS-2032).



Model N2-2032 B2 Grill with two cooking grates and two optional S1 shelves. Order shelves separately.



Model N2-2032 B2 Grill with two cooking grates and two optional S1 shelves. Order shelves separately.



Firebox Dimensions (D x W x H)
Grate Options
Vertical Grate Adjustment
from Bottom of Firebox 3-1/2", 5-1/4", 7", and 8-3/4"
Weight141 lbs.
Optional Shelf (order separately)(1 or 2) S1, (1) S2
Base Options B2 (Standard), B3, B4, B14



Pilot Rock | CHARACTER | CHARA



Model H-16 B6 multilevel grill.

- Cooking grate adjusts to 4 levels plus tips up for easy fire building and clean out. Grate stays permanently attached to firebox.
- Grill rotates 360 degrees in either direction on theft-proof swivel attachment to post. Model H stands on a 2-3/8" OD post (B6). Models J and K use a 3-1/2" OD post (B2).
- Welded construction: 3/16" thick (7 ga.) steel firebox with dieformed reinforcing flanges; 5/8" dia. steel perimeter and handle bars, 1/2" dia. grate bars. All grate bars are welded on both sides. High temp non-toxic black enamel paint finish.
- Side indentations support the grate in 4 locations and minimize side openings for superior draft protection. Coiled 1/8" x 1/2" steel bar handle grips for convenient grate adjustment.
- Optional: Model S3 bolt-on shelf on K-20 grill. Or Model S6 swivel shelf mounts on 3-1/2" OD base post on J-20 and K-20 grills.
- **Optional**: Model K-20 can be equipped with hinged grill cover.
- Optional: Model J-20 and K-20 can include 8" x 15" Hot Plate, replacing a portion of the bars in the cooking grate (e.g. becomes Model J-20/HP).



Firebox Dimensions (D x W x H) 16" x 16" x 8"
Cooking Area (Sq. In.)
Vertical Grate Adjustment
from Bottom of Firebox 2-1/2" to 7-3/4"
Weight
Optional Shelf None
Base Options

MultiLevel Grills — H, J, or K Series




8"
00
4"
S.
56
17
֡



Firebox Dimensions (D x W x H)	ე"
Cooking Area (Sq. In.))()
Vertical Grate Adjustment	
from Bottom of Firebox 4" to 9-1/4	4"
Weight	s.
Optional Shelf	6
Optional Grill Cover (S3 Shelf can't be used) (1) GC/B-	-1
Base Options	34





Model B3 or B17 Surface Mount Base







CHARCOAL GRILLS

Pilot Rock

Covered Grills — EC Series



- (Above)

 Model EC-40/S B2 covered grill with utility shelf and optional warming basket. (Left)
- Model EC-26/S B2, cover closed, showing handles, draft vents and clean out door.

- Covered Grills hold in smoke and heat. Covers also keep rain and snow out of firebox to prolong life of grill.
- Single level cooking grate is hinged to tip up for easy access to fire grate. Fire grate keeps coals off bottom of firebox. This provides better draft control and prolongs life of grill. The fire grate also tips up for easy ash clean out through side door.
- Four adjustable draft vents control fire and cooking rate. Full contact rear edge between bottom and cover provides draft control when lid is open. Continuous 360-degree rotation in either direction is provided on theft-proof swivel attachment to 3-1/2" OD x 40" long base post (B2) for embedded installation.
- Both firebox and cover have a 1" formed flange to provide flat, stable contact perimeter and to substantially reinforce grill halves. Slotted steel hinges allow cover to adjust to an obstruction, eliminating potential pinch points. Once fully open the cover is locked in place and cannot be closed without deliberate user action. Cover and grate handle grips are 1/8" x 1/2" coiled steel bar.
- All-welded construction. Heavy gauge steel is used for cover (14 ga.), bottom (10 ga.) and end panels (11 ga.). Cooking and fire grates are created using 1/2" dia. steel bar, with 5/8" dia. handle bars. All grate bars are welded on both sides. Unit is finished with high temp non-toxic black enamel paint.
- Each grill includes one Model S2 bolt-on utility shelf, 9" x 20".
- Optional: Model S6 swivel shelf available on EC-26 only. See Page 106.
- Optional: Portable, bolt down or caster bases.
- Optional: Warming Basket to hang inside top cover.



Overall Dimensions without shelf (D x W x H)

19-1/2" x 29-1/4" x 16-1/2"
Cooking Area (Sq. In.)
No. of Grates(1) Cooking, (1) Fire
Weight
Optional Shelf
Base Options
Warming Basket (7" x 21" x 2")



Overall Dimensions without shelf (D x W x H)

Model B4

Base

Portable Disk

19-1/2" x 41-1/2" x 16-1/2"
Cooking Area (Sq. In.)
No. of Grates
Weight
Optional ShelfNone
Base Options B2 (Standard), B3, B4, B12, B14
Warming Basket (7" x 33" x 2") ECB-40



Model B2 Embedded Base









Model B14 4-wheel Caster Base

Pilot Rock GHARGOAL GRILLS



Model Q3-2460 B8 shelterhouse grill with standard surface mount base.



24" x 60" x 10"
(3) Cooking
n
./2", 5-1/4", 7", and 8-3/4"
S7
B8 (Standard), B16

Large Group Grill — **Q3-2460 Series**

- Model Q3-2460 B8 group grill provides 1220 total sq. inches of cooking area on 3 grate surfaces.
- Firebox measures 24" x 60" x 10" high sides, constructed of 3/16" thick steel plate, rib reinforced to prevent box warpage.
- Cooking grate adjusts to 4 levels above the fire, is not removable from the firebox, includes dual protective coiled steel bar handle grips at both ends. Grate tips up for easy fire building and cleaning.
- Cooking grate is constructed of 5/8" dia. handle bars and 1/2" dia. grate bars. All grate bars are welded on both sides. Includes 1" wide steel full-length support brace under front edge of grate to prevent deformation.
- Total grate area is divided into three cooking chambers and is supported by four 3/16" thick steel panels.
- Base post is 6" OD heavy wall steel pipe with a 3/8" x 10" square base plate for surface installation (B8). Four 1/2" x 6" J-bolt anchors for concrete footing are included.
- Continuous 360 degree rotation on theft proof swivel attachment.
- Finished with high temp non-toxic black enamel paint.
- Optional: Embedded base post to replace bolt down base plate (B16).
- Optional: Model S7 bolt on shelf, 7 ga. steel, 10-5/8" x 59".













CHARCOAL GRILLS

(Left) Model

P-1000/S B7


Pilot Rock



Large Group Grills — P or L Series

- Model P-1000 offers 1008 sq. in. on twin 4-level adjustable cooking grates.
- Model L-1500 offers 1350 sq. in. on twin single-level hinged cooking grates with a fire grate that adjusts to 4 levels under them.
 - · Continuous 360-degree rotation on theftproof swivel attachments. Model P-1000 stands on a 4-1/2" OD post; Model L-1500 stands on a 6" OD post. Both grills feature a 10" sq. bolt down plate installation onto a concrete surface. Four 1/2" x 6" J-bolt anchors
- L-1500/SS B8 included. shelterhouse grill. • Both Models include (1) bolt on 10-5/8" x 36" steel utility shelf. Both grills have additional optional shelves.
 - Welded construction: 3/16" thick (7 ga.) steel firebox with die-formed reinforcing flanges, substantial gusseted bracing and ring reinforcement to help dissipate heat. Grates use 5/8" dia. steel perimeter and handle bars, and 1/2" dia. grate bars. All grate bars are welded on both sides. Entire grill is finished with high temp non-toxic black enamel
 - Optional: Portable caster base or embedded base to replace bolt down base plate.







Firebox Dimensions (D x W x H) 28" x 36	" x 10"
Cooking Area (Sq. In.)	. 1008
No. of Grates	2
Vertical Grate Adjustment	
from Bottom of Firebox	" to 9"
Weight2	15 lbs.
Optional Shelves(1) S4 (Included), (1 or 2) S1, (1) Additional Shelves(1) S4 (Included), (2 or 2) S1, (3 or 2) S1, (4 or 2) S1, (5 or 2) S1, (6 or 2) S1, (7 or 2) S1, (8 or 2) S1, (9 or 2) S1, (10 or 2) S1, (11 or 2) S1, (12 or 2) S1, (13 or 2) S1, (13 or 2) S1, (14 or 2) S1, (15 or 2) S1, (15 or 2) S1, (15 or 2) S1, (16 or 2) S1, (17 or 2) S1, (18 or 2) S1,	onal S4
Base Options	.3, B15





Model B13 and **B16** Embedded






Pilot Rock Pilar (40) 4 (47) 4 (47) 4 (47)

Grill Station — Your Grill and Work Table All In One



Model GS/CB-5PC Grill Station with black powder coated frame, cedar colored recycled plastic planks and optional Model Q-20-2 park grill.



Your choice of grill can be installed at either end or in the center of the Grill Station.

• The Grill Station combines a Pilot Rock charcoal grill with a work table. No need for separate installations of a grill on a post and a utility table. Now it's all in one!

Model GS-5 Grill Station features include:

- Rugged Construction: 1-5/8" OD steel pipe end frames with welded-on brace and top frame bracket. Diagonal braces ensure a rigid, stable structure. Top frame is 1-1/2" Steel angle, welded into single component.
- Frame Finish: Hot dip galvanized is standard. Colorful powder coat paint is optional. See Page 50.
- Table Top: Built with (5) 2" x 10" (nom.) x 20" wide planks, plus (1) grill mount plate. Available table top materials include: untreated or treated pine, colorful recycled plastic, and clear anodized or powder coated aluminum. See Pages 51 & 53.
- Footprint: Grill Station is 22-1/2" by 64" (nom.) overall outside dimensions (does not include grill).
- Work Space: 20" wide by 48" long (when grill is at one end).
- Work Height: Table height = 30-1/2"; Grill height = 36" to bottom of firebox (charcoals). Cooking grate height will vary depending on grill model chosen.
- Grill Mount: The grill can be installed at either end or in the center. (Note: a center location will reduce table top space to 2 planks per side.) The theft proof swivel attachment allows the grill to rotate 360 degrees for maximum cooking control.
- **Installation**: Surface mount flanges on each frame leg. Anchor bolt kit #ANC3-4 for a concrete surface is included.
- **Grill Choices**: The Pilot Rock charcoal grill is sold separately. See Chart below.
- Optional: 2-part aluminum cover caps for frame posts. See Page 27.

	GRILL CHOICES FOR MODEL GS-5 GRILL STATION							
Model	Cooking Area	Catalog Page(s)	Model	Cooking Area	Catalog Page(s)	Model	Cooking Area	Catalog Page(s)
ASW-20-2	300	94-95	N-20-2	300	98-99	J-20-2	300	102
ASW-24-2	360	94-95	N-24-2	432	98-99	K-20-2	300	102
A-20-2	320	96-97	Q-20-2	300	100	EC-26/S-2	320	103
B-24-2	384	96-97	Q-24-2	432	100			

Swivel Shelf

- Model S6 Swivel Shelf (8" x 16") option for select Pilot Rock grills installs on the 3-1/2" OD base post (must be installed prior to firebox and locking pin). The shelf will swivel 360 degrees around the post, independently of the grill firebox. Finished with black enamel paint.
- Model S6 Swivel Shelf will fit on the following Pilot Rock Grills: ASW-20, ASW-24, A-20, B-24, N-20 (shown below), N-24, Q-20, Q-24, J-20, K-20, and EC-26 (shown below). (This option is not available on EC-40 Grills.)



Model EC-26 Covered Grill with optional S6 swivel shelf.



Model N-20 Grill shown with optional Grill Cover and optional S6 swivel shelf.

Page(s)
94-95
94-95
96-97
96-97
98-99
98-99
100
100
102
102
103

(G:/AR(CO)A) = (GRI) = Pilot Rock



Hot Coal Disposal Bin

- Model HCB/B-1 Hot Coal Bin is a convenient, economical, safe way to dispose of hot coals and ashes from grills, and help prevent the dumping of hot coals on the ground.
- The 23" square top funnels down to a 12" square grated The grate bar spacings will allow full size charcoal briquettes through, but will restrict most large trash. full-length piano hinge attaches the door to one side panel. The draw-pull door latch can be padlocked to keep other trash and vandals out.
- Inside place any size steel container up to a 32-gallon capacity garbage can.
- OR: Anchor Bin to a concrete pad. The ashes collect on the concrete pad inside the Bin. To clean out, open the door and scoop out the ashes with a flat shovel.
- The Hot Coal Bin also serves as a convenient depository for park maintenance personnel to dump ashes as they clean out pedestal grills. Picnickers can also use it when done grilling.
- Two anchor methods: Order optional Model M9/B ground anchor stakes to secure the Bin on top of the ground (this requires a steel collection can inside); or for anchoring Bin to concrete surface order Model BR-4HSA anchors.
- Features: Bin measures 23" x 23" x 32-1/2" tall, fabricated from 1/16" (14 ga.) steel for the side panels and top funnel, 1/2" dia. steel bars for the grate, high temp black enamel paint, includes (2) DE-20 "caution" decals, ships unassembled, galvanized fasteners included.
- Optional: Powder coat paint finish on side panels and door (not high heat). See Page 50.
- Optional: See available options below.



Model HCB/CR-1 Hot Coal Bin with optional red powder coat paint finish (not high heat).





Model CNG-2310C 31 gallon galvanized steel can

Model M9/B Ground Anchors, set of (3).

-or-BR-4HSA set of (4) 3/8" x 1-7/8" hex sleeve concrete anchors (not shown).



Model CNG-W10120 12 quart galvanized steel collection pail

Pilot Rock CHIARRANA GRADES

Options for Grills











B15

B4

4-1/2" x 28-9/16"


3-1/2" x 25-11/16"

Portable, Four Casters

Portable,

Disc



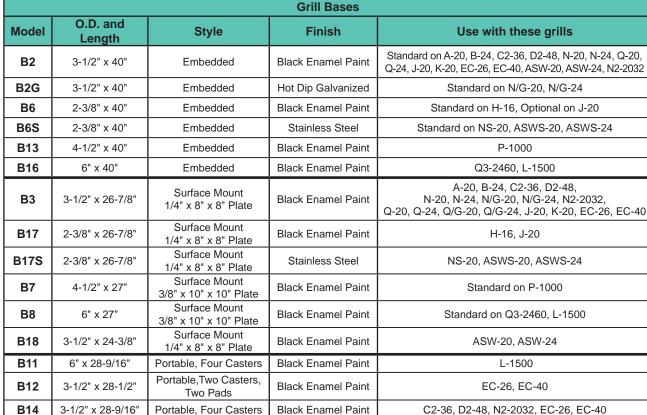



Swivel. Mounts on Base Post, must be installed before grill

1

Grill Shelves						
Model	Dimensions	Style	Finish	Use with these grills		
S1	7-1/8" x 9-5/8"	Bolt-on	Black Enamel Paint	A-20, B-24, C2-36, P-1000, N2-2032		
S2	9" x 20"	Bolt-on	Black Enamel Paint	D2-48, N2-2032, Included on EC-26 & EC-40		
S3	7" x 20"	Bolt-on	Black Enamel Paint	N-20, N-24, Q-20, Q-24, K-20		
S3/G	7" x 20"	Bolt-on	Hot Dip Galvanized	N/G-20, N/G-24, Q/G-20, Q/G-24		
S3S	7" x 20"	Bolt-on	Stainless Steel	NS-20, NS/S-20		
S4	10-5/8" x 36"	Bolt-on	Black Enamel Paint	(1 Included, 1 Optional) L-1500 & P-1000		
S6	8" x 16"	Swivel Mount on base Post (Install before grill)	Black Enamel Paint	A-20, B-24, N-20, N/G-20, N-24, N/G-24, Q-20, Q/G-20, Q-24, Q/G-24 J-20, K-20, EC-26, ASW-20, ASW-24		
S7	10-5/8" x 59"	Bolt-on	Black Enamel Paint	Q3-2460		

Black Enamel Paint

Black Enamel Paint

Grill Covers				
Model	Use with these grills			
GC/B-1	N-20, Q-20, K-20			
GC/G-1	N-20, N/G-20, NS-20, Q-20, Q/G-20			
GC/B-2	N-24, Q-24			
GC/G-2	N-24, N/G-24, Q-24, Q/G-24			





Optional Cooking Grates		
Model	Use with these grills	
/HP	N-20, N/G-20, J-20, K-20	
/S	N-20, N/G-20, NS-20, Q-20, Q/G-20, N2-2032	

P-1000 A-20, B-24, C2-36, D2-48,

N-20, N-24, N/G-20, N/G-24, N2-2032

Q-20, Q-24, Q/G-20, Q/G-24, J-20, K-20, EC-26, EC-40

Stainless Steel Grate, /S

Campfire Ring Only - No Grate

- When you need the fire barrier only, without the cooking grate.
- Our **FX Series** Campfire Rings provide a solid steel fire barrier, and do not include the cooking grate.
- Perfect when you don't plan to cook over the fire, but you need the barrier to control the fire and protect the property or your landscape blocks.*
- The steel ring is rolled from 3/16" thick steel plate with an integral formed 1" wide flange around the top edge. This flange provides extra strength against heat warpage and eliminates a vertical edge. Draft holes are provided for fire ventilation.
- FX Series Campfire Rings are available in 4 different diameters and 4 different side heights (see chart below for dimensions). Select the diameter to control the fire size, and the side height to achieve the degree of fire barrier needed.
- All FX Series fire rings come with anchors. Tip back anchor pins (TB) available on some models keep the ring secured in one place, but allow the ring to tip up for easy clean out. Other stationary anchor systems include angle legs (AL) and pin anchors (PA) keep the ring securely on the ground. See Page 120. Refer to the chart below to see which anchor method is available on each fire ring.
- Optional: Bolt on utility shelf Model S5. See Page 119.
- Optional: Removable Drop-In Grate Model DIG-U4. See Page 118.
- **Optional:** Snuffer Cover protects fire ring from the elements and suffocates fires. *See Page 118.*

Model	Inside Diameter	Side Height	Anchor System	Cooking Area (Sq. In.)	
FX-26/7/TB	24"	7-3/8"	TB (Standard),		
FX-30/7/TB		7-3/8"	AL, TA (Optional),		
FX-30/9/TB	30"	9"	TB-BD (FX-30 only).		
FX-30/11/TB		11-3/8"	See Page 120	No Cooking	
FX-48/7/PA		7-3/8"			
FX-48/9/PA	46"	9"			
FX-48/11/PA		11-3/8"	PA (Standard),	Grate	
FX-56/7/PA		7-3/8"	AL (optional).		
FX-56/9/PA	54"	9"	See Page 120		
FX-56/11/PA		11-3/8"			
FX-30/18/PA	30"	16-7/8"			

*Note: FX firerings without anchors can be used as fire pit inserts. Consult your local block supplier for which block will be best to construct a fire pit with the necessary inside diameter to fit your selected firering.



Model FX-30/11/TB campfire ring in it's simplest form, with no grate.



Model FX-30/11/TB campfire ring with optional Model DIG-U4 Drop-in cooking grate.



Model FX-30/11/TB campfire ring with optional Model CFX-30 Snuffer Cover.



Picnic Tables (Pages 28-49) are handy to have near campfire rings to provide a comfortable area where campers can sit and enjoy their freshly cooked meal.

Pilot Rock CAMPEIRE RINGS

Stainless Steel Fire Ring

- The **FSWS Series** Campfire Ring is rolled using 11 ga. (1/8" thick) stainless steel with a 1" roll formed top flange for additional strength and safety. Draft holes are provided for ventilation. The ring is not painted.
- The FSWS firering is available in five side heights: 7, 9, 11, 17 and 23 inches. See chart below.
- Standard: 300 sq. inch single level swivel cooking grate, will move 180 degrees - from over the fire to completely out of the firering – for easy fire building and serving. The handle is never over the fire. Some installation required.
- The two tallest firerings with this swivel grate meet the ADA guidelines for reach and operability: one hand operation requiring less than 5 lbs. of force to move. The ring must be filled with aggregate (not included) about 9" deep to provide the elevated fire surface.
- Swivel cooking grate is a single welded component using ½-inch dia. black steel bars, mounted on a 2-3/8-inch OD steel tube allowing it to swivel 180 degrees. 5/8-inch dia. operator handle includes a 1/8-in. x ½-in. flat bar coiled grip. All grate bars are welded on both sides. Cooking grate components are finished with high temp, non-toxic black enamel paint.
- Standard: three black pin anchors (PA) to secure firering on site, into concrete footings (ring does not tip up).
- Optional: three black bolt on spade anchors to secure ring on site, buried in ground (ring does not tip up). See Page 120.
- Optional: Model S5 black bolt-on utility shelf. See Page 119.
- Optional: FXS Series stainless steel ring only, no cooking grate.



Model FSWS-30/7/PA stainless steel campfire ring with Model S5 Shelf.



Model FSWS-30/7/PA stainless steel campfire ring with Model S5 Shelf. Swivel grate is turned out of ring.



Model FXS-30/7/PA stainless steel campfire ring only, no grate.

Model	Inside/ Outside Diameter (inches)	Side Height (inches)	Wheelchair Accessible Height	Anchor System	Swivel Grate Cooking Area (Sq. In.)	Optional: No cooking grate Order this Model #
FSWS-30/7/PA		7-1/4"				FXS-30/7/PA
FSWS-30/9/PA		8-7/8"	No	PA (Standard)	300	FXS-30/9/PA
FSWS-30/11/PA	30/32	11-1/4"		AL(Optional)		FXS-30/11/PA
FSWS-30/18/PA		16-3/4"	Yes 🔥	See Page 120		FXS-30/18/PA
FSWS-30/24/PA		23-1/4"	Yes 5			FXS-30/24/PA



Model S5 black bolt-on utility Shelf.



Model I-RS Removable Cooking Grate

- Optional: Model I-RS single level removable cooking grate can be used with the FXS Series stainless steel campfire rings.
- This single-level tip-over cooking grate provides 290 sq. inches of surface area. It can lay flat over the fire or be tipped over and out of the firering. The hinge/pivot bracket is bolted to the inside of the firering. When you don't need the cooking grate it can easily be removed from the hinge/pivot bracket.
- The cooking grate is a single welded component using a 5/8" dia. steel perimeter, ½-inch dia. steel grate bars and a 3/4" dia. handle bar. The handle bar also supports the cooking grate on the firering top flange. All grate bars are welded on both sides. The operator handle includes two 1/8"x 1/2" flat bar coiled grips.
- All grate kit components are finished with high temperature non-toxic black enamel paint.
- Some assembly is required to attach the cooking grate hinge/pivot brackets to the firering inside wall.




Model I-RS removable cooking grate.

CAMPFIRE RINGS

The Original Infinitely Adjustable Cooking Grate








Model FA-30/7/TB campfire ring, 7-3/8" tall.

- The FA Series Campfire Rings offer our original Infinitely Adjustable cooking grate.
- 270 sq. inch cooking grate is Infinitely Adjustable vertically from below the top of the ring to 7-3/4" higher. This cantilevered grate is structurally reinforced to resist hard use and vandalism.
- The cooking grate can be lifted over and out of the ring, but remains permanently attached.
- Ring is rolled from a 3/16" thick steel plate with an integral formed 1" wide flange around top edge. This flange provides extra strength against heat warpage and eliminates a vertical edge. Draft holes are provided for fire ventilation.
- FA Series Campfire rings come in two different diameters and 4 different side heights (see chart below). Select the diameter to control the size of fire, and the side height to achieve the degree of fire barrier needed.

- **FA Series** firerings include tip back anchor pins (standard) to keep the ring secured, but allow the ring to tip up for easy clean out. For other anchor systems, see page 120.
- Cooking grate adjustment handles, made from 3/4" dia. steel, are turned outside of the ring, away from the fire. The handle grips are 1/8" x 1/2" coiled steel bar. The cooking grate is built using 5/8" dia. steel perimeter bars and 1/2" dia. steel grate bars. All grate bars are welded on both sides.
- Model FA-30/18 combines our Infinitely Adjustable cooking grate with a taller ring, providing a more comfortable working height. The elevated design allows placement flexibility because the aggregate fill (not included) protects existing surfaces such as pavers, asphalt and concrete. This fill also insulates the ground to reduce the chance of root fires in heavily wooded areas.
- Finished with high temp, non-toxic black enamel paint.
- **Optional:** Bolt on utility shelf Model S5. See Page 119.
- **Optional:** Heat shield, welded on. *See Page 119.*



Model FA-30/18/S fire ring with optional shelf. (Note: anchor pins not used in this installation).



FA Side Heights

Model	Inside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)	Vertical Grate Adj, (in.)
FA-26/7/TB	24"	7-3/8"	TB (Standard),		
FA-30/7/TB		7-3/8"	AL, TA (Optional),		7-3/4
FA-30/9/TB		9"	TB-BD (FA-30 only). See Page 120		
FA-30/11/TB	30"	11-3/8"	0007 ago 720	270	
FA-30/18/PA		16-7/8"	PA (Standard), AL (Optional) See Page 120		

Pilot Rock CAMPERERINGS

Single Level Cooking Grate



Model FS-30/9/TB campfire ring, 9" tall.


- The **FS Series** Campfire Rings provide a single level cooking grate with our flanged fire ring - an economical design when cooking over the fire might be a lower priority.
- 290 sq. inch single level cooking grate is hinged to the ring and remains permanently attached.
- Ring is rolled from 3/16" thick steel plate with an integral formed 1" wide flange around top edge. This flange provides extra strength against heat warpage and eliminates a vertical edge. Draft holes are provided for fire ventilation.
- FS Series Campfire Rings are available in 4 different diameters, and up to 3 different side heights (see chart below, right). Select the diameter to control the size of fire, and the side height to achieve the degree of fire barrier needed.
- Tip back anchor pins (standard) keep the ring secured in one place, but allow the ring to tip up for easy clean out. Other anchor systems available. See Page 120.
- Cooking grate adjustment handles, made from 3/4" dia. steel, reach outside of the ring, away from the fire. The handle grips are 1/8" x 1/2" coiled steel bar. The cooking grate is built using 5/8" dia. steel perimeter bars and 1/2" dia. steel grate bars. The grate hinges are formed using 5/8" dia. steel bar. All grate bars are welded on both sides.
- · Finish: high temp, non-toxic black enamel paint.
- Optional: Utility shelf Model S5. See Page 119.
- Optional: Single level Swivel Grate, 300 sq. in. See Page 116.



Swivel Grate Firerings (Page 116) are ADA Compliant.



Model FS-48/9/PA campfire ring, 9" tall.

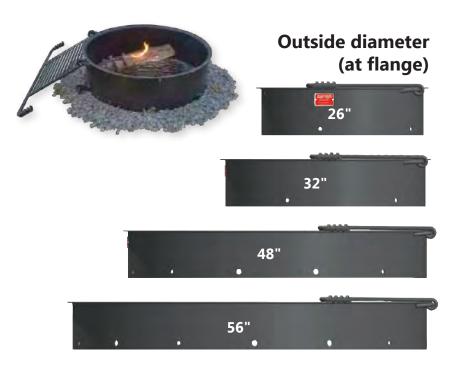

Model	Inside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)	
FS-26/7/TB	24"	7-3/8"	TB (Standard),		
FS-30/7/TB		7-3/8"	AL, TA (Optional),	290	
FS-30/9/TB	30"	9"	TB-BD (FS-30 only). See Page 120	290	
FS-30/11/TB		11-3/8"			
FS-48/7/PA		7-3/8"			
FS-48/9/PA	46"	9"			
FS-48/11/PA		11-3/8"	PA (Standard), AL (Optional)	290	
FS-56/7/PA		7-3/8"	See Page 120	290	
FS-56/9/PA	54"	9"			
FS-56/11/PA		11-3/8"			

Multilevel Campfire Ring



Model L-32/6/TB

- Model L-32 features a 300 sq. inch cooking grate that adjusts to 4 levels, from 2" to 8" above the ring height. Construction includes 3/16" thick steel for the ring and adjustment panels. The 1" formed flange reinforces the ring. The cooking grate is welded together using 5/8" dia. handle/support bars with coiled steel grips, and 1/2" grate bars. All grate bars are welded on both sides. Tip back anchor pins secure the ring in place but allow it to tip up for easy clean up. Finished with high temp, non-toxic black enamel paint.
- Optional: Bolt on utility shelf Model S5. See Page 119.
- **Optional:** Model RL-35 and RL-36 steel riser platforms for L-32/6 firering. Combined units are wheelchair accessible. Hard surface installation (anchors not included). Use #ANC1-4 anchor kit. *See Page 121.*

Model	Inside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)
L-32/6/TB		6-1/4"	TB (Standard),	
L-32/9/TB	30"	9"	TA (Optional), TB-BD (Optional).	300
L-32/11/TB		11"	See Page 120	

Large Group Firering



Model O-34/TB

• Model O-34 is a large ring that offers a choice: build a large campfire in the front section, or build a smaller cooking fire under the grate. Built for large groups, the ring includes a 510 sq. inch single level cooking grate, hinged to tip over the fire or out of the ring. Cooking height is 9". The ring is built from 1/4" thick steel plate reinforced with a 3/16" x 1-1/4" angle iron. The cooking grate assembly includes: 1/4" thick flat steel bar perimeter frame; 1/2" dia. grate bars; 5/8" dia. handle bar with coiled steel bar grips. Tip back anchor pins secure the unit in place. Finished with high temp, non-toxic black paint.

Model	Inside Dimension	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)
O-34/TB	34 x 40"	6"	TB (Standard), TA (Optional) See Page 120	510

ADA Guidelines for Campfire Rings



The Final Guidelines for Federal Outdoor Recreation Sites include reach and operability specifications for campfire rings as follows:


1011.5.1 Fire Building Surfaces: Fire building surfaces shall be 9 inches minimum above the ground.

1011.5.2 Cooking Surface: Where provided, cooking surfaces shall be 15 inches minimum and 34 inches maximum above the ground.

1011.5.3 Raised Edges or Walls: Where fire rings are constructed with raised edges or walls, the depth of the raised edge or wall shall be 10 inches maximum.

309.4 Operation: Operable parts shall be operable with one hand and shall not require tight grasping, pinching or twisting of the wrist. The force required to activate operable parts shall be 5 pounds maximum.

R.J. Thomas Mfg. builds a variety of wheelchair accessible and ADA compliant campfire rings. We build our campfire rings to withstand the use and abuse of public campgrounds. On most firerings the cooking grate is designed to be



indestructible (two people could stand on it without deformation), but this makes it too heavy for 309.4. Our Model FSW-30/18/PA campfire ring scores highest on all points of accessibility. The swivel grate is lighter weight, meets all the requirements of 309.4, but could suffer damage if abused.

Our different accessible campfire rings are designed to meet the different requirements of your installations.



Model M-32/17 accessible firering (Note: this installation did not require use of pin anchors).



Model LDW-36/18/PA Double Wall Firering with four level adjustable grate and tip-back anchors. 18" high fire barrier.



Multilevel Cooking Grate

- Model M-32 accessible campfire ring features a flat rear panel so wheelchairs can have closer access to the cooking grate and adjustment handles. The 300 sq. inch cooking grate adjusts to 4 levels between 19" and 24" above the ground. This design allows the grate to be adjusted one side at a time, using only one hand, and does not exceed 10 lbs. to lift.
- 3/16" thick steel ring, with 1" formed flange for safety and strength. The adjustment panels are cut from 3/16" steel, and also serve as heat shields.
- 300 sq. in. cooking grate is all welded 1/2" dia. steel bars supported by 5/8" dia. handle bars. 1/8" x 1/2" coiled flat steel bar handle grips. All grate bars are welded on both sides.
- Finished with high temp, non-toxic black enamel paint.
- Pin anchors provide a fixed location.
- The ring is filled with aggregate (not included) to about 10-1/2" deep to provide the elevated fire surface. This fill also insulates the ground to reduce the chance of root fires in heavily wooded areas. Drain/ draft holes are provided around the perimeter of the ring.
- Optional: Bolt on utility shelf Model S5. See Page 119.
- Optional: Heat shield, welded on. See Page 119.

Model	Inside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)
M-32/17/PA	30"	16-3/8"	PA only See Page 120	300

Multilevel Grate — Double Walled

Accessible campfire ring Model LDW-36/18/PA includes a full-height outer ring to serve as a heat barrier for the inner ring. It also features a 300 sq. inch four level adjustable cooking grate.

- 1/8" (10 ga.) outer ring with 1" formed top flange; 3/16" (7 ga.) inner ring; 17-3/8" tall fire barrier.
- Three formed steel angles welded between rings form a 2" wide air space. Both rings include a series of 1" dia. (nom.) drain/draft holes. 3/16" thick steel panels support the cooking grate in four locations and help shield grate handles from heat.
- 300 sq. in. cooking grate is all welded 1/2" dia. steel bars supported by 5/8" dia. handle bars. 1/8" x 1/2" coiled flat steel bar handle grips. All grate bars are welded on both sides.
- Includes three anchor pins (/PA) to secure ring in place. Requires aggregate fill to raise the firebed. This firering does not have a firegrate.
- Finished with high temp, non-toxic black enamel paint.
- Optional: Bolt on utility shelf. See Page 119.
- Optional: Spade anchors (/AL), bolt on. Requires aggregate fill to raise the firebed.

Model	Inside, Outside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)
LDW-36/18/PA	31-3/4",	17-3/8"	PA See Page 120	
LDW-36/18/AL	36-1/2"		AL See Page 120	300

Double Walled Firering

- This accessible campfire ring offers a full-height outer ring as a heat barrier for the inner ring. 1" dia. draft holes feed air into the space between the rings. Unit is equipped with a fire/log grate inside the ring (no aggregate fill required). Designed to accommodate a person in a wheelchair. Tip back anchor pins secure the unit in place.
- 1/8" thick steel outer ring with 1" formed flange; 3/16" thick steel inner ring; 17-3/8" tall fire barrier.
- 370 sq. inch single level cooking grate is permanently hinged to the outer ring. 380 sq. inch log grate hinged to the inner ring tips up to simplify ash clean out. The cooking and fire grates are fabricated using 5/8" dia. perimeter and handle bars with coiled steel bar grips, and 1/2" dia. grate bars. All grate bars are welded on both sides. Finished with high temp, non-toxic black enamel paint.
- Optional: Bolt on utility shelf Model S5. See Page 119.
- **Optional:** Swivel Grate (replaces flip-over grate). Meets ADA guidelines for operation and weight. *See Page 116.*



Model FSWDW-30/18/TBdouble walled campfire ring with optional
swivel grate and optional shelf.

Model	Inside, Outside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)	Fire Grate Area (Sq. In.)
FSDW-30/18/TB	26-3/8", 32"	17-3/8"	TB only See Page 120	370 Flip Over	380
FSWDW-30/18/TB	20-3/0 , 32			300 Swivel	300





(Above) Model FS-30/18/PA accessible campfire ring with standard flip-over grate. (Left) Model FSW-30/18/PA accessible campfire ring with optional swivel grate.

Single Level Cooking Grate

- The 290 sq. inch grate can be laid over the fire, or tipped over and out of the firering, but it remains permanently hinged to the ring. This taller ring, available in 18" or 24" tall designs, brings the cooking surface to a convenient height for use from a wheelchair.
- 3/16" thick steel, with 1" formed flange for strength and safety. The cooking grate uses a 3/4" dia. handle bar, 5/8" dia. perimeter bar and 1/2" dia. grate bars, and includes handle grips of 1/8" x 1/2" coiled steel. All grate bars are welded on both sides. Finished with high temp, nontoxic black enamel paint.
- Pin anchors provide a fixed location.
- The ring is filled with aggregate (not included) to about 9" deep to provide the elevated fire surface. This fill also insulates the ground to reduce the chance of root fires in heavily wooded areas. Drain/draft holes are provided around the perimeter of the ring.
- Optional: Bolt on utility shelf Model S5. See Page 119.
- Optional: Heat shield, welded on. See Page 119.
- **Optional:** Swivel Grate (replaces flip-over grate). Meets ADA guidelines for operation and weight. *See Page 116.*

Model	Inside Diameter	Side Ht.	Anchor Systems	Cooking Area (Sq. In.)	
FS-30/18/PA		16-7/8"	PA only See Page 120	290	
FS-30/24/PA		23-3/8"		Flip Over	
FSW-30/18/PA		16-7/8"		300	
FSW-30/24/PA		23-3/8"		Swivel	

These designs have been developed in conjunction with parties interested in providing accessibility in their facilities, and with design guidelines set forth by PLAE, Inc., and the USDA Forest Service in the book "Outdoor Recreation Guidelines" (FSORAG). We have also consulted the guidelines issued by ADAAG. Due to the changing nature of the ADA guidelines, we make no claim that these designs conform in every respect to current/revised ADA criteria. The purchaser must determine suitability for use in a particular facility.

Pilot Rock PANDER RINGS



Model FSW-30/18/PA Accessible Campfire Ring, 30" ID x 18" tall (nom.) with ADA compliant 300 sq. in. swivel cooking grate.

Swivel Grate — **Accessible & Standard Firerings**

- The Swivel Grate design meets the ADA guidelines for one hand operation and requires less than 5 lbs. of force to move. The 300 sq. in. single level Swivel Grate will move 180 degrees - from over the fire to completely out of the firering - for easy fire building and serving. The handle is never over the fire.
- This Swivel Grate is available on a variety of standard and wheelchair accessible campfire rings. See chart below.
- The cooking grate is a single, welded component using 1/2" dia. steel bars, mounted on a 2-3/8" OD steel tube allowing it to swivel 180 degrees. The 5/8-inch dia. operator handle includes a 1/8" x 1/2" flat bar coiled spring grip. All grate bars are welded on both sides. All firerings are finished with high temp, non-toxic black enamel paint.
- Optional: Model S5 bolt on utility shelf is available on most campfire rings. See Page 119.
- Optional: Heat Shields available on some taller firerings. See Page 119.




(Above) **Model FSW-26/18/PA/H** Accessible Firering, 24" ID, 18" tall (nom.) with ADA compliant 300 sq. in. swivel grate. Shown with optional Heat Shield.

(Below) Same firering, cooking grate is rotated 180 degrees to the outside position. The handle is never over the fire.



Model	Inside Diameter	Side Ht.	Wheelchair Accessible Height	Heat Shield Available	Anchor Systems	Swivel Cooking Grate Area (Sq. In.)
FSW-26/7/TB	24"	7-3/8"		No	TB (Standard),	
FSW-30/7/TB		7-3/8"		140	AL, TA (Optional), TB-BD	
FSW-30/9/TB	30"	9"		Yes	(FSW-30 only).	
FSW-30/11/TB		11-3/8"		162	See Page 120	
FSW-48/7/PA		7-3/8"	No			
FSW-48/9/PA	46"	9"	INO			
FSW-48/11/PA		11-3/8"		No	PA (Standard) AL Optional See Page 120	300
FSW-56/7/PA		7-3/8"				
FSW-56/9/PA	54"	9"				
FSW-56/11/PA		11-3/8"				
FSW-26/18/PA	24"	16-7/8"		Yes		
FSW-30/18/PA	20"	16-7/8"	Yes	Voc		
FSW-30/24/PA	30"	23-3/8"	Ė	Yes		
FSWDW-30/18/TB	26-3/8"	17-3/8"		No	TB Only	





Model FSW-30/9/TB Campfire Ring, 30" ID x 9" tall (nom.) with 300 sq. in. swivel cooking grate.

is never

due to its

縱

Snow Load Rated Swivel Grate — Accessible & Standard Firerings

- Our new Swivel Grate firering design is tested to withstand snow loads
 of over 569 lbs. per sq. ft. on the grate. The swivel grate is laser
 cut from 1/4-inch thick steel plate. A special 10 ga. channel brace is
 welded inside the ring to reinforce the swivel tube.
- This Swivel Grate design meets the ADA guidelines for one hand operation and requires less than 5 lbs. of force to move. The 300 sq. in. single level grate will move 180 degrees from over the fire to completely out of the fire ring for easy fire building and serving. The handle is never over the fire.
- The snow load rated Swivel Grate is available on several standard and wheelchair accessible height campfire rings. See chart below.
- The 5/8-inch dia. operator handle is welded on and includes a 1/8" x 1/2" flat bar coiled grip.
- All fire ring components are finished with a high temp non toxic black enamel paint.
- Optional: Model S5 bolt on utility shelf is available on most campfire rings. See Page 119.
- **Optional:** Heat Shields available on some taller firerings. *See Page 119.*



Detail of **Model FSW/SL-30** snow-loaded swivel grate and channel brace.



Model FSW/SL-30/24/PA Campfire Ring, 30" ID x 24" tall (nom.) with 300 sq. in. snow load rated swivel cooking grate.

Model	Inside Diameter	Side Ht.	Wheelchair Accessible Height	Heat Shield Available	Anchor Systems	Swivel Cooking Grate Area (Sq. In.)
FSW/SL-30/7/TB		7-3/8"		No	TB (Standard),	
FSW/SL-30/9/TB	30"	9"	No Yes	Yes	AL, TA (Optional), TB-BD (Optional). See Page 120 PA (Standard)	
FSW/SL-30/11/TB		11-3/8"		Yes		300
FSW/SL-30/18/PA		16-7/8"		Yes		300
FSW/SL-30/24/PA		23-3/8"	Ė	Yes	AL (Optional) See Page 120	
FSWDW/SL-30/18/TB	26-3/8"	17-3/8"		No	TB only	



Model FSW/SL-30/18/PA/H Campfire Ring, 30" ID x 18" tall (nom.) with 300 sq. in. snow load rated swivel cooking grate. Shown with optional heat shield.





In bear country?

Check out our Bear Resistant Food

Lockers on pages 78 & 79.

Pilot Rock CAMPERERINGS

Accessories For Firerings

DIG-U4 Drop-In Grate

Removable Cooking Grate for Your Firering or Fire Pit

- When you want to grill over your campfire just place Model DIG-U4 "drop-in" grate across your steel firering or other fire pit. Lift if off when you are done cooking.
- Model DIG-U4 drop in cooking grate is fabricated from a single piece of 10 ga. thick steel plate, and laser cut to form the shape and grate bars. Die-formed edge flanges add strength. It is finished with high temp, non-toxic black enamel paint. Ships fully assembled.
- Cooking area dimensions: 21-3/4" x 13-1/2". 294 sq. inches total.
- Overall dimensions: 37-1/2" long x 15-1/4" wide. Weight: 18 lbs.
- Use Model DIG-U4 with steel rings or stone/concrete fire pits.
- · Model DIG-U4 will fit:
 - Round Firerings and Fire Pits: 27" to 31" inside diameter. Square Fire Pits: 23" – 27" inside dimension.
- Optional Model DIG/S-U4 drop-in grate made using 11 ga. stainless steel. Not painted.



Model DIG-U4 Drop-in cooking grate can be used on fire pits constructed of landscaping stones with or without a steel insert.



Model DIG-U4 Drop-in cooking grate.



Model DIG/S-U4 Drop-in cooking grate on a Pilot Rock FXS-30 Series stainless steel campfire ring.

Firering Covers - Snuffer Covers Can Help You Put Out the Campfire

- Can't wait for your campfire to burn itself out? Use a Snuffer Cover to cover the fire and restrict the air supply to the fire. Has it gotten too windy for an open fire? A Snuffer Cover will help to contain and choke your fire out. Just want to protect your campfire ring from the elements when not in use? A Snuffer Cover can help with that, too.
- These fire ring covers are designed to fit Pilot Rock FA-30, FS-30, FSW-30 and FX-30 Series campfire rings with a 30" ID and 32" OD at the top flange. See chart. They may also fit other brand firerings with similar dimensions.
- Fabrication: One piece, 16 ga. pre-galvanized steel, with 1/2" formed lip around outside edge, two handles. A hole is pre-drilled so you can attach a chain or cable kit and secure the cover to the firering (kit is not included).

Snuffer Cover Number	Fits Pilot Rock Campfire Ring Series	Cover Inside Diameter	Cover Weight	
CFA-30	FA-30		17 lbs.	
CFS-30	FS-30	34-3/4"		
CFSW-30	FSW-30	34-3/4	17 IDS.	
CFX-30	FX-30 (no grate)			



Model CFA-30 Snuffer Cover on a Pilot Rock FA-30 Series campfire ring.



Model CFS-30 Snuffer Cover on a Pilot Rock FS-30 Series campfire ring.



Model CFSW-30 Snuffer Cover on a Pilot Rock FSW-30 Series campfire ring.

CAMPFIRE RINGS

Accessories For Firerings

Clean Out Shovel



- Model FCS-1 is a specially designed shovel to clean out campfire rings. You can scoop out ashes and coals without disturbing the aggregate or ground surface beneath. The front edge of the shovel is cut to a radius to match the inside curvature of most 30-inch (nom.) inside diameter firerings. The back edge is flat so you can also clean out square corners and flat surfaces found in some firerings. The handle is hinged so you can use either edge of the shovel. It will also come in handy for cleaning out larger 48" and 56" diameter firerings.
- The angle of the shovel and handle make it comfortable to use. The shovel is formed from 14 ga. steel. The 1/2" dia. steel bar handle includes our coiled steel spring grip. Finish: High temp black enamel paint. Some assembly required.



Cleanout Shovel has one curved edge cut to match the inside radius of most 30" ID campfire rings, plus a straight edge useful for square corners and flat walls found in some ring designs.

Model FCS-1 Fire ring Cleanout Shovel scoops up ashes and coals and debris from inside the ring without disturbing the base surface you want to keep under the campfire.

Utility Shelf — Bolts onto both Firerings and Heat Shields



Model S5 utility shelf provides a handy place for condiments, utensils, or pots and pans. The shelf is available on most firering models and heat shields and will not interfere with grate adjustment. Constructed from 3/16" x 7-1/8" x 9-5/8" plate steel, the shelf is finished in high temperature black enamel paint. Fasteners are included.

Optional Shelf **Model S5** as shown on Model FA-30/18 Firering



Heat Shields — for Added **Protection from Hot Surfaces**



- This optional welded-on Heat Shield is available on select Pilot Rock campfire rings (see chart below). This welded on Heat Shield can be added to new Pilot Rock firerings to give protection from hot surfaces around the outside of the ring. The 10 ga. x 8-inch high Shield provides a 7/8-inch air gap around the area of the tall firerings exposed to heat (the lower portion of these tall rings is filled with aggregate). Any debris that gets between the ring and the Shield will fall out the open bottom.
- To order a welded-on Heat Shield for your new Pilot Rock campfire ring add "/H" at the end of the model number (e.g. FS-30/18/PA/H).
- Optional: Bolt on utility shelf Model S5. See above.

Note on accessibility: Current ADA guidelines define the space around campfire rings to provide 48" of clearance. Exceptions can reduce this clearance to 36". In these tighter clearances a Heat Shield could provide an added level of safety.

Heat Shield Fits Firering Models	Outside Diameter (inches)
M-32/17/PA	32-11/16
FA-30/11, FA-30/18,	32-11/16
FS-30/18/PA, FS-30/24/PA, FS-30/11	32-11/16
FSW-26/18/PA	26-11/16
FX-30, FSW-30, FSW/SL-30 9", 11", 18" and 24" tall	32-11/16

Pilot Rock CAMPERERINGS

Firering Anchoring Systems

Firerings may be anchored in several different ways. Not all anchoring systems are available on all firerings. Check the description for each firering to determine which anchoring options are available.



TIP-BACK ANCHORS (TB)

Tip-back anchors for firerings, as specified by /TB in the model numbers, permanently locate firerings yet allow them to tip back for easy clean-out. The anchors are 1/2" dia. steel rod designed to be installed through welded-on tip-back brackets at the rear of the firering and embedded 15" into a concrete footing.





Angle spade anchors for firerings, as specified by /AL in the model numbers, secure firerings on site. The firering cannot be tipped up. The anchors are constructed of heavy 3/16" x 1-3/4" x 1-3/4" A-36 steel angle with a welded-on spade of 1/8" steel. Anchors are attached at equidistant points around the firering and installed directly into the ground without the need for concrete.



PIN ANCHORS (PA)

Pin anchors for firerings, as specified by /PA in the model numbers, permanently locate firerings. The anchors are "U" shaped 1/2" dia. steel rods and are embedded 15" into concrete footings. The anchors are installed through the draft/drain holes located around the lower perimeter of each firering. The firering cannot be tipped up.

TIP-BACK ANGLE SPADE ANCHORS (TA)



Tip-back angle spade anchors for firerings, as specified by /TA in the model numbers, secure firerings on site without concrete footings and allow the firering to tip back. Two angle spade anchors are inserted into the ground. The 1/2" dia. steel rod hinge pin is inserted through holes in each anchor and through the holes in the tip-back brackets welded to the firering. The rod is bent to secure the firering to the anchors.





TIP BACK-BOLT DOWN ANCHOR BRACKET (TB-BD)

Tip Back-Bolt Down bracket for firerings as specified by /TB-BD at end of model number. This bracket will anchor your FA-30, FS-30, FSW-30, FSW/SL-30, FX-30 and L-32 firering with tip-back tabs to an existing concrete surface. The firering will be able to tip up. Fabricated with 7 ga. (3/16") thick steel, with (3) 5/8-in. dia. holes (for 1/2 in. dia. anchor bolts). The TB-BD bracket includes fasteners to attach it to the firering tabs. It does not include the (3) surface anchor bolts.

ANG: OR KIES Pilot Rock

	PRODUCTS							
ANCHOR KITS	BIKE RAC				AMENITIES	GRILLS &		
	BENCHES	PARKING	TABLES	RECYCLING	AWENTIES	FIRERINGS		
BR-4HSA (4) 3/8" x 1-7/8" Bolt Sleeve (See ‡1)	CLB, GBA-4, GBA-6, GBA3, GBA4 (2 Kits per Bench)	BR-6DS, BR-6SS, BR-12DS, BS, BSM		SS/P-1 ^{‡4}		HCB-1		
ANC1-4 (4) 1/2" x 3" Screw Anchors (See ‡1)	APB/P (1 Kit per leg), B30, B32, OWB/P, OWRB/P, PWB, PWRB	BR20,BR30, BR31 BR102, BR104, BR106	APT/P (1 Kit per leg)	M3, M5, M7, M11, CN-TR/P-52 ^{‡4}	TB-1, APTX/P, ULT/P-1, ULT/P-2, ULT/P-4 ULT/P-3 (2 Kits per Table)	B3, B7, B8, B17, B18, RL-35, RL-36		
ANC1-4SS (4) 1/2" x 3" Stainless Steel Screw Anchors (See ‡1)						B17S		
ANC1-6 (6) 1/2" x 3" Screw Anchors (See ‡ 1)	B30C, B32C, PWB3, PWRB3							
ANC2-4 (4) 3/8" x 5" Screw Anchors (See ‡ 1)	6' & 8' B302; 21' B304 (2 Kits per 21' Bench)	BR205SS, BR210SS, BR210DS, HRP-6		CN-R/SS2-36D, CN-Q/SS4-36D, CN-R/SP3-36D				
ANC2-6 (6) 3/8" x 5" Screw Anchors (See ‡ 1)	12' & 15' B303	BR220DS, HRP-8						
ANC3-4 (4) 3/8" x 3" Screw Anchors (See ‡1)	PAB, SAB/P, PCB, PCXB, B40, B42, B60, B62, B76, B78, B80, B82, B100, B102, B120, B122, B130, B132, 4', 5', 6' BC3000, BC4000, B400, B410, B412	HRP, SRP-3, SRP-5, SRP-7, SRP-9, SRP-11, BR310DS	6' & 8' T600, 6' & 8' T700, TQ700, 6' & 8' T702 (need three kits), TQ704 (need five kits) FCT-4	CN-R/SS2-36 ^{‡4} , CN-R/SP2-32, CN-R/SS3-36, CN-AMR, CN-AMQ, CN-R/R, CN-R/D, CN-Q/D-32, CN-Q-36, CN-AMR-ASH, CN-AMQ-ASH, CN-R/SS3-ASH	6' & 8' XTX, P-22, P-23	GS-5		
ANC3-6 (6) 3/8" x 3" Screw Anchors (See ‡1)	PAB3, SAB3/P, PCB3, PCXB3, B40C, B42C, B110, 8' BC3002, 8' BC4002	ORP, SRP-13, BR320DS	10' T600		10' XTX			
ANC4-4 (4) 1/2" x 3-3/4" Wedge Anchors (See ‡1)	B90, B94							
ANC5-4 (4) 1/2" x 5" Screw Anchors (See ‡1)			PT/P, PQT/P, T400 TPT/P, CST/P (1 kit per post)	CN-VDT/P-32 ^{‡4} , BPRT1-36 ^{‡4}	TB/P-2 BPFL ^{‡4}			
ANC5-6 (6) 1/2" x 5" Screw Anchors (See ‡1)				BPRT2-72 ^{‡4} , BPRT3-108 ^{‡4}				
ANC6-4 (4) 1/4" x 1-3/4" Screw Anchors (See ‡1)	Used with all ANG-3 and ANG-5 Strap Anchors on Page 118		NOTES: 1. All BR-4HSA, ANC1, ANC2, ANC3, ANC4, ANC5, and ANC6 Anchor Kits are for concrete surface installations only.					
ANC11-3 (3) 3/4" x 17-3/4" Anchor Stakes (See ‡2)		CSL-6, CSL-8 SB-6, SB-8	 ANC11 and ANC12 Anchor Kits are for asphalt or ground surface installations only. Models Q3-2460, P-1000, and L-1500 Grills include (4) 1/2" x 6" J-bolts for embedding into concrete footings. (Install when concrete is poured.) Model SS/P-1, Models CN-TR/P-52, trash receptacles, and Model CN-VDT/P-32 					
ANC12-3 (3) 3/4" x 24" Anchor Stakes (See ‡2)		CSL-6, CSL-8 SB-6, SB-8	trash can cover, and all Model BPRT bear resistant receptacles and Model BPFL bear resistant food lockers each include a set of anchor bolts. Order replacement anchor kits above.					

Pilot Rock ANG: OR SYSTEMS

Anchor Systems - Tables and Benches




Strap Anchor:

One pair, secure tables with steel tube frames. 1/4" dia. holes. Anchor bolts not included.

Model ANG-3: fits 2-3/8" OD frames - XT, XTH, WXT, WXTH, and BTXG tables.

Model ANG-5: fits 1-5/8" OD frames - UT, UTH, UTK, BTUG, and SQT tables.

Note: We recommend using 2 pairs for most tables.



Auger Anchor:

Screw-type auger; 1/2" diameter steel shaft with 3-1/2" dia. auger. Screw into ground until only "eye" is exposed. Includes 30" long heavy link chain secured to stake with cold shut. Optional Model PL-1 padlock can secure chain to table. Model AGS-1.



Angle Anchor:

One pair of formed steel angles. Use with AT, AFT, and RT tables and RB benches. Angles attach to frames with included screws. Then secure to surface with 3/8" dia. bolts appropriate for mounting surface (not included). Use one pair per frame. Model ANG-2.

Note: We recommend using 2 pairs for most tables and benches.

Drive-in Ground Anchor:

Driven deep into ground with heavy hammer and optional drive stake. Attaches to table or bench with wire rope and/or heavy chain.

Optional Model PL-1 padlock secures wire rope to bench/table.



Model 68-AT1: 1100 lb. capacity, 3/16" x 5 ft. galvanized wire rope. Model 88-AT1: 3000 lb. capacity, 1/4" x 6 ft. galvanized wire rope. Model 68-ATC: 1100 lb. capacity, 1/4" x 4 ft. proof coil chain with 1 ft. wire rope.

Model 88-ATC: 3000 lb. capacity, 1/4" x 4 ft. proof coil chain with 2 ft. wire rope.

Drive Rods:

Model DS-68: 1/2" x 3 ft. steel rod with large striking head. Use with #68-AT1 and #68-ATC anchors.

Model DS-1: 3/4" x 4 ft. steel rod tapered to 1/2", heavy-duty frequent use. Use with #68-AT1 and #68-ATC.

Model DS-2: 3/4" x 4 ft. steel rod. For use with #88-AT1 and #88-ATC.



California Customers

Please be advised . .

This notice is pursuant to California Health and Safety Code section 25249.5 et seq. ("Prop 65") and one of its enabling regulations at 27 CCR § 25600.2(b) (effective 30 August 2018). California law requires any company to declare if their products contain certain substances, as so listed on https://oehha.ca.gov/proposition-65/ proposition-65-list and those products are sold in California.

PRODUCTS USING LUMBER WARNING:

(Benches, Picnic Tables, Trash Receptacles)

Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the state of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection.

GRILL & CAMPFIRE RING WARNING:

This product can expose you to Carbon Monoxide, which is a combustion by-product known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. Carbon monoxide can replace oxygen in the bloodstream. Reduced levels of oxygen during pregnancy can affect development of the baby's brain. Carbon monoxide is a colorless, odorless and poisonous gas that is formed during the combustion of various fuels in park grills and campfire rings - including propane, wood and charcoal. The exposure is not from the grill or the campfire ring, but from the fuel used. Exposure occurs by breathing air that contains carbon monoxide.

To reduce exposure to carbon monoxide: Ensure that grills and campfire rings are installed correctly outdoors and maintained properly. Never use charcoal or propane grills or barbecues, or campfire rings indoors.

For any questions concerning Proposition 65 refer to: https://oehha.ca.gov/proposition-65/law/proposition-65-law-and-regulations





Shop Online at pilotrock.com

Join our e-newsletter for the latest information and promotions . . . go to pilotrock.com

PRODUCT WARRANTY

TERM	PRODUCT	OTHER INFORMATION	REQUIREMENTS	EXCLUSIONS	
LIFETIME	Picnic Table Frames: UT, UTH, XT, XTH, WXT, WXTH	Original Owner Only	All products must: 1) be assembled and installed	Vandalism. Damage caused by incorrect assembly, installation, application (use), or negligence. Natural or manmade disasters. Cosmetic changes due to weathering including paint fading, discoloration of wood, or color fading or spotting of coated steel and recycled plastic	
ONE YEAR	Powder Coat, Enamel, & High Heat Paints; Lumber; Trash & Recycling Lids & Liners; Plaques; Decals; Resin Fill; Umbrellas; Pet Waste Stations; FSW Swivel Grate	No Warranty on Lumber shipped outside the United States. Water Repellant recommended on Lumber.	according to manufacturer's specifications and instructions. 2) be properly maintained		
FIVE YEARS	Thermo-Plastic Coating	Limited and Prorated Warranty on coating material against defects when subjected to normal use and proper maintenance.	3) not have been altered by the addition or deletion of parts, or modified in any other manner.	products caused by exposure to natural elements or chemicals. Scratches, dents, or marring caused by normal use and public exposure.	
	Picnic Table Frames (those not included in Lifetime Warranty), Park Bench Frames, Steel and Aluminum Bench and Table seat/top Structures, Recycled	Recycled Plastic warranty applies only to components that have been cut, drilled, or routed by the manufacturer. This warranty does NOT cover plastic purchased in raw stock form by customer and cut, drilled, or routed by customer for custom application. Recycled Plastic and Thermo-Plastic coated components include a UV stabilizer to retard effects of natural exposure. We cannot warrant "fading" or surface "contamination" due to extreme variations in levels of exposure and in the definition of "fading".		Seasons checks, twisting, or splintering of wood caused by climatic differences or lack of propmaintenance. Loss or damage in transit while	
	Plastic Components, Bike Racks, TRH and TRQ Frames, Steel Trash Receptacle and Planter Structures. Pedestal			product is responsibility of carrier. High heat paint subject to overly built fires.	
	Mounts, Tissue Holders, all Grills, Hot Coal Bin, Utility			Steel warpage caused by fires of excessive size or duration	
	Tables, Campfire Rings, Lantern Holders, Food Lockers, Kolor Cans.			Premature rust-through of grill boxes due to improper cleaning or maintenance, and fire rings buried in the ground.	
FIFTY YEARS	Recycled Plastic	Material decomposition only.		Premature rusting or discoloring caused by corrosive environment or while in ocean transit.	
				Damage caused by animals or wildlife.	

Except as specifically stated herein, all warranties (expressed or implied) are hereby excluded. This Warranty excludes any liability, consequential damages, or related costs.

ORDERING INFORMATION

Write Purchase Orders and Payments to: R. J. Thomas Mfg. Co., Inc. R. J. Thomas Mfg. Co., Inc. is a small business.

GSA Contracts are available for federal accounts. Contact Customer Service for Contract information.

PRICE: All prices are F.O.B. Cherokee, Iowa. Prices subject to change without notice. Quantity discounts and freight allowance available.

TERMS: Net due 30 days from date of invoice to those with established credit. First time orders and others: prepayment in full before shipment. Finance charges after 30 days. Payment by credit card is accepted using:









FREIGHT: Prepaid and added to the invoice, or third-party billed. Weights listed are approximate and do not include packaging. Shipment will be made by the guickest, most economical and practical means possible. Call for freight estimate. Most products are shipped unassembled to minimize shipping costs. Detailed assembly instructions are included with fasteners.

LEAD TIMES: We encourage you to order as early as possible. Our usual lead times run four weeks. Busy season lead times can reach to six to eight weeks. When you order early we can better arrange delivery to meet your needs.

SPECIFICATIONS: Specifications were in effect when printing this catalog. Since product improvements are always being made, we reserve the right to change designs, specifications and discontinue products without notice. Where changes have been made, revised products will be shipped unless specific arrangements have been made to the contrary.

ADDITIONAL INFORMATION: Contact us if you require additional information on product specifications, assembly, or installation. Spec Bulletins are available on our web site.

MODIFICATIONS: If a desired combination of features, materials, options, or accessories is not covered in this catalog, contact us and we will advise as to availability and price.

RETURN POLICY: No returns are accepted without prior approval. Call Customer Service for a Return Authorization (RA) number. Requests must be made within thirty days of receipt of product. No returns will be accepted after thirty days. Products must be returned in original packaging, must not be used or damaged, and must be in resalable condition. Returns may be subject to a restocking charge. Return freight must be prepaid.

ORDER CANCELLATION: Orders may be cancelled prior to shipment. Conditions will vary. Orders with custom plagues/engraving, etc. cannot be cancelled once we receive final design approval. Orders cancelled after shipment are subject to return freight charges and restocking fees.

